

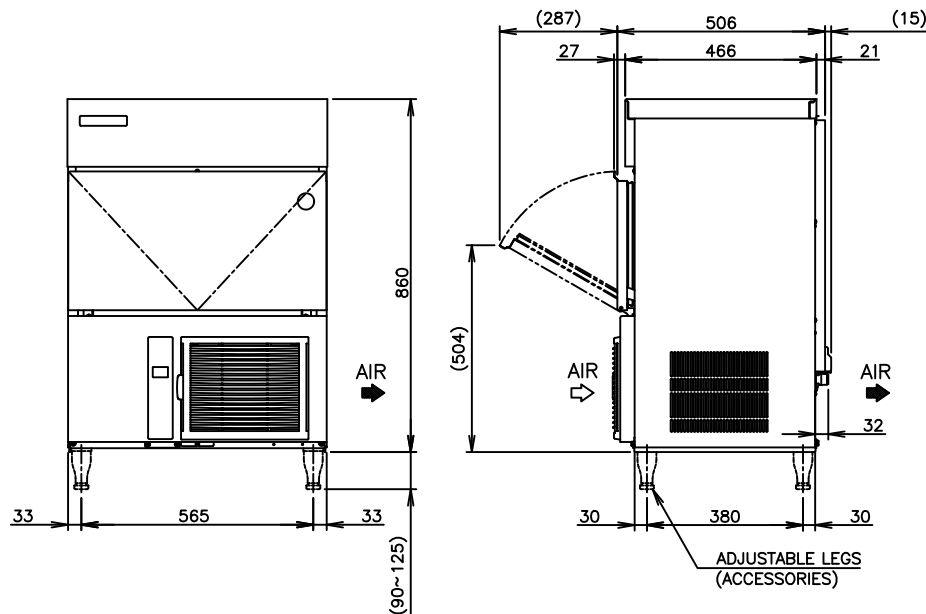


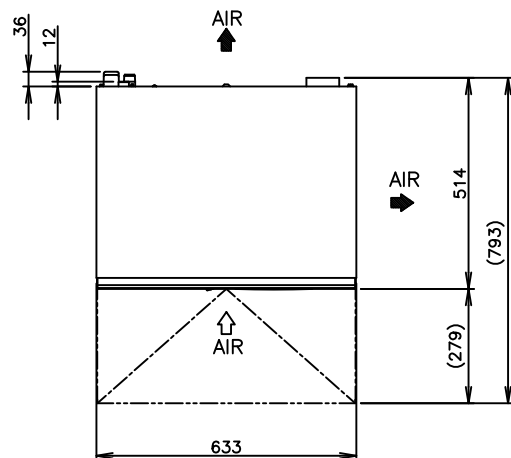

1. Install the product properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual.
3. Product Code: M142-C161(HPH)

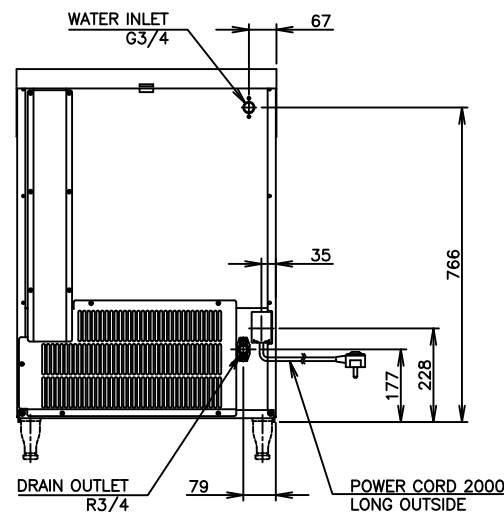

ITEM	Hoshizaki Big Ice Maker		
MODEL	IM-65NS-LM		
POWER SUPPLY	1 PHASE 220V 60Hz Capacity: Min. 1.02kVA (4.7A)		
AMPERAGE	Running: 2.5A Rated Motor: 2.5A Starting: 17A		
ELECTRIC CONSUMPTION	Rated Motor: 370W (Power factor: 67%)		
ICE PRODUCTION PER 24h	43kg (10mm) (Ambient Temp.10° C, Water Temp.10° C)		
	33kg (10mm) (Ambient Temp.21° C, Water Temp.15° C)		
	28kg (10mm) (Ambient Temp.32° C, Water Temp.21° C)		
WATER CONSUMPTION PER 24h	Approx. 0.80m³ (Ambient Temp.10° C, Water Temp.10° C)		
	Approx. 0.08m³ (Ambient Temp.21° C, Water Temp.15° C)		
	Approx. 0.07m³ (Ambient Temp.32° C, Water Temp.21° C)		
SHAPE OF ICE	Cube Approx. 48×48×58mm		
FREEZE CYCLE TIME	Approx. 60min (Ambient Temp.21° C, Water Temp.15° C)		
ICE PRODUCTION PER CYCLE	Approx. 1.44kg/12pcs (Ambient Temp.21° C, Water Temp.15° C)		
MAX STORAGE CAPACITY	Approx. 26kg (Bin Control Setting Approx. 18kg)		
OUTSIDE DIMENSIONS	633mm(W)×506mm(D)×860mm(H)		
EXTERIOR	Stainless Steel, Galvanized Steel (Rear)		
INSULATION	Polyurethane Foam		
INSULATION FOAM BLOWING AGENT	Water Blown		
CONNECTIONS-ELECTRIC	X-Type Con. (with Plug)		
CONNECTIONS-WATER SUPPLY	Inlet G3/4 (connected at rear side)		
CONNECTIONS-DRAIN	Outlet R3/4 (connected at rear side)		
ICE MAKING SYSTEM	Cell type		
HARVESTING SYSTEM	Hot Gas Defrost		
COMPRESSOR	Hermetic		
CONDENSER	Air-cooled, Fin and Tube type		
HEAT REJECTION	815W (700kcal/h) (Ambient Temp.32° C, Water Temp.21° C)		
EVAPORATOR	Tin-plated Copper Tube on Sheet and Cells		
REFRIGERANT CONTROL	Capillary Tube		
REFRIGERANT CHARGE	R134a/220g		
ICE MAKING CONTROL SYSTEM	Thermistor, Timer		Controller Board
HARVESTING CONTROL SYSTEM	Thermistor		
BIN CONTROL	Microswitch with Time Delay		
ICE MAKING WATER CONTROL SYSTEM	Timer, Water Pan's movement		
ELECTRICAL PROTECTION	Class I Appliance, 5A Fuse		
COMPRESSOR PROTECTION	Auto-reset Overload Protector		
ICE MAKER PROTECTION	Interlock by Controller Board		
NET WEIGHT	Net weight 53kg/Gross weight 61kg		
PACKAGE	Carton 735mm(W)×570mm(D)×1012mm(H)		
ACCESSORIES	Scoop, Leg, Installation Kit		
OPERATING CONDITIONS	Ambient Temp.: 1 - 40° C, Water Supply Temp.: 5-35° C Water Supply Pressure: 0.07-0.8MPa (0.7-8bar) Voltage Range: Rated Voltage±6%		

*We reserve the right to make changes in specifications and design without prior notice.