



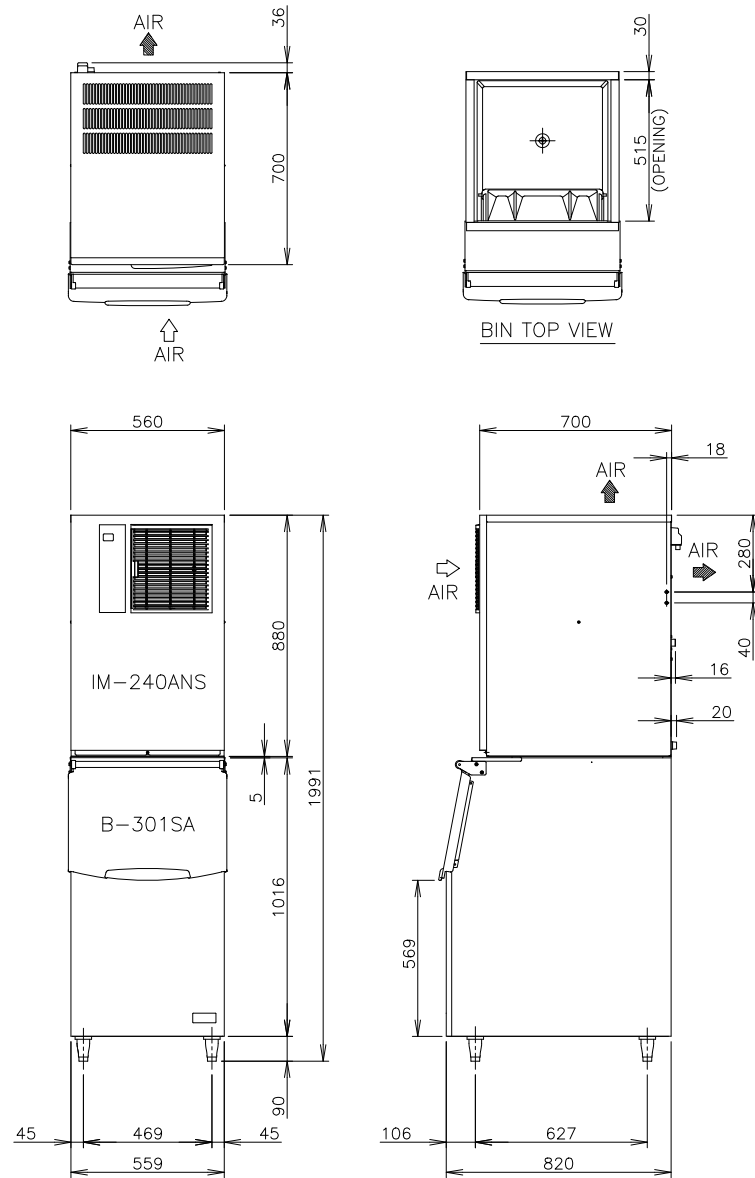

1. Install the ice maker properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The ice production depends on the ambient and water temperatures.
Refer to the instruction manual.
3. Product code: M145–C250,M145–C251
M145–C252,M145–C253
M145–C254,G006

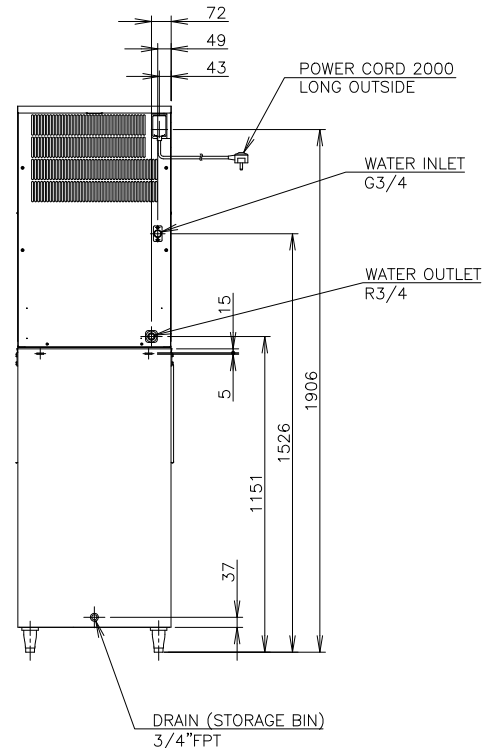

ITEM	Hoshizaki Cube Ice Maker		
MODEL	IM-240ANS-B-301SA		
AC SUPPLY VOLTAGE	1 PHASE 220-240V 50Hz		
AMPERAGE	6.6A (AT.32℃, WT.21℃)		
STARTING AMPERAGE	35A		
ELECTRIC CONSUMPTION	1320W (AT.32℃, WT.21℃)		
POWER FACTOR	83%		
POWER SUPPLY CAPACITY	Min. 2.3kVA (9.6A)		
ICE PRODUCTION PER 24h	Approx. 220(5mm)/240(15mm)kg (AT.10℃, WT.10℃)		
	Approx. 205(5mm)/220(15mm)kg (AT.21℃, WT.15℃)		
	Approx. 160(5mm)/190(15mm)kg (AT.32℃, WT.21℃)		
WATER CONSUMPTION PER 24h	Approx. 0.73m ³ (AT.10℃, WT.10℃)		
	Approx. 0.36m ³ (AT.21℃, WT.15℃)		
	Approx. 0.28m ³ (AT.32℃, WT.21℃)		
SHAPE OF ICE	Cube Approx. 28×28×32mm		
FREEZE CYCLE TIME	Approx. 20min (AT.21℃, WT.15℃)		
ICE PRODUCTION PER CYCLE	Approx. 3.2kg/140.pcs (AT.21℃, WT.15℃)		
MAX STORAGE CAPACITY	Approx. 118kg		
	Maximum 144kg		
DIMENSIONS	560mm(W)×820mm(D)×1991(~2021)mm(H)		
EXTERIOR	Stainless Steel		
BIN	EXTERIOR Stainless Steel, Galvanized Steel(Rear)		
	Plastic Door		
	INTERIOR Polyethylene		
INSULATION FOAM BLOWING AGENT	Cyclopentane/CFC Free/ODP: 0/GWP: 3		
CONNECTIONS-ELECTRIC	X-Type Con. (with CONT. Plug)		
CONNECTIONS-WATER SUPPLY	Inlet G3/4 (connected at rear side)		
CONNECTIONS-DRAIN	Outlet R3/4 (connected at rear side)		
ICE MAKING SYSTEM	Cell type		
HARVESTING SYSTEM	Hot Gas Defrost		
COMPRESSOR	Hermetic		
CONDENSER	Air-cooled, Fin and Tube type		
HEAT REJECTION	2870W(2470kcal/h) (AT.32℃, WT.21℃)		
EVAPORATOR	Copper Tube on Sheet and Cells		
REFRIGERANT CONTROL	Thermostatic Expansion Valve		
REFRIGERANT CHARGE	R404A/480g		
ICE MAKING CONTROL SYSTEM	Thermistor, Timer	Controller Board	
HARVESTING CONTROL SYSTEM	Thermistor		
BIN CONTROL SYSTEM	Microswitch with Time Delay		
ICE MAKING WATER CONTROL SYSTEM	Timer, Water Pan's movement		
ELECTRICAL PROTECTION	Class I Appliance, 5A Fuse		
COMPRESSOR PROTECTION	Auto-reset Overload Protector		
ICE MAKER PROTECTION	Interlock by Controller Board		
WEIGHT	117kg Ice Maker: Net weight 80kg/Gross weight 95kg Storage Bin: Net weight 37kg/Gross weight 49kg		
PACKAGE	Ice Maker: Carton 665mm(W)×820mm(D)×1054mm(H) Storage Bin: Carton 655mm(W)×924mm(D)×1138mm(H)		
ACCESSORIES	Scoop, Leg(4 pcs), Installation Kit, Ice Chute		
OPERATING CONDITIONS	Ambient Temp.: 1 - 40° C, Water Supply Temp.: 5-35℃ Water Supply Pressure: 0.07-0.78MPa(0.7-8bar), Voltage Range: Rated Voltage±6%		

*We reserve the right to make changes in specifications and design without prior notice.