
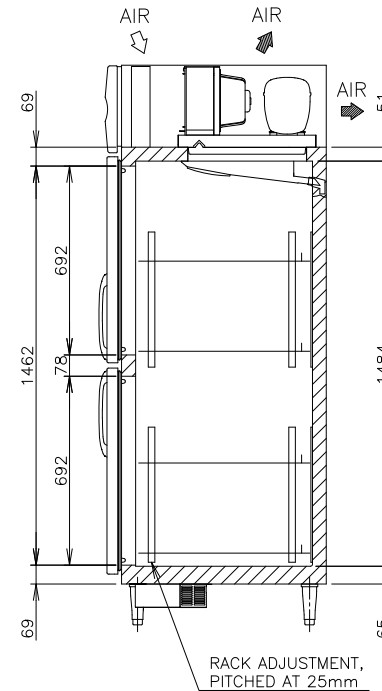
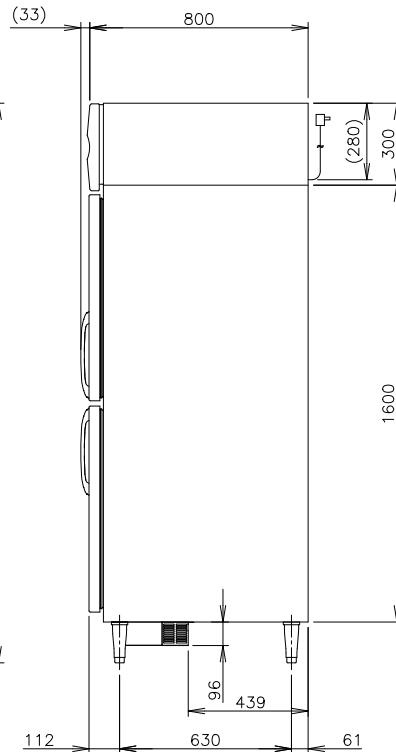
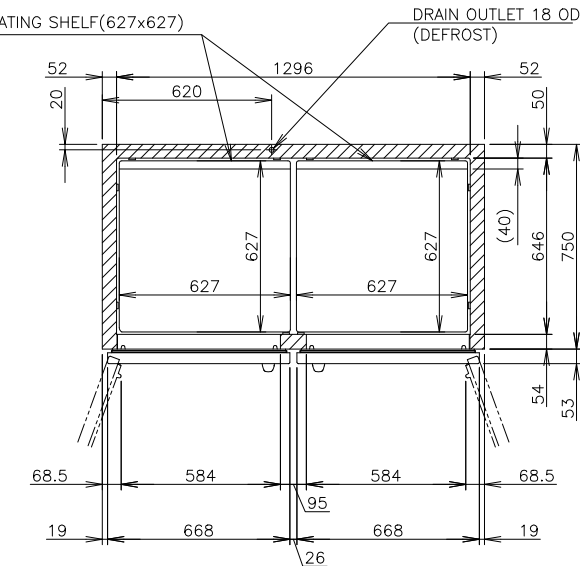


POWER CORD 2000 LONG OUTSIDE
(PLUG WITH EARTH WIRE)

COATING SHELF(627x627)

DRAIN OUTLET 18 OD
(DEFROST)

PHILIPPINES PLUG

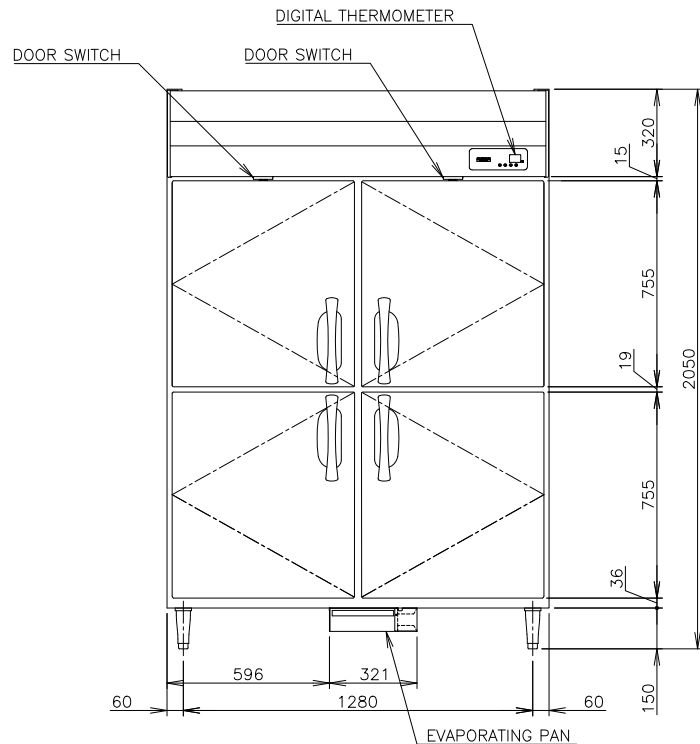

ITEM	Hoshizaki Reach-in Freezer
MODEL	HFE-148SC-P
POWER SUPPLY	1 Phase 230V~ 60Hz Capacity: 0.61kVA (2.80A)
AMPERAGE	Rated: 3.3A Starting: 6.50A
ELECTRIC CONSUMPTION	MOTOR 360W(POWER FACTOR 95%) Heater641W Refrigeration 580W Defrost 350W
HEAT REJECTION	1382W
POWER CORD	2.0m (Plug with Earth Wire)
EFFECTIVE CAPACITY	1297L
OUTSIDE DIMENSIONS	1400mm(W)×800mm(D)×2050(−2080)mm(H)
INSIDE DIMENSIONS	1296mm(W)×646mm(D)×1484mm(H)
EXTERIOR	Stainless Steel, Galvanized Steel (Rear / Bottom), PP (Handle on Door)
INTERIOR	Stainless Steel, ABS Plastic
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
DEFROST SYSTEM	Heater
COMPRESSOR	Hermetic, Inverter
CONDENSER	Fin and Tube type, Air-cooled
EVAPORATOR	Fin and Tube type
REFRIGERANT	R290 / 120g
TEMPERATURE CONTROL	Microprocesso controlled Adjustable from −25 to −7° C
DEFROST CONTROL	Microprocessor
ELECTRIC CIRCUIT PROTECTION	Earth Wire, Circuit Breaker
COMPRESSOR PROTECTION	Inverter Protector (Auto-reset)
LEG	Plastic Adjustable from 150 to 180mm
SHELF	8 pcs.
WEIGHT	Net: 160kg (Gross:Approx. 190kg)
PACKAGE	Carton (Wooden Pallet) 1460mm(W)×920mm(D)×2075mm(H)
ACCESSORIES	Drain Hose×1, Drain Pan ×1
OPERATING CONDITIONS	Ambient Temperature: 5–43°C Voltage Range: Rated Voltage±6%

*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, water supply/ drain connections and electrical connections stated in the instruction and installation manuals provided.
Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 35°.
3. Product Code: S192-C300