


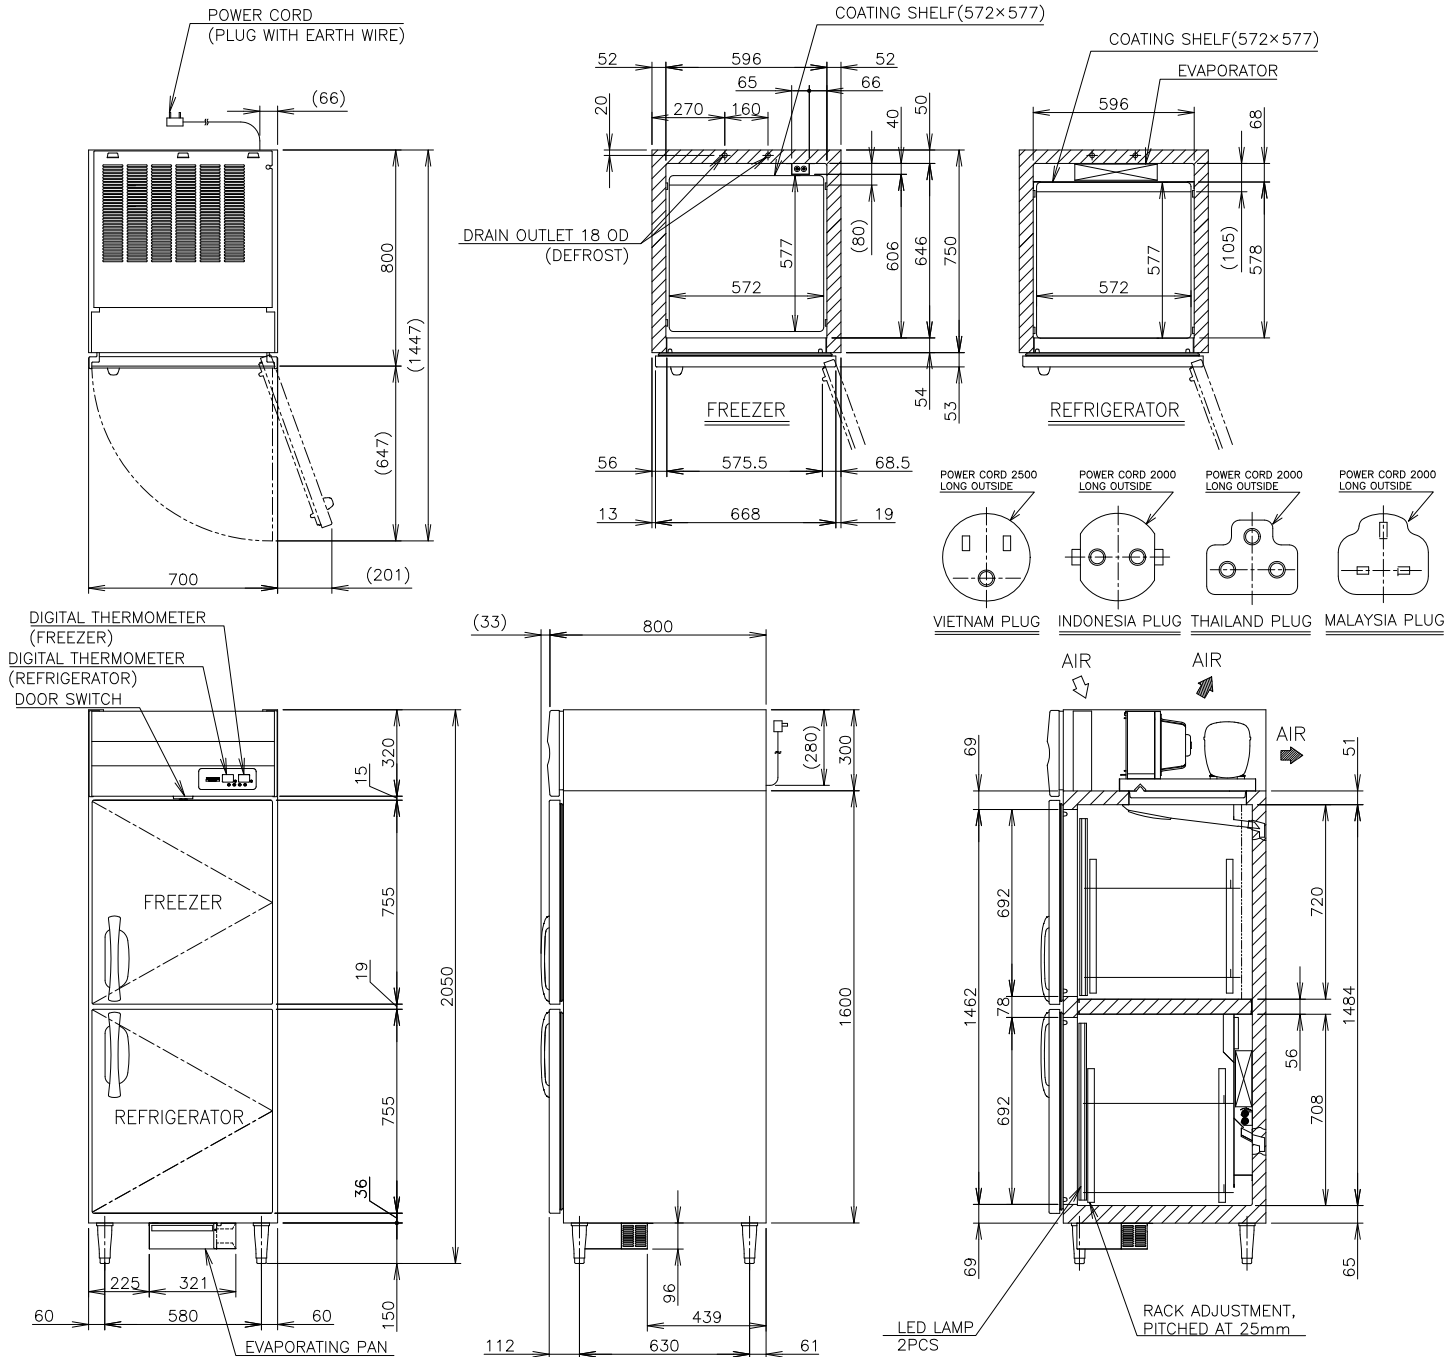

ITEM	Hoshizaki Reach-in Freezer/Refrigerator	
MODEL	HRFE-78SC-S	
POWER SUPPLY	1 Phase 220~240V 50Hz Capacity: 0.49kVA (2.20A)	
AMPERAGE	Rated: 2.9A	
ELECTRIC CONSUMPTION	MOTOR 204W(POWER FACTOR 62%) Heater 577W Refrigeration 372W Defrost 390W	
HEAT REJECTION	752W	
POWER CORD	Plug with Earth Wire	
EFFECTIVE CAPACITY	Total 540L (Refrigerator: 265L, Freezer: 275L)	
OUTSIDE DIMENSIONS	700mm(W)×800mm(D)×2050(−2080)mm(H)	
INSIDE DIMENSIONS	Refrigerator	596mm(W)×578mm(D)×708mm(H)
	Freezer	596mm(W)×606mm(D)×720mm(H)
EXTERIOR	Stainless Steel, Galvanized Steel (Rear / Bottom), PP (Handle on Door)	
INTERIOR	Stainless Steel, ABS Plastic	
INSULATION	Polyurethane Foam	
INSULATION FOAM BLOWING AGENT	Cyclopentane	
REFRIGERATION SYSTEM	Forced Air Circulation	
DEFROST SYSTEM	Refrigerator	Heater
	Freezer	Heater
COMPRESSOR	Hermetic, Inverter	
CONDENSER	Fin and Tube type, Air-cooled	
EVAPORATOR	Refrigerator	Fin and Tube type
	Freezer	Fin and Tube type
REFRIGERANT	R290	
TEMPERATURE CONTROL	Refrigerator	Microprocesso controlled Adjustable from −6 to 12° C
	Freezer	Microprocesso controlled Adjustable from −25 to −7° C
DEFROST CONTROL	Microprocessor	
ELECTRIC CIRCUIT PROTECTION	Earth Wire, Circuit Breaker	
COMPRESSOR PROTECTION	Inverter Protector (Auto-reset)	
LEG	Plastic Adjustable from 150 to 180mm	
SHELF	4 pcs.	
WEIGHT	Net: 113kg (Gross:Approx. 133kg)	
PACKAGE	Carton (Wooden Pallet) 760mm(W)×900mm(D)×2075mm(H)	
ACCESSORIES	Drain Hose×1, Evaporating Pan×1	
OPERATING CONDITIONS	Ambient Temperature: 5−43°C Voltage Range: Rated Voltage ±6%	

*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, water supply/ drain connections and electrical connections stated in the instruction and installation manuals provided.
Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 35°C.
3. Product Code: S194-V100 HVN
S194-V200 HID
S194-V300 HTH
S194-V400 HMS

HOSHIZAKI REACH-IN FREEZER/REFRIGERATOR HRFE-78SC-S

APPROVED LIANG	CHECKED LIANG	DESIGNED KATO	DRAWN LIU	SCALE 1/20	TRIGONOMETRY
**	**	△	****	DATE 2026.04.02	DRAWING NO. D45856
APPROVED	DESIGNED	SYMBOL	DATE		SYMBOL △