

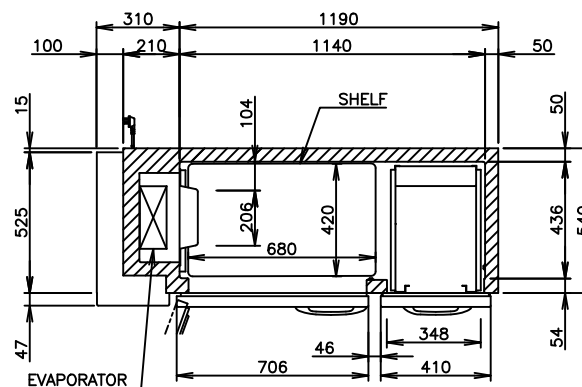


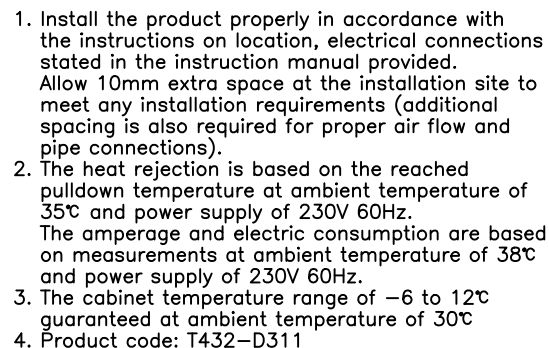

ITEM	Hoshizaki Undercounter Refrigerator
MODEL	RT-156MC-P-3D
POWER SUPPLY	1 Phase 230V 60Hz Capacity: 0.71kVA (3.1A)
AMPERAGE	Rated 1.6A
ELECTRIC CONSUMPTION	Motor 207W(Power Factor 73%) Heater 216W Refrigeration 233W Defrost 190W
HEAT REJECTION	674W
POWER CORD	2.0m (Plug with Earth Wire)
EFFECTIVE CAPACITY	322L
OUTSIDE DIMENSIONS	1500mm (W) x 600mm (D) x 850(-880) mm (H)
INSIDE DIMENSIONS	1140mm (W) x 436mm (D) x 599mm (H)
EXTERIOR	Stainless Steel Galvanized Steel (Rear/Bottom)
INTERIOR	Stainless Steel, Stainless Pack (Door)
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
DEFROST SYSTEM	Glass Tube Heater
COMPRESSOR	Hermetic
CONDENSER	Wire and Tube type, Air-cooled
EVAPORATOR	Fin and Tube Type
REFRIGERANT	R290
TEMPERATURE CONTROL	Microprocessor (Digital Temp Indication) Adjustable from -6 to 12°C
DEFROST CONTROL	Microprocessor controlled
ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire
COMPRESSOR PROTECTION	Motor Protector
LEG	Plastic Adjustable 150 to 180mm
SHELF	2pcs.
WEIGHT	Net:91kg (Gross: Approx. 103kg)
PACKAGE	Carton 1565mm (W) x 680mm (D) x 790mm (H)
ACCESSORIES	-
OPERATING CONDITIONS	Ambient Temperature: 5-38°C Voltage Range: Rated Voltage±6%

*We reserve the right to make changes in specifications and design without prior notice.

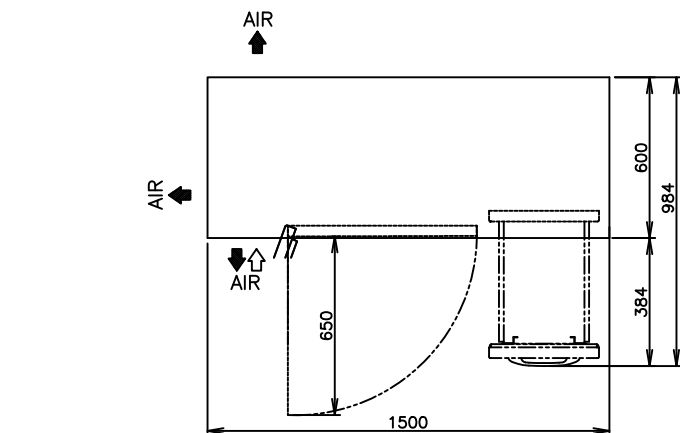