







VIEW A

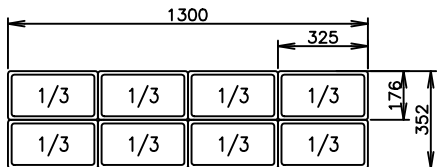

GN PAN LAYOUT

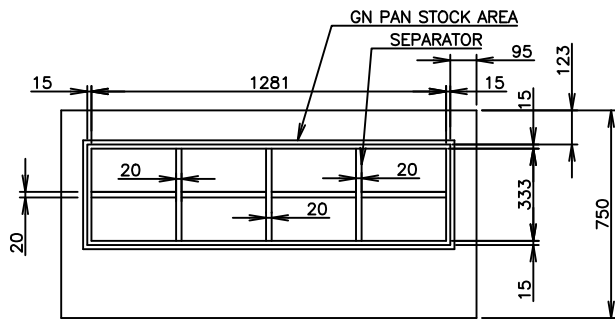

NO CUTTING BOARD;COVER A;COVER B

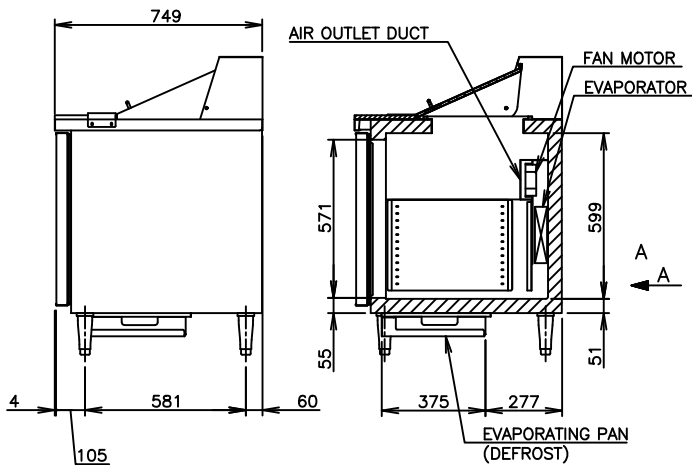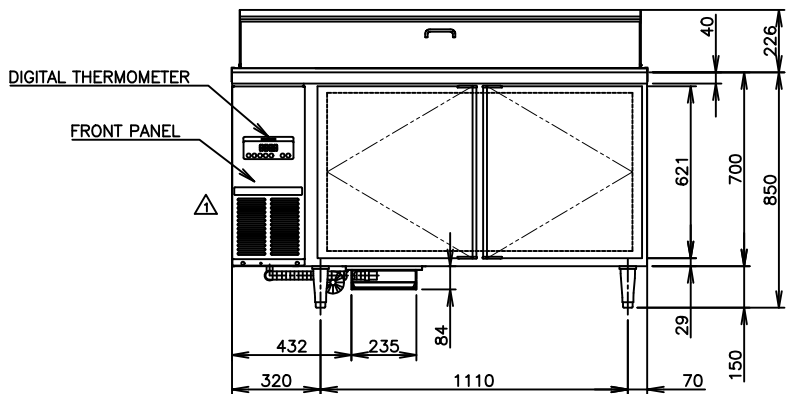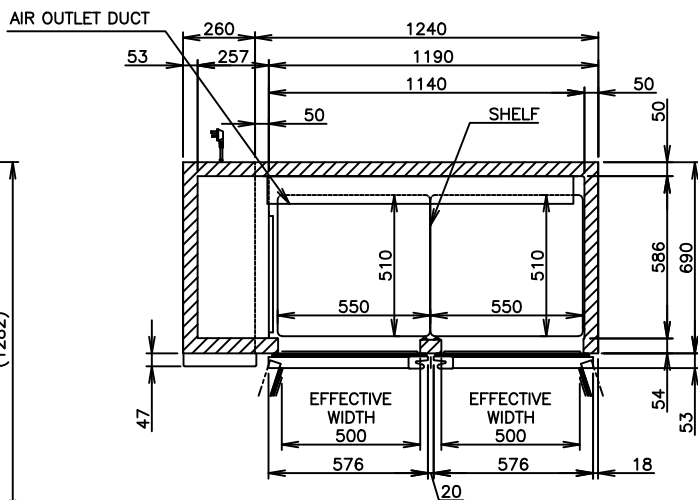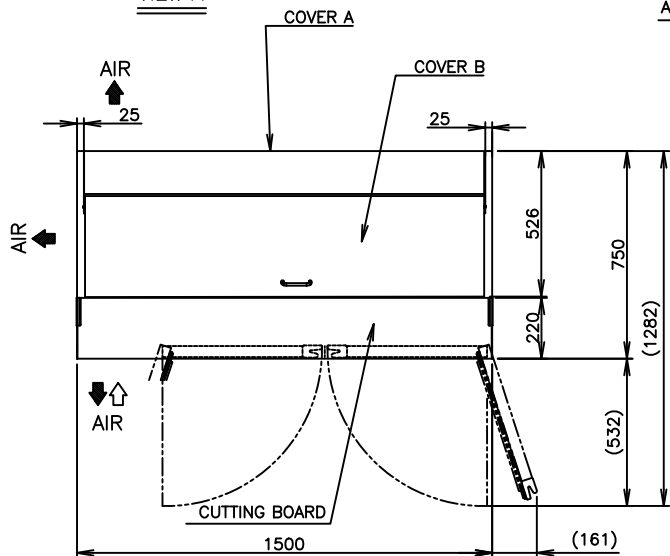

ITEM	Hoshizaki Undercounter Refrigerator
MODEL	RT-158MC-P-PRS
POWER SUPPLY	1 Phase 230V 60Hz Capacity: ***kVA (***A)
AMPERAGE	Rated ***A
ELECTRIC CONSUMPTION	Motor ***W(Power Factor **%) Heater ***W Refrigeration ***W
HEAT REJECTION	***W
POWER CORD	2.0m (Plug with Earth Wire)
EFFECTIVE CAPACITY	446L
OUTSIDE DIMENSIONS	1500mm (W) x750mm (D) x1076(-1106) mm (H)
INSIDE DIMENSIONS	1140mm (W) x 586mm (D) x 599mm (H)
EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom) ABS Plastic (Top & Bottom on Door)
INTERIOR	Stainless Steel, ABS Plastic (Door)
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
DEFROST SYSTEM	Off Cycle
COMPRESSOR	Hermetic
CONDENSER	Fin and Tube type, Air-cooled
EVAPORATOR	Fin and Tube Type
REFRIGERANT	R290
TEMPERATURE CONTROL	Microprocessor (Digital Temp Indication) Adjustable from -2 to 12℃
DEFROST CONTROL	Microprocessor controlled
ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire
COMPRESSOR PROTECTION	Motor Protector
LEG	Plastic Adjustable 150 to 180mm
SHELF	4pcs.
WEIGHT	Net: 118kg (Gross: Approx. 130kg)
PACKAGE	Carton 1565mm (W) x830mm (D) x1070mm (H)
ACCESSORIES	Drain Hose x 1, Drain Pan x 1
OPERATING CONDITIONS	Ambient Temperature: 5-38℃ Voltage Range: Rated Voltage±6%

*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided.
Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The heat rejection is based on the reached pull-down temperature at ambient temperature of 35°C and power supply of 230V 60Hz.
The amperage and electric consumption are based on measurements at ambient temperature of 38°C and power supply of 230V 60Hz.
3. The cabinet temperature range of -2 to 12°C is guaranteed at ambient temperature of 30°C.
4. Product code: T436-D303

*CUSTOMIZED

TOP PANEL OPENING

(GN PAN SIZE: 1/3x4x2; COVER+CUTTING BOARD)

APPROVED LIANGK		CHECKED ZHOU	DESIGNED ZHOU	DRAWN LXF	SCALE 1/20	TRIGONOMETRY	
LJANG	LXF		2026.03.24	DATE 2026.02.25	DRAWING NO. D44653		SYMBOL 
APPROVED	DESIGNED	SYMBOL	DATE				