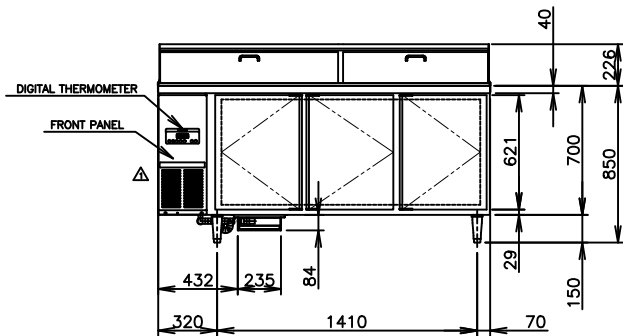
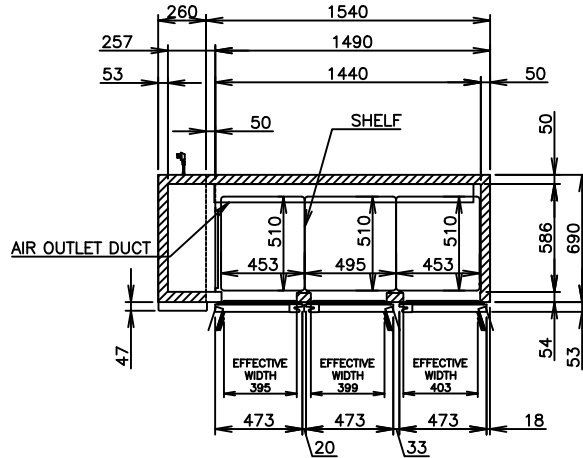
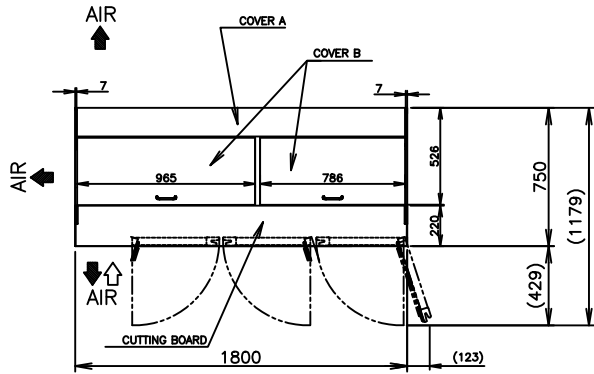
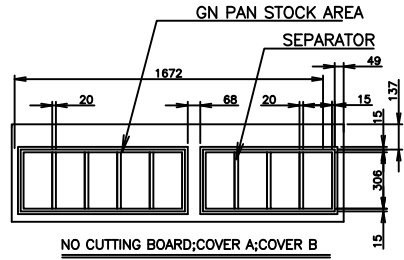




ITEM	Hoshizaki Undercounter Refrigerator
MODEL	RT-188MC-P-PRS
POWER SUPPLY	1 Phase 230V 60Hz Capacity: ***kVA (***A)
AMPERAGE	Rated ***A
ELECTRIC CONSUMPTION	Motor ***W(Power Factor **%) Heater ***W Refrigeration ***W
HEAT REJECTION	***W
POWER CORD	2.0m (Plug with Earth Wire)
EFFECTIVE CAPACITY	549L
OUTSIDE DIMENSIONS	1800mm (W) x 750mm (D) x 1076(-1106)mm (H)
INSIDE DIMENSIONS	1440mm (W) x 586mm (D) x 599mm (H)
EXTERIOR	Stainless Steel, Galvanized Steel (Rear / Bottom)
INTERIOR	ABS Plastic (Top & Bottom on Door)
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
DEFROST SYSTEM	Off Cycle
COMPRESSOR	Hermetic
CONDENSER	Fin and Tube type, Air-cooled
EVAPORATOR	Fin and Tube Type
REFRIGERANT	R290
TEMPERATURE CONTROL	Microprocessor controlled Adjustable from -2 to 12°C
DEFROST CONTROL	Microprocessor controlled
ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire
COMPRESSOR PROTECTION	Motor Protector
LEG	Plastic Adjustable 150 to 180mm
SHELF	6pcs.
WEIGHT	Net:134kg (Gross: Approx. 146kg)
PACKAGE	Carton 1865mm (W) x 830mm (D) x 1070mm (H)
ACCESSORIES	Drain Hose x 1, Drain Pan x 1
OPERATING CONDITIONS	Ambient Temperature: 5-38°C Voltage Range: Rated Voltage±6%

*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow, pipe connections).
2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 35°C and power supply of 230V 60Hz. The ampere and electric consumption are based on measurements at ambient temperature of 38°C and power supply of 230V 60Hz.
3. The cabinet temperature range of -2 to 12°C is guaranteed at ambient temperature of 30°C.
4. Product code: T437-D303

*CUSTOMIZED
TOP PANEL OPENING
(GN PAN SIZE: 1/3×9×1; COVER+CUTTING BOARD)

HOSHIZAKI UNDERCOUNTER REFRIGERATOR RT-188MC-P-PRS

APPROVED LIANGK	CHECKED ZHOU	DESIGNED ZHOU	DRAWN LXF	SCALE 1/30	TRIGONOMETRY
LIANGK	LXF	DATE 2026.03.24	DATE 2026.02.25	DRAWING NO. D44654	SYMBOL 1
APPROVED	DESIGNED	SYMBOL	DATE		