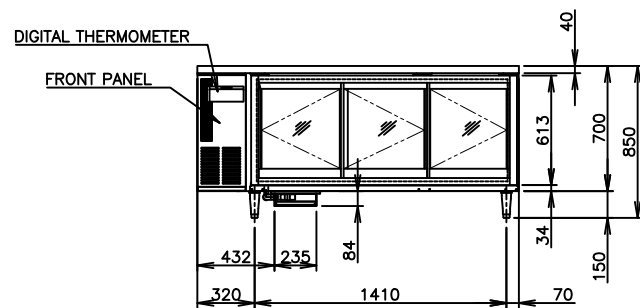


*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided.
Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow).
pipe connections).
2. The amperage and electric consumption are based on measurements at ambient temperature of 32°C and power supply of 230V 60Hz.
3. The cabinet temperature range of -2 to 12°C is guaranteed at ambient temperature of 25°C.
4. Depending on the installation environment, the glass door and the front frame of the body may dew and drop.
5. During the operation of the machine, dew will form on the surface of the glass door.
6. Product code: T437-C330

APPROVED LIANGK	CHECKED ZHOU	DESIGNED ZHOU	DRAWN LXF	SCALE 1/30	TRIGONOMETRY		
*	*	*		DATE 2026.02.24	DRAWING NO. D44636	SYMBOL 	
APPROVED	DESIGNED	SYMBOL		DATE			