


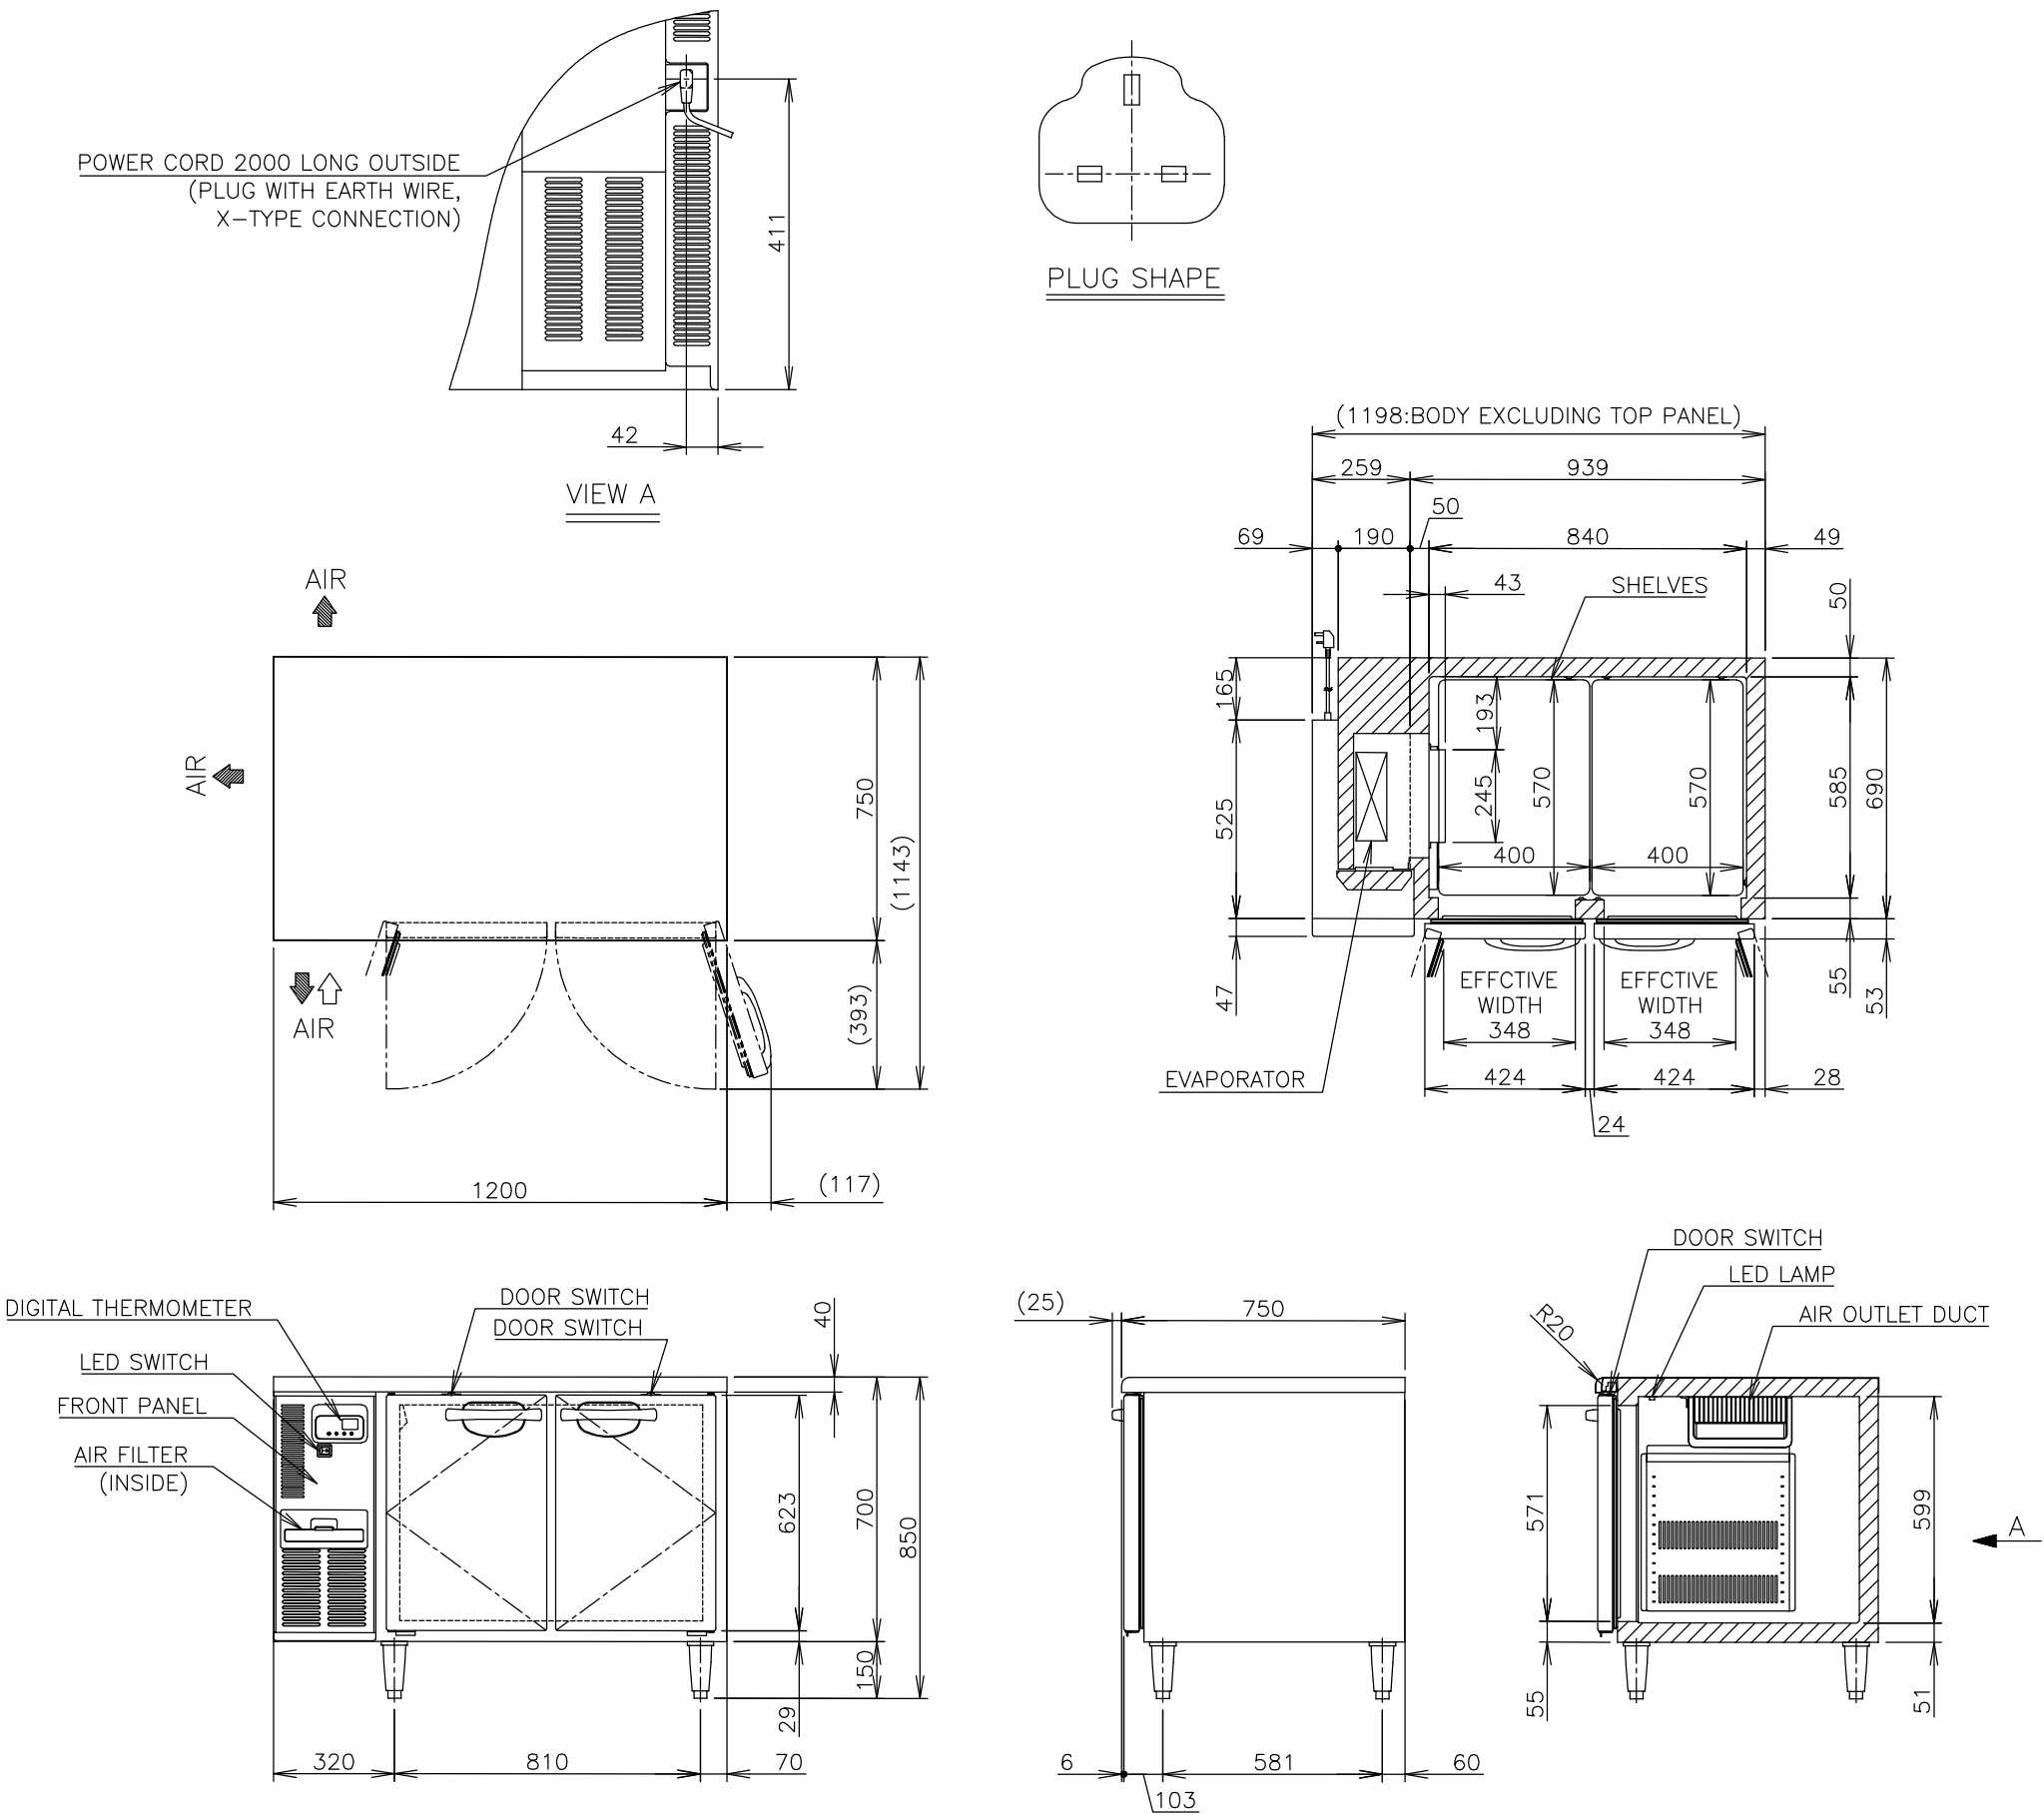

ITEM	Hoshizaki Undercounter Refrigerator
MODEL	RTE-128SC-S
POWER SUPPLY	1 Phase 220-240V~ 50Hz Capacity: 0.42kVA (1.81A)
AMPERAGE	Rated 1.4A Starting 1.93A
ELECTRIC CONSUMPTION	Motor 119W(Power Factor 39%) Heater 211W Refrigeration 140W Defrost 190W
HEAT REJECTION	410W
POWER CORD	2.0m (Plug with Earth Wire, X-Type connection)
EFFECTIVE CAPACITY	212L
OUTSIDE DIMENSIONS	1200mm (W) x 750mm (D) x 850 (-880)mm (H)
INSIDE DIMENSIONS	840mm (W) x 585mm (D) x 599mm (H)
EXTERIOR	Stainless Steel, Galvanized Steel (Rear / Bottom), PP (Handle on Door)
INTERIOR	Stainless Steel, ABS Plastic
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
DEFROST SYSTEM	Glass Tube Heater
COMPRESSOR	Hermetic, Inverter
CONDENSER	Fin and Tube type, Air-cooled
EVAPORATOR	Fin and Tube Type
REFRIGERANT	R290 / 75g
TEMPERATURE CONTROL	Microprocessor controlled Adjustable from -6 to 12°C
DEFROST CONTROL	Microprocessor controlled
ELECTRIC CIRCUIT PROTECTION	Circuit Breaker, Earth Wire
COMPRESSOR PROTECTION	Inverter Protector (Auto-reset)
LEG	Plastic Adjustable 150 to 180mm
SHELF	4pcs.
WEIGHT	Net:85kg (Gross: Approx. 101kg)
PACKAGE	Carton 1265mm (W) x 830mm (D) x 845mm (H)
ACCESSORIES	-
OPERATING CONDITIONS	Ambient Temperature: 5-43°C Voltage Range: Rated Voltage±6%

- *We reserve the right to make changes in specifications and design without prior notice.
1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 35°C and power supply of 220V 50Hz. The amperage and electric consumption are based on measurements at ambient temperature of 43°C and power supply of 230V 50Hz.
 3. The cabinet temperature range of -6 to 12°C is guaranteed at ambient temperature of 30°C.
 4. Product code: T405-V000

HOSHIZAKI UNDERCOUNTER REFRIGERATOR RTE-128SC-S

APPROVED UEDA	CHECKED KUMASAKI	DESIGNED KAWAKAMI	DRAWN KAWAKAMI	SCALE 1/20	TRIGONOMETRY
UEDA	KAWAKAMI	△	2025.06.20	DATE 2025.03.28	DRAWING NO. D40627
APPROVED	DESIGNED	SYMBOL	DATE		SYMBOL △