
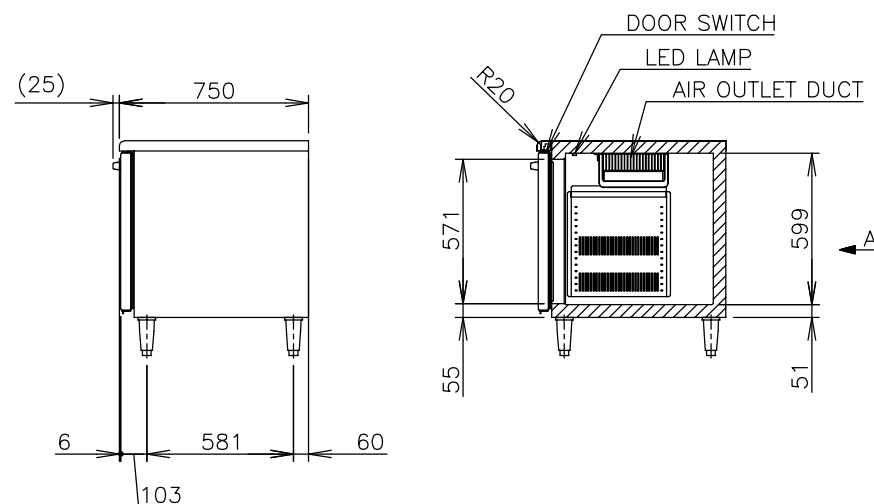
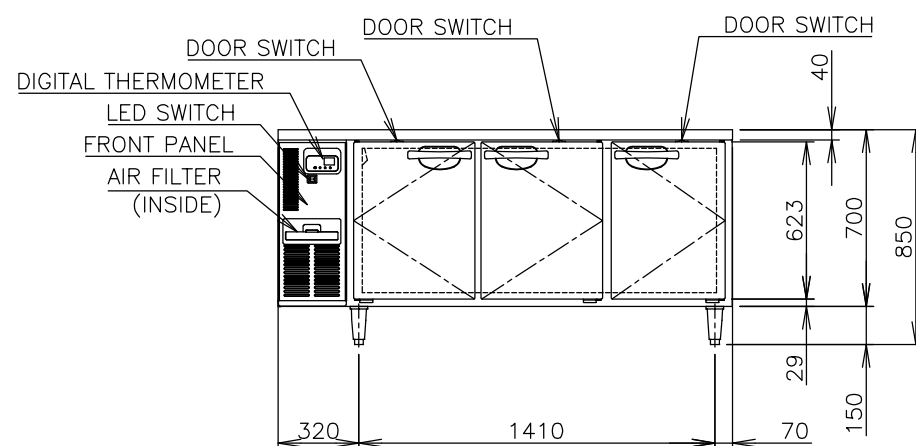
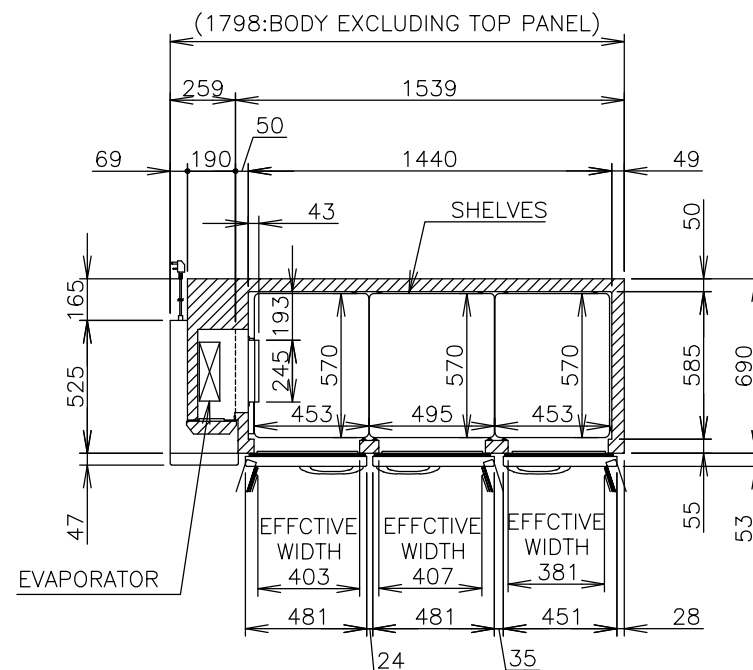


PLUG SHAPE

VIEW A(1/10)

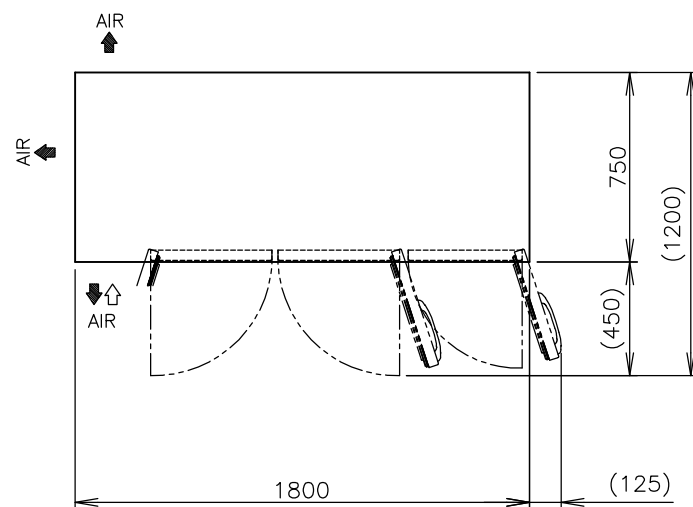

	ITEM	Hoshizaki Undercounter Refrigerator
	MODEL	RTE-188SC-S
	POWER SUPPLY	1 Phase 220-240V~ 50Hz Capacity: 0.48kVA (2.10A)
△	AMPERAGE	Rated 1.4A Starting 1.93A
△	ELECTRIC CONSUMPTION	Motor 109W(Power Factor 38%) Heater 226W Refrigeration 145W Defrost 190W
△	HEAT REJECTION	470W
	POWER CORD	2.0m (Plug with Earth Wire, X-Type connection)
△	EFFECTIVE CAPACITY	371L
	OUTSIDE DIMENSIONS	1800mm (W) x 750mm (D) x 850 (-880)mm (H)
	INSIDE DIMENSIONS	1440mm (W) x 585mm (D) x 599mm (H)
	EXTERIOR	Stainless Steel, Galvanized Steel (Rear / Bottom), PP (Handle on Door)
	INTERIOR	Stainless Steel, ABS Plastic
	INSULATION	Polyurethane Foam
	INSULATION FOAM BLOWING AGENT	Cyclopentane
	REFRIGERATION SYSTEM	Forced Air Circulation
	DEFROST SYSTEM	Glass Tube Heater
	COMPRESSOR	Hermetic, Inverter
	CONDENSER	Fin and Tube type, Air-cooled
	EVAPORATOR	Fin and Tube Type
	REFRIGERANT	R290 / 75g
	TEMPERATURE CONTROL	Microprocessor controlled Adjustable from -6 to 12°C
	DEFROST CONTROL	Microprocessor controlled
	ELECTRIC CIRCUIT PROTECTION	Circuit Breaker, Earth Wire
	COMPRESSOR PROTECTION	Inverter Protector (Auto-reset)
	LEG	Plastic Adjustable 150 to 180mm
	SHELF	6pcs.
	WEIGHT	Net:107kg (Gross: Approx. 131kg)
△	PACKAGE	Carton 1865mm (W) x 830mm (D) x 845mm (H)
	ACCESSORIES	-
	OPERATING CONDITIONS	Ambient Temperature: 5-43°C Voltage Range: Rated Voltage±6%

1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow).
pipe connections).

- ① 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 35°C and power supply of 220V 50Hz. The amperage and electric consumption are based on measurements at ambient temperature of 43°C and power supply of 230V 50Hz.
3. The cabinet temperature range of -6 to 12°C is guaranteed at ambient temperature of 30°C.
4. Product code: T407-V000

APPROVED UEDA		CHECKED KUMASAKI		DESIGNED KAWAKAMI	DRAWN KAWAKAMI	SCALE 1/30	TRIGONOMETRY	
UEDA	KAWAKAMI		2025.06.20	DATE 2025.03.28		DRAWING NO. D40629		SYMBOL 
APPROVED	DESIGNED	SYMBOL	DATE					