
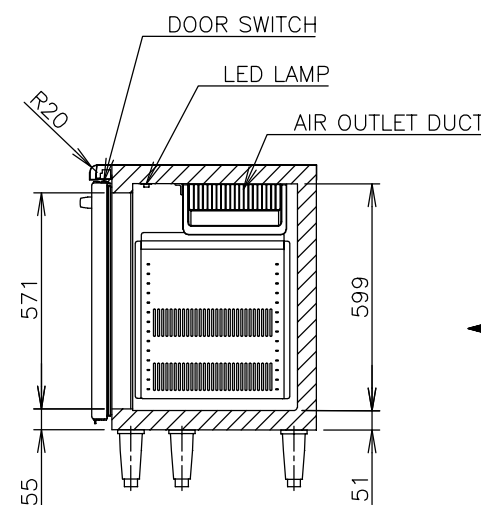
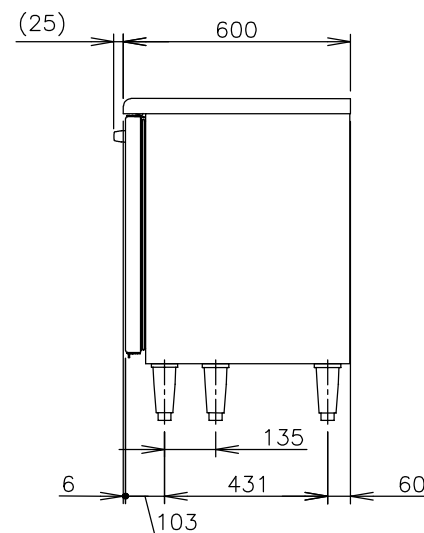


PLUG SHAPE

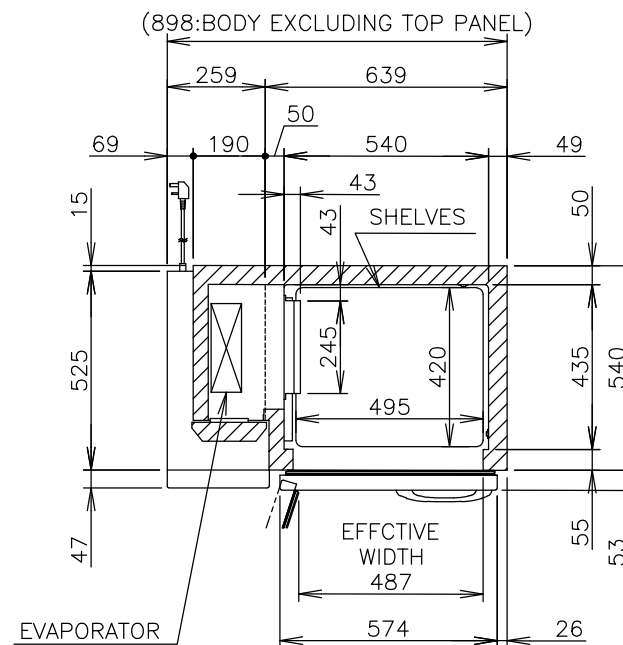

⚠	ITEM	Hoshizaki Undercounter Refrigerator
	MODEL	RTE-96SC-S
	POWER SUPPLY	1 Phase 220-240V~ 50Hz Capacity: 0.42kVA (1.81A)
	AMPERAGE	Rated 1.4A Starting 1.93A
	ELECTRIC CONSUMPTION	Motor 110W(Power Factor 35%) Heater 199W Refrigeration 119W Defrost 190W
	HEAT REJECTION	370W
	POWER CORD	2.0m (Plug with Earth Wire, X-Type connection)
	EFFECTIVE CAPACITY	96L
	OUTSIDE DIMENSIONS	900mm (W) x 600mm (D) x 850 (-880)mm (H)
	INSIDE DIMENSIONS	540mm (W) x 435mm (D) x 599mm (H)
	EXTERIOR	Stainless Steel, Galvanized Steel (Rear / Bottom), PP (Handle on Door)
	INTERIOR	Stainless Steel, ABS Plastic
	INSULATION	Polyurethane Foam
	INSULATION FOAM BLOWING AGENT	Cyclopentane
	REFRIGERATION SYSTEM	Forced Air Circulation
	⚠	DEFROST SYSTEM
COMPRESSOR		Hermetic, Inverter
CONDENSER		Fin and Tube type, Air-cooled
EVAPORATOR		Fin and Tube Type
REFRIGERANT		R290 / 75g
TEMPERATURE CONTROL		Microprocessor controlled Adjustable from -6 to 12°C
DEFROST CONTROL		Microprocessor controlled
ELECTRIC CIRCUIT PROTECTION		Circuit Breaker, Earth Wire
COMPRESSOR PROTECTION		Inverter Protector (Auto-reset)
LEG		Plastic Adjustable 150 to 180mm
⚠	SHELF	2pcs.
	WEIGHT	Net:67kg (Gross: Approx. 79kg)
	PACKAGE	Carton 965mm (W) x 680mm (D) x 845mm (H)
	ACCESSORIES	-
	OPERATING CONDITIONS	Ambient Temperature: 5-43°C Voltage Range: Rated Voltage±6%

1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).

- ⚠ 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 35°C and power supply of 220V 50Hz.
The amperage and electric consumption are based on measurements at ambient temperature of 43°C and power supply of 230V 50Hz.
3. The cabinet temperature range of -6 to 12°C is guaranteed at ambient temperature of 30°C.
4. Product code: T400-V000

APPROVED UEDA		CHECKED KUMASAKI	DESIGNED KAWAKAMI	DRAWN KAWAKAMI	SCALE 1/20	TRIGONOMETRY	
UEDA	KAWAKAMI		2025.06.20	DATE 2025.03.28		DRAWING NO. D40622	SYMBOL 
APPROVED	DESIGNED	SYMBOL	DATE				