
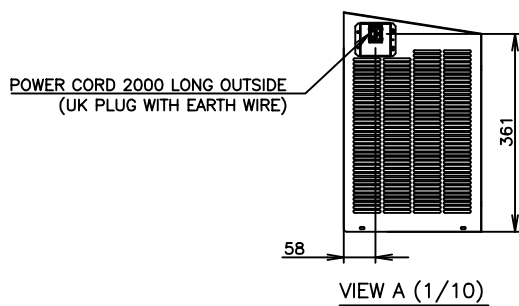
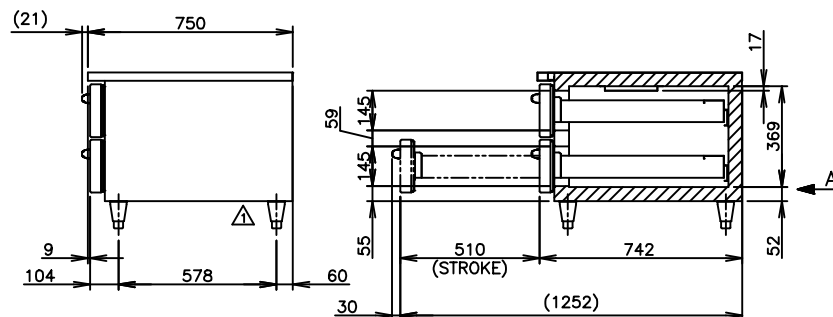
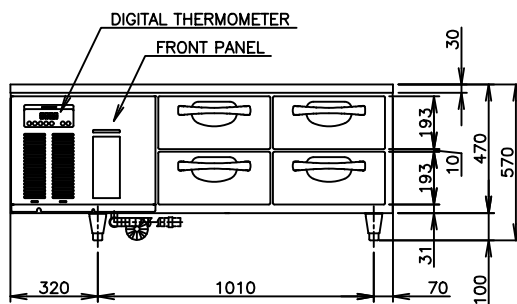
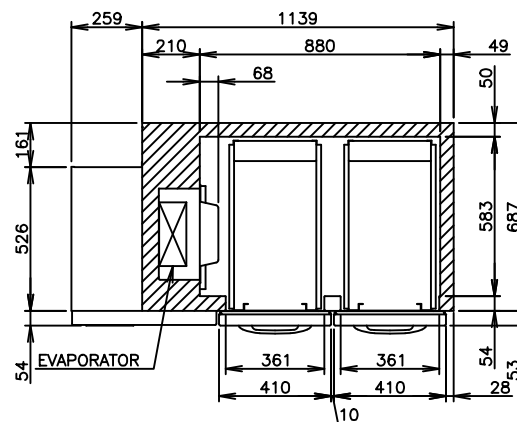


SINGAPORE PLUG

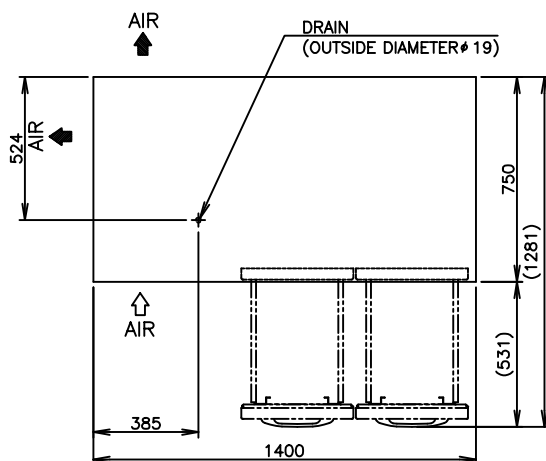

ITEM	Hoshizaki Drawer Type Undercounter Refrigerator
MODEL	RTL-148MC-S-4D
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.43kVA(1.86A)
AMPERAGE	Rated: 1.0A
ELECTRIC CONSUMPTION	Motor 160W(Power Factor 96%) Heater 215W Refrigeration 185W Defrost 190W
HEAT REJECTION	577W
POWER CORD	2.0m (UK Plug with Earth Wire)
EFFECTIVE CAPACITY	Net:90L/Gross:191L (Based on ISO 22041-2019)
ENERGY CONSUMPTION	2.01kWh/day (Based on ISO 22041-2019)
OUTSIDE DIMENSIONS	1400mm(W) x 750mm(D) x 570 (560-590) mm (H)
INSIDE DIMENSIONS	880mm(W) x 583mm(D) x 369mm(H)
EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom) Stainless Steel (Door, Front Panel)
INTERIOR	Stainless Steel
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
DEFROST SYSTEM	Heater
COMPRESSOR	Hermetic
CONDENSER	Fin and Tube type, Air-cooled
EVAPORATOR	Fin and Tube Type
REFRIGERANT	R290
TEMPERATURE CONTROL	Microprocessor (Digital Temp Indication) Adjustable from -6 to 12°C
DEFROST CONTROL	Microprocessor
ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire
REFRIGERANT CIRCUIT PROTECTION	Motor Protector
LEG	Plastic Adjustable 90 to 120mm
WEIGHT	95kg (Gross Approx. 100kg)
PACKAGE	Carton 1465mm(W)x830mm(D)x560mm(H)
ACCESSORIES	Drain Hose x1
OPERATING CONDITIONS	Ambient Temperature: 5-38°C Voltage Range: Rated Voltage $\pm$ 6%

*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 35°C and power supply of 230V 50Hz. The ampere and electric consumption are based on measurements at ambient temperature of 38°C and power supply of 230V 50Hz.
3. The cabinet temperature range of -6 to 12°C is guaranteed at ambient temperature of 30°C.
4. Product code: T472-V000 (For Singapore)