



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001

IM-130A

Cube Ice Maker



Key Features



Hard and Crystal-Clear Ice



Perfect Taste



Perfect Shape



Perfect Dilution



Easy for maintenance


Our is perfectly symmetrical and leaves a good impression with its hard, crystal clear quality that melts very slowly; allowing customers to enjoy their favourite drink longer. The IM series allows more flexibility of application with each range offering ice in variable sizes along side a design for uncomplicated usage from start to finish.

Our is produced by spraying water into an ice-making chamber cooled to -25°C . As freezes gradually, effectively eliminating nearly 100% of impurities.

A fully closed water circuit ensures maximum protection against any form of contamination.



Dimensions & Specifications

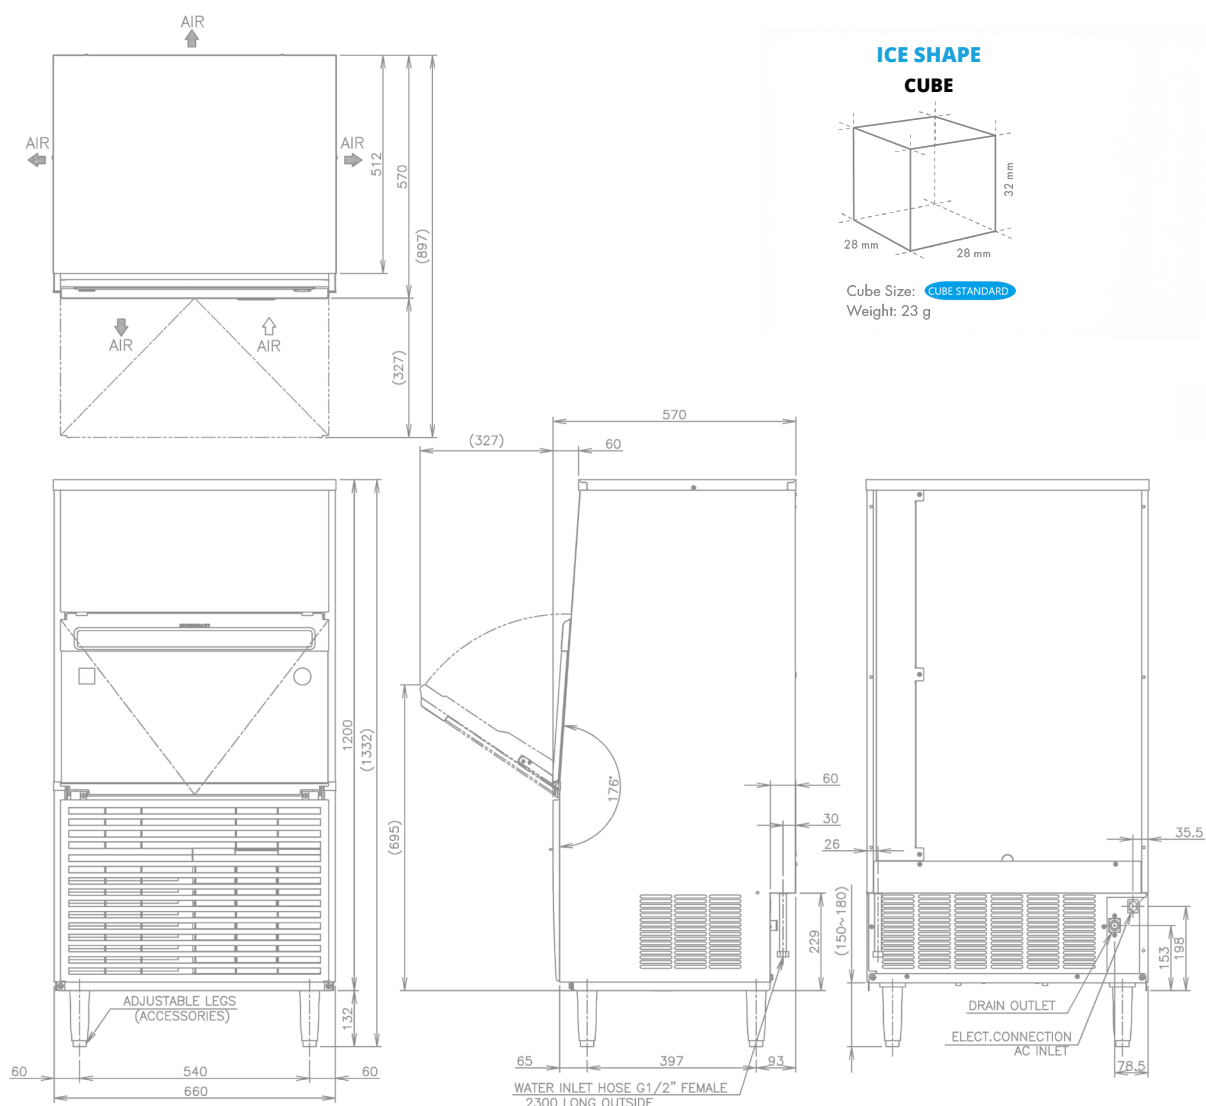

MODEL		IM-130A
ICE SHAPE		Cube Ice (28 x 28 x 32mm / 23g)
POWER SUPPLY		1 Phase 220-240V 50Hz, Capacity Min: 1.40kVA (5.8A)
AMPERAGE		4.3A, Starting 18.6A
ELECTRIC CONSUMPTION		660W
HEAT REJECTION		(AT32°C / WT21°C) 1555W
ICE PRODUCTION PER 24H	(AT10°C / WT10°C)	126kg
	(AT21°C / WT15°C)	125kg
	(AT32°C / WT21°C)	100kg
STORAGE CAPACITY		Approx. 52kg
WATER CONSUMPTION PER 24H		(AT32°C / WT21°C) 190L
REFRIGERANT		R404A/450g
OUTSIDE DIMENSIONS		660mm(W) x 570mm(D) x 1200mm(H)
PACKAGE		Carton 760mm(W) x 680mm(D) x 1379mm(H)
WEIGHT		Net weight 79kg / Gross
OPERATING CONDITIONS		Ambient Temp.:1-40°C, Water Supply Temp.:5-35°C, Water Supply Pressure: 0.07-0.78MPa (0.7-8bar), Voltage Range: Rated Voltage±6%



HOSHIZAKI

HOSHIZAKI MALAYSIA SDN. BHD.

No. 12, Jalan Penyajak U1/45B. Hicom-Glenmarie
Industrial Park, 40150 Shah Alam, Selangor
TEL (+60) 3 5569 8023 <https://hoshizaki.com.my/>

