



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001

IM-240DNS-STCR

Cube Ice Maker




Key Features



Hard and Crystal-Clear Ice



Perfect Taste



Perfect Shape



Perfect Dilution



Tropical Conditions


Cube ice is perfectly symmetrical and leaves a good impression with its hard, crystal clear quality that melts very slowly; allowing customers to enjoy their favourite drink longer. The IM series allows more flexibility of application with each range offering ice in variable sizes alongside a design for uncomplicated usage from start to finish.

Our ice is produced by spraying water into an ice-making chamber cooled to -25°C. As it freezes gradually, effectively eliminating nearly 100% of impurities.

A fully closed water circuit ensures maximum protection against any form of contamination.




Dimensions & Specifications

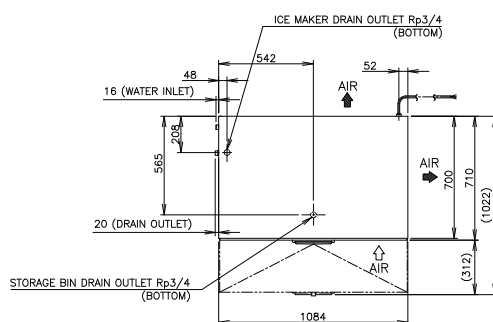


ICE SHAPE

CUBE



Cube Size: **CUBE STANDARD**

Weight: 23 g

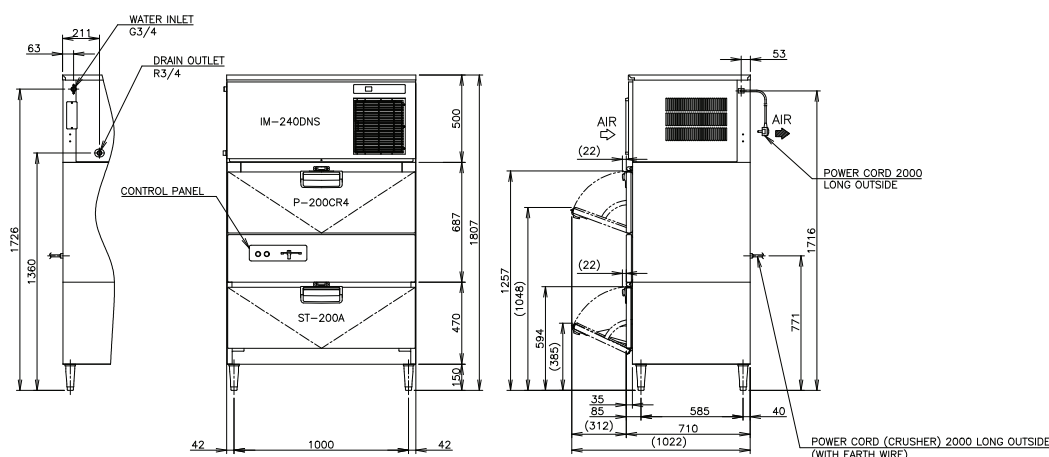

MODEL		IM-240DNS-STCR	
ICE SHAPE		Cube Ice (28 x 28 x 32mm / 23g)	
POWER SUPPLY		IM-240DNS: 1 Phase 220-240V 50Hz Capacity, 2.3kVA (9.6A) P-200CR4: 3 Phase 200V 50/60Hz, 1kVA (2.9A)	
AMPERAGE		IM-240DNS: 6.6A, Starting: 35A P-200CR4: 1.1 / 1.0A	
ELECTRIC CONSUMPTION		IM-240DNS: 1330W, P-200CR4: 258 / 253W	
HEAT REJECTION	(AT32°C / WT21°C)	2870W	
ICE PRODUCTION PER 24H	(AT10°C / WT10°C)	240kg	
	(AT21°C / WT15°C)	220kg	
	(AT32°C / WT21°C)	190kg	
STORAGE CAPACITY		P-200CR4 (Cube): Approx. 160kg ST-200A (Crushed): Approx. 135kg	
WATER CONSUMPTION PER 24H	(AT32°C / WT21°C)	420L	
REFRIGERANT		R404A/480g	
OUTSIDE DIMENSIONS		1084mm(W) x 710mm(D) x 1807(-1837)mm(H)	
PACKAGE	ICE MAKER	IM-240DNS: Carton 1196mm(W) x 825mm(D) x 640mm(H)	
	CRUISHER	P-200CR4: Carton 1185mm(W) x 870mm(D) x 874mm(H)	
	STORAGE BIN	ST-200A: Carton 1176mm(W) x 786mm(D) x 504mm(H)	
WEIGHT	ICE MAKER	IM-240DNS: Net weight 88kg / Gross weight 101kg	
	CRUISHER	P-200CR4: Net weight 65kg / Gross weight 77kg	
	STORAGE BIN	ST-200A: Net weight 33kg / Gross weight 41kg	
OPERATING CONDITIONS		IM-240DNS Ambient Temp: 1 - 40°C, Water Supply Temp: 5-35°C, Water Supply Pressure: 0.07-0.8MPa (0.7-8bar), Voltage Range: Rated Voltage±6%, P-200CR4 Voltage Range: Rated Voltage±10%	
AVAILABLE ON BINS		ST-200A	



HOSHIZAKI

HOSHIZAKI MALAYSIA SDN. BHD.

No. 12, Jalan Penyajak U1/45B. Hicom-Glenmarie
Industrial Park, 40150 Shah Alam, Selangor
TEL (+60) 3 5569 8023 <https://hoshizaki.com.my/>

