



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001

IM-240DNS-STCR

Cube Ice Maker



Key Features



Hard and Crystal-Clear Ice



Perfect Taste



Perfect Shape



Perfect Dilution



Tropical Conditions


Cube ice is perfectly symmetrical and leaves a good impression with its hard, crystal clear quality that melts very slowly; allowing customers to enjoy their favourite drink longer. The IM series allows more flexibility of application with each range offering ice in variable sizes alongside a design for uncomplicated usage from start to finish.

Our ice is produced by spraying water into an ice-making chamber cooled to -25°C. As it freezes gradually, effectively eliminating nearly 100% of impurities.

A fully closed water circuit ensures maximum protection against any form of contamination.




Dimensions & Specifications

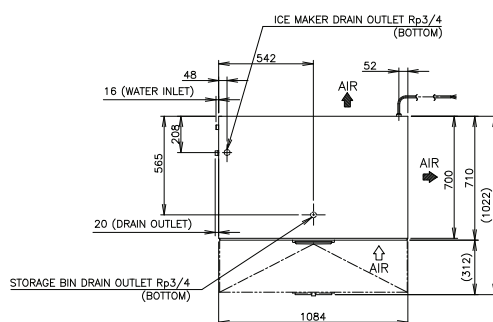


ICE SHAPE

CUBE



Cube Size: **CUBE STANDARD**

Weight: 23 g

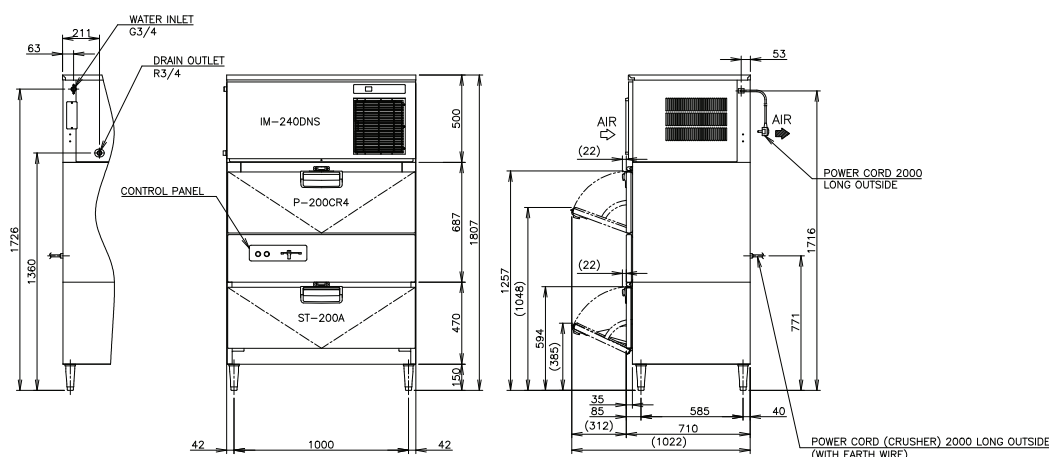

MODEL		IM-240DNS-STCR	
ICE SHAPE		Cube Ice (28 x 28 x 32mm / 23g)	
POWER SUPPLY		IM-240DNS: 1 Phase 220-240V 50Hz Capacity, 2.3kVA (9.6A) P-200CR4: 3 Phase 200V 50/60Hz, 1kVA (2.9A)	
AMPERAGE		IM-240DNS: 6.6A, Starting: 35A P-200CR4: 1.1 / 1.0A	
ELECTRIC CONSUMPTION		IM-240DNS: 1330W, P-200CR4: 258 / 253W	
HEAT REJECTION	(AT32°C / WT21°C)	2870W	
ICE PRODUCTION PER 24H	(AT10°C / WT10°C)	240kg	
	(AT21°C / WT15°C)	220kg	
	(AT32°C / WT21°C)	190kg	
STORAGE CAPACITY		P-200CR4 (Cube): Approx. 160kg ST-200A (Crushed): Approx. 135kg	
WATER CONSUMPTION PER 24H	(AT32°C / WT21°C)	420L	
REFRIGERANT		R404A/480g	
OUTSIDE DIMENSIONS		1084mm(W) x 710mm(D) x 1807(-1837)mm(H)	
PACKAGE	ICE MAKER	IM-240DNS: Carton 1196mm(W) x 825mm(D) x 640mm(H)	
	CRUISHER	P-200CR4: Carton 1185mm(W) x 870mm(D) x 874mm(H)	
	STORAGE BIN	ST-200A: Carton 1176mm(W) x 786mm(D) x 504mm(H)	
WEIGHT	ICE MAKER	IM-240DNS: Net weight 88kg / Gross weight 101kg	
	CRUISHER	P-200CR4: Net weight 65kg / Gross weight 77kg	
	STORAGE BIN	ST-200A: Net weight 33kg / Gross weight 41kg	
OPERATING CONDITIONS		IM-240DNS Ambient Temp: 1 - 40°C, Water Supply Temp: 5-35°C, Water Supply Pressure: 0.07-0.8MPa (0.7-8bar), Voltage Range: Rated Voltage±6%, P-200CR4 Voltage Range: Rated Voltage±10%	
AVAILABLE ON BINS		ST-200A	



HOSHIZAKI

HOSHIZAKI (THAILAND) LIMITED

No. 99 CP Tower North Park building 9th Floor, Zone D1 Soi Ngamwongwan 47 Intersection 42, Thung Song Hong Subdistrict, Lak Si District, Bangkok 10210 Thailand
TEL +66 2 005 9980 FAX +66 2 516 2646
<https://hoshizaki-sea.com/>

