



# HOSHIZAKI

## CERTIFICATION



HACCP International



ISO9001

## IM-45CNS

### Cube Ice Maker



## Key Features



**Hard and Crystal-Clear Ice**



**Perfect Taste**



**Perfect Shape**



**Perfect Dilution**



**Easy for maintenance**


Our is perfectly symmetrical and leaves a good impression with its hard, crystal clear quality that melts very slowly; allowing customers to enjoy their favourite drink longer. The IM series allows more flexibility of application with each range offering ice in variable sizes along side a design for uncomplicated usage from start to finish.

Our is produced by spraying water into an ice-making chamber cooled to  $-25^{\circ}\text{C}$ . As freezes gradually, effectively eliminating nearly 100% of impurities.


A fully closed water circuit ensures maximum protection against any form of contamination.






# Dimensions & Specifications

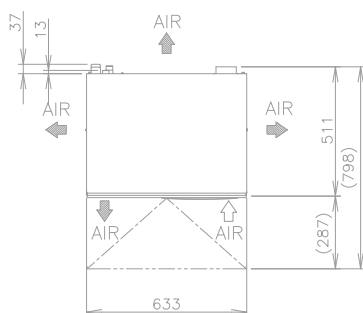

## ICE SHAPE CUBE



Cube Size: **CUBE STANDARD**  
Weight: 23 g

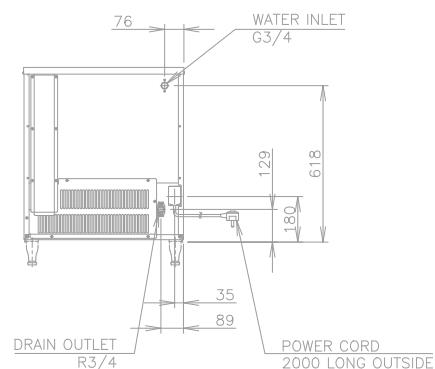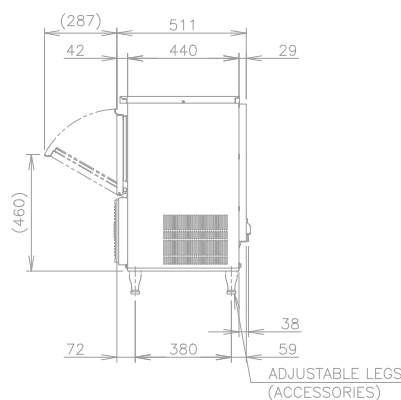

| MODEL                     |                   | IM-45CNS                                                                                                                                 |
|---------------------------|-------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| ICE SHAPE                 |                   | Cube Ice (28 x 28 x 32mm / 23g)                                                                                                          |
| POWER SUPPLY              |                   | 1 Phase 220-240V 50Hz, Capacity Min: 0.86kVA (3.6A)                                                                                      |
| AMPERAGE                  |                   | 2.4A, Starting: 13A                                                                                                                      |
| ELECTRIC CONSUMPTION      |                   | 320W                                                                                                                                     |
| HEAT REJECTION            |                   | 640W                                                                                                                                     |
| ICE PRODUCTION PER 24H    | (AT32°C / WT21°C) | 44kg                                                                                                                                     |
|                           | (AT10°C / WT10°C) | 40kg                                                                                                                                     |
|                           | (AT21°C / WT15°C) | 32kg                                                                                                                                     |
|                           | (AT32°C / WT21°C) | 32kg                                                                                                                                     |
| STORAGE CAPACITY          |                   | Approx. 15kg                                                                                                                             |
| WATER CONSUMPTION PER 24H |                   | 90L                                                                                                                                      |
| REFRIGERANT               |                   | R134a/160g                                                                                                                               |
| OUTSIDE DIMENSIONS        |                   | 633mm (W) x 511mm (D) x 690mm (H)                                                                                                        |
| PACKAGE                   |                   | Carton 735mm (W) x 570mm (D) x 864mm                                                                                                     |
| WEIGHT                    |                   | Net weight 48kg / Gross                                                                                                                  |
| OPERATING CONDITIONS      |                   | Ambient Temp: 1 - 40°C, Water Supply Temp: 5-35°C,<br>Water Supply Pressure: 0.07-0.8MPa (0.7-8bar), Voltage<br>Range: Rated Voltage±10% |



# HOSHIZAKI

## HOSHIZAKI VIETNAM CORPORATION

168/14 Nguyen Gia Tri, Thanh My Tay Ward, Ho Chi Minh City  
Vietnam 760000

TEL +84 0 916 161 346 <https://hoshizaki-sea.com/>

