



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001

IM-480DNS-STCR

Cube Ice Maker with Crusher



Key Features



Hard and Crystal-Clear Ice



Perfect Taste



Perfect Shape



Perfect Dilution



Tropical Conditions


Cube ice is perfectly symmetrical and leaves a good impression with its hard, crystal clear quality that melts very slowly; allowing customers to enjoy their favourite drink longer. The IM series allows more flexibility of application with each range offering ice in variable sizes alongside a design for uncomplicated usage from start to finish.

Our is produced by spraying water into an ice-making chamber cooled to -25°C . As freezes gradually, effectively eliminating nearly 100% of impurities.

A fully closed water circuit ensures maximum protection against any form of contamination.



Dimensions & Specifications

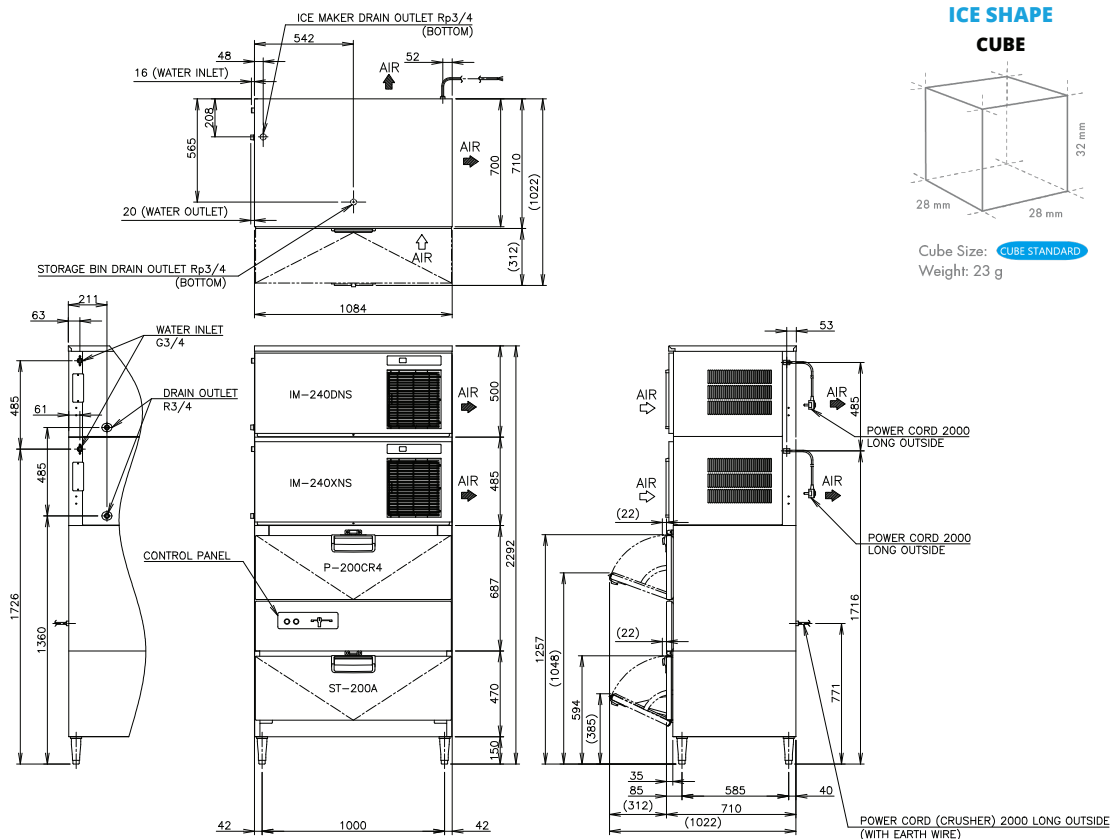

MODEL		IM-480DNS-STCR	
ICE SHAPE		Cube Ice (28 x 28 x 32mm / 23g)	
POWER SUPPLY		IM-240DNS,XNS: 1 Phase 220-240V 50Hz Capacity: 2.3kVA x 2 (9.6A x 2) P-200CR4: 3 Phase 200V 50/60Hz, 1kVA (2.9A)	
AMPERAGE		IM-240DNS, XNS: 6.6A x 2, Starting 35A x 2 P-200CR4: 1.1 / 1.0A	
ELECTRIC CONSUMPTION		IM-240DNS, XNS: 1330W x 2, P-200CR4: 258 / 253W	
HEAT REJECTION	(AT32°C / WT21°C)	5740W	
ICE PRODUCTION PER 24H	(AT10°C / WT10°C)	480kg	
	(AT21°C / WT15°C)	440kg	
	(AT32°C / WT21°C)	380kg	
STORAGE CAPACITY		P-200CR4 (Cube): Approx. 160kg ST-200A (Crushed): Approx. 135kg	
WATER CONSUMPTION PER 24H	(AT32°C / WT21°C)	840L	
REFRIGERANT		R404A/480g x 2	
OUTSIDE DIMENSIONS		1084mm(W) x 710mm(D) x 2292(-2322)mm(H)	
PACKAGE	ICE MAKER D-TYPE	IM-240DNS: Carton 1196mm(W) x 825mm(D) x 640mm(H)	
	ICE MAKER X-TYPE	IM-240XNS: Carton 1196mm(W) x 825mm(D) x 640mm(H)	
	CRUISHER	P-200CR4: Carton 1185mm(W) x 870mm(D) x 874mm(H)	
	STORAGE BIN	ST-200A: Carton 1176mm(W) x 786mm(D) x 504mm(H)	
WEIGHT	ICE MAKER D-TYPE	IM-240DNS: Net weight 88kg / Gross weight 101kg	
	ICE MAKER X-TYPE	IM-240XNS: Net weight 84kg / Gross weight 98kg	
	CRUISHER	P-200CR4: Net weight 65kg / Gross weight 77kg	
	STORAGE BIN	ST-200A: Net weight 33kg / Gross weight 41kg	
OPERATING CONDITIONS		IM-240DNS, XNS Ambient Temp: 1 - 40°C, Water Supply Temp: 5-35°C, Water Supply Pressure: 0.07-0.8MPa (0.7-8bar), Voltage Range: Rated Voltage±6%, P-200CR4 Voltage Range: Rated Voltage±10%	
AVAILABLE ON BINS		ST-200A	



HOSHIZAKI

HOSHIZAKI (THAILAND) LIMITED

No. 99 CP Tower North Park building 9th Floor, Zone D1 Soi
Ngamwongwan 47 Intersection 42, Thung Song Hong
Subdistrict, Lak Si District, Bangkok 10210 Thailand
TEL +66 2 005 9980 FAX +66 2 516 2646
<https://hoshizaki-sea.com/>

