



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001

IM-480DNS-STCRN

Cube Ice Maker with Crusher



Key Features



Hard and Crystal-Clear Ice



Perfect Taste



Perfect Shape



Perfect Dilution



Tropical Conditions


Cube ice is perfectly symmetrical and leaves a good impression with its hard, crystal clear quality that melts very slowly; allowing customers to enjoy their favourite drink longer. The IM series allows more flexibility of application with each range offering ice in variable sizes alongside a design for uncomplicated usage from start to finish.

Our is produced by spraying water into an ice-making chamber cooled to -25°C. As freezes gradually, effectively eliminating nearly 100% of impurities.

A fully closed water circuit ensures maximum protection against any form of contamination.



Dimensions & Specifications

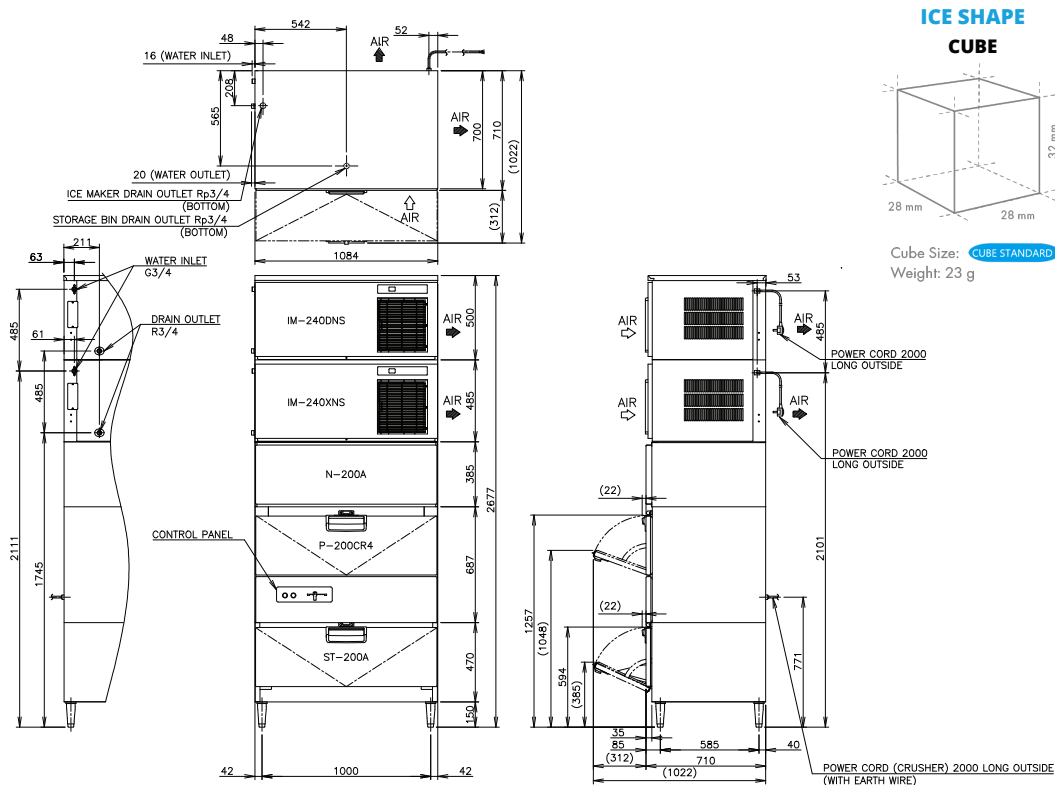

MODEL		IM-480DNS-STCRN
ICE SHAPE		Cube Ice (28 x 28 x 32mm / 23g)
POWER SUPPLY		IM-240DNS,XNS: 1 Phase 220-240V 50Hz Capacity: 2.3kVA x 2 (9.6A x 2) P-200CR4: 3 Phase 200V 50/60Hz, 1kVA (2.9A)
AMPERAGE		IM-240DNS, XNS: 6.6A x 2, Starting: 35A x 2 P-200CR4: 1.1 / 1.0A
ELECTRIC CONSUMPTION		IM-240DNS, XNS: 1330W x 2, P-200CR4: 258 / 253W
HEAT REJECTION	(AT32°C / WT21°C)	5740W
ICE PRODUCTION PER 24H	(AT10°C / WT10°C)	480kg
	(AT21°C / WT15°C)	440kg
	(AT32°C / WT21°C)	380kg
STORAGE CAPACITY		P-200CR4 (Cube) : Approx. 255kg, ST-200A (Crushed): Approx. 135kg
WATER CONSUMPTION PER 24H	(AT32°C / WT21°C)	840L
REFRIGERANT		R404A/480g x 2
OUTSIDE DIMENSIONS		1084mm(W) x 710mm(D) x 2677(-2707)mm(H)
PACKAGE	ICE MAKER D-TYPE	IM-240DNS: Carton 1196mm(W) x 825mm(D) x 640mm(H)
	ICE MAKER X-TYPE	IM-240XNS: Carton 1196mm(W) x 825mm(D) x 640mm(H)
	SLEEVE	N-200A: Carton 1160mm(W) x 750mm(D) x 410mm(H)
	CRUISHER	P-200CR4: Carton 1185mm(W) x 870mm(D) x 874mm(H)
	STORAGE BIN	ST-200A: Carton 1176mm(W) x 786mm(D) x 504mm(H)
WEIGHT	ICE MAKER D-TYPE	IM-240DNS: Net weight 88kg / Gross weight 101kg
	ICE MAKER X-TYPE	IM-240XNS: Net weight 84kg / Gross weight 98kg
	SLEEVE	N-200A: Net weight 24kg / Gross weight 30kg
	CRUISHER	P-200CR4: Net weight 65kg / Gross weight 77kg
	STORAGE BIN	ST-200A: Net weight 33kg / Gross weight 41kg
OPERATING CONDITIONS		IM-240DNS, XNS Ambient Temp: 1 - 40°C, Water Supply Temp: 5-35°C, Water Supply Pressure: 0.07-0.8MPa (0.7-8bar), Voltage Range: Rated Voltage±6%, P-200CR4 Voltage Range: Rated Voltage±10%
AVAILABLE ON BINS		ST-200A



HOSHIZAKI

HOSHIZAKI MALAYSIA SDN. BHD.

No. 12, Jalan Penyajak U1/45B. Hicom-Glenmarie
Industrial Park, 40150 Shah Alam, Selangor
TEL (+60) 3 5569 8023 <https://hoshizaki.com.my/>

