



# HOSHIZAKI

## CERTIFICATION



HACCP International



ISO9001

## IM-65NS-LM

### Big Ice Maker



### Key Features



**Hard and Crystal-Clear Ice**



**Perfect Taste**



**Perfect Shape**



**Perfect Dilution**



**Easy for maintenance**


Our is perfectly symmetrical and leaves a good impression with its hard, crystal clear quality that melts very slowly; allowing customers to enjoy their favourite drink longer. The IM series allows more flexibility of application with each range offering ice in variable sizes along side a design for uncomplicated usage from start to finish.

Our is produced by spraying water into an ice-making chamber cooled to -25°C. As freezes gradually, effectively eliminating nearly 100% of impurities.

A fully closed water circuit ensures maximum protection against any form of contamination.



# Dimensions & Specifications

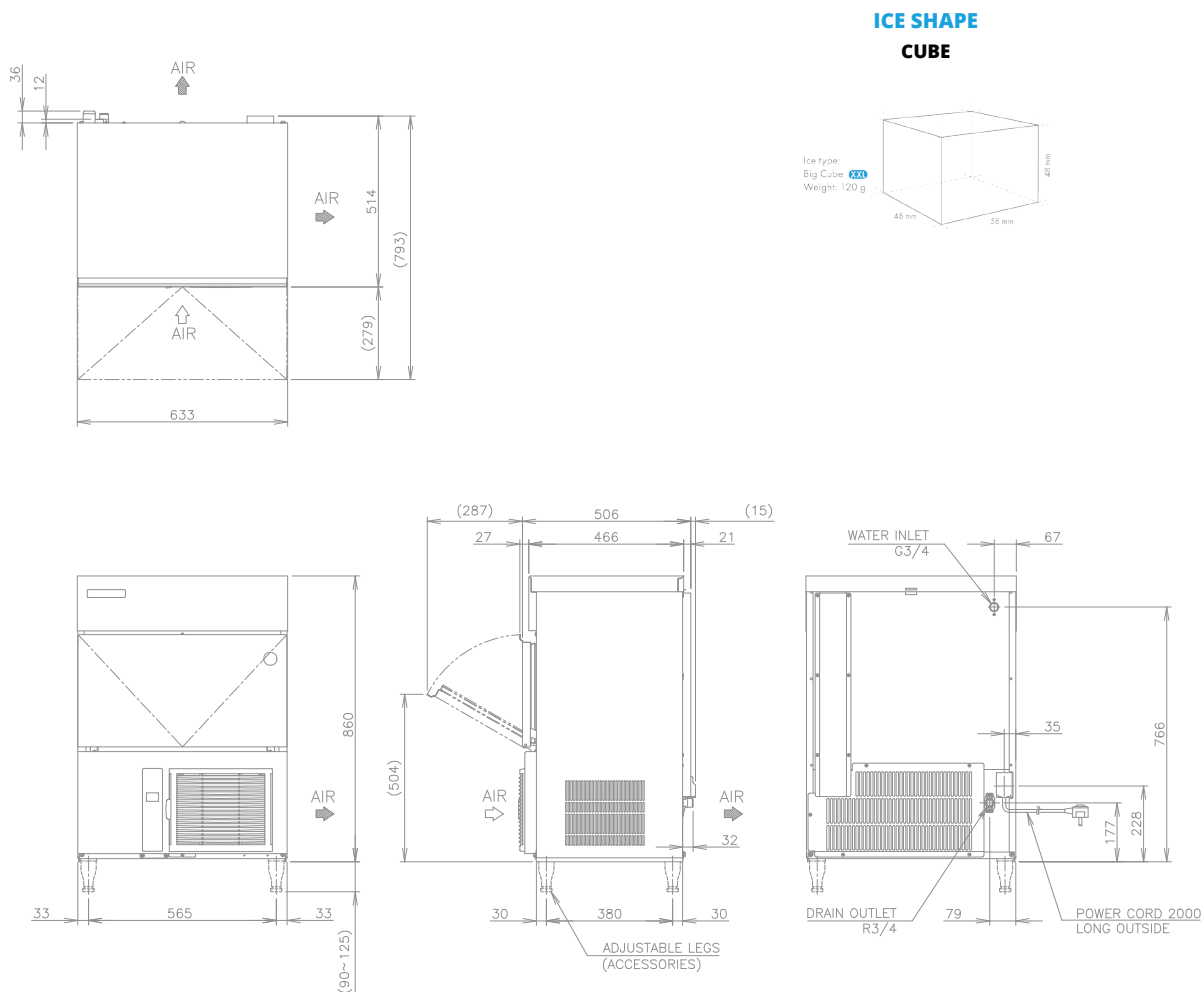

| MODEL                     |                   | IM-65NS-LM                                                                                                                              |
|---------------------------|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| ICE SHAPE                 |                   | Big Cube Ice (48 x 48 x 58mm / 120g)                                                                                                    |
| POWER SUPPLY              |                   | 1 Phase 220-240V 50Hz, Capacity: 0.99kVA (4.2A)                                                                                         |
| AMPERAGE                  |                   | 2.5A, Starting: 15A                                                                                                                     |
| ELECTRIC CONSUMPTION      |                   | 400W                                                                                                                                    |
| HEAT REJECTION            |                   | 800W                                                                                                                                    |
| ICE PRODUCTION PER 24H    | (AT32°C / WT21°C) | 40kg                                                                                                                                    |
|                           | (AT10°C / WT10°C) | 33kg                                                                                                                                    |
|                           | (AT21°C / WT15°C) | 25kg                                                                                                                                    |
|                           | (AT32°C / WT21°C) | 25kg                                                                                                                                    |
| STORAGE CAPACITY          |                   | Approx. 26kg                                                                                                                            |
| WATER CONSUMPTION PER 24H |                   | 60L                                                                                                                                     |
| REFRIGERANT               |                   | R134a/230g                                                                                                                              |
| OUTSIDE DIMENSIONS        |                   | 633mm(W) x 506mm(D) x 860mm(H)                                                                                                          |
| PACKAGE                   |                   | Carton 735mm(W) x 570mm(D) x 1012mm(H)                                                                                                  |
| WEIGHT                    |                   | Net weight 53kg / Gross                                                                                                                 |
| OPERATING CONDITIONS      |                   | Ambient Temp.: 1-40°C, Water Supply Temp.: 5-35°C,<br>Water Supply Pressure: 0.07-0.8MPa (0.7-8bar), Voltage<br>Range: Rated Voltage±6% |



# HOSHIZAKI

**HOSHIZAKI VIETNAM CORPORATION**

168/14 Nguyen Gia Tri, Thanh My Tay Ward, Ho Chi Minh City

Vietnam 760000

TEL +84 0 916 161 346 <https://hoshizaki-sea.com/>

