



# HOSHIZAKI

## CERTIFICATION



HACCP International



Compliant with  
IEC60335-2-89 Standard


## HR-76MC-S UPRIGHT REFRIGERATOR




### Key Features



Lower running cost



Powerful cooling  
performance




Self Closing Door



Removal door gaskets



Food Guard Shelf



Round Interior Corners



Large and clear display









Drainage-Free Design



LED lighting



## Dimensions & Specifications

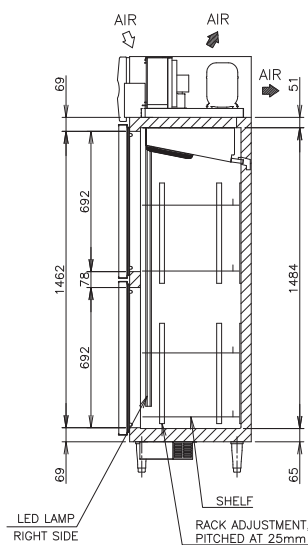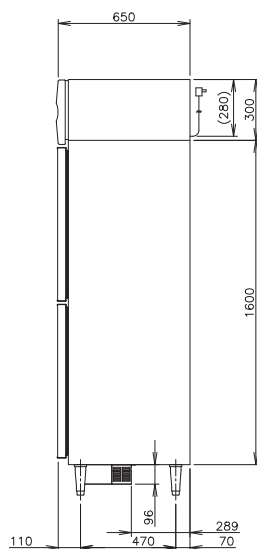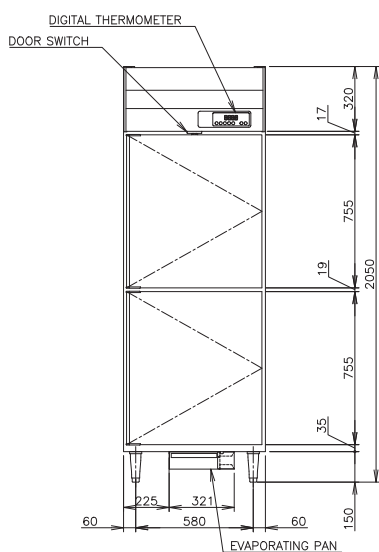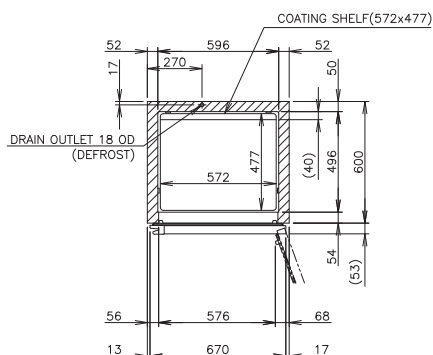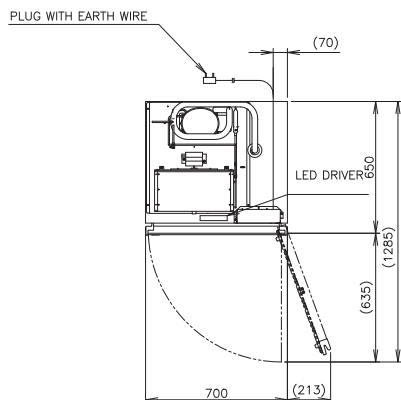

| MODEL                | HR-76MC-S                                                       |
|----------------------|-----------------------------------------------------------------|
| POWER SUPPLY         | 1 Phase 220-240V 50Hz Capacity: 0.63kVA (2.90A)                 |
| ELECTRIC CONSUMPTION | 416W                                                            |
| TEMPERATURE CONTROL  | -6 to 12°C                                                      |
| STORAGE CAPACITY     | 440L                                                            |
| WEIGHT               | null                                                            |
| OUTSIDE DIMENSIONS   | 700mm(W)× 650mm(D)×2050(-2080)mm(H)                             |
| PACKAGE              | Carton(Wooden Pallet): 760mm(W)×750mm(D)×2075mm(H)              |
| NUMBER OF SHELVES    | 4                                                               |
| REFRIGERANT          | R290                                                            |
| OPERATING CONDITIONS | Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6% |



# HOSHIZAKI

**HOSHIZAKI MALAYSIA SDN. BHD.**

No. 12, Jalan Penyajak U1/45B. Hicom-Glenmarie  
Industrial Park, 40150 Shah Alam, Selangor

TEL (+60) 3 5569 8023 <https://hoshizaki.com.my/>

