



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001



Compliant with
IEC60335-2-89 Standard

HR-78MC-P UPRIGHT REFRIGERATOR



Key Features



Lower running cost



Powerful cooling
performance




Self Closing Door



Removal door gaskets



Food Guard Shelf



Round Interior Corners



Large and clear display




Drainage-Free Design



LED lighting



Dimensions & Specifications

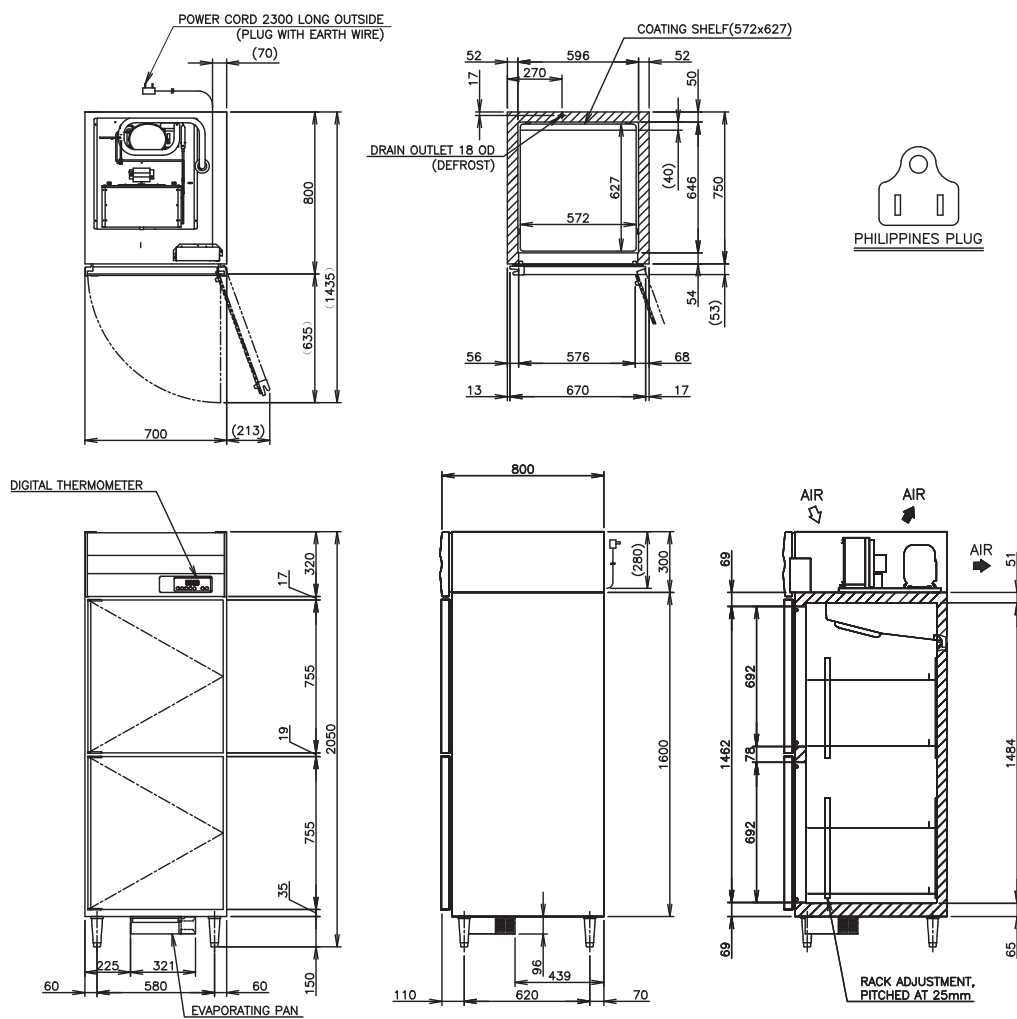

MODEL	HR-78MC-P
POWER SUPPLY	1 Phase 230V 60Hz Capacity: 0.96kVA (4.20A)
ELECTRIC CONSUMPTION	426W
TEMPERATURE CONTROL	-6 to 12°C
STORAGE CAPACITY	567L
WEIGHT	Net:103kg (Gross:Approx.125kg)
OUTSIDE DIMENSIONS	700mm(W)× 800mm(D)×2050(-2080)mm(H)
PACKAGE	Carton(Wooden Pallet): 760mm(W)×900mm(D)×2075mm(H)
NUMBER OF SHELVES	4pcs
REFRIGERANT	R290
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI

HOSHIZAKI PHILIPPINES CORPORATION

Unit No. GB-2, G/F Agustin 1 Bldg., # 28 F. Ortigas Center, Pasig City,
Philippines 1605

TEL +632 8839 2861 <https://hoshizaki-sea.com/>

