



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001

HRV-128A UPRIGHT REFRIGERATOR




Key Features



Powerful cooling
performance



Cleaning-Free Condenser




Self Closing Door



Removal door gaskets



Food Guard Shelf



Round Interior Corners



LED lighting




Drainage-Free Design



Ergonomic Door Design



Dimensions & Specifications

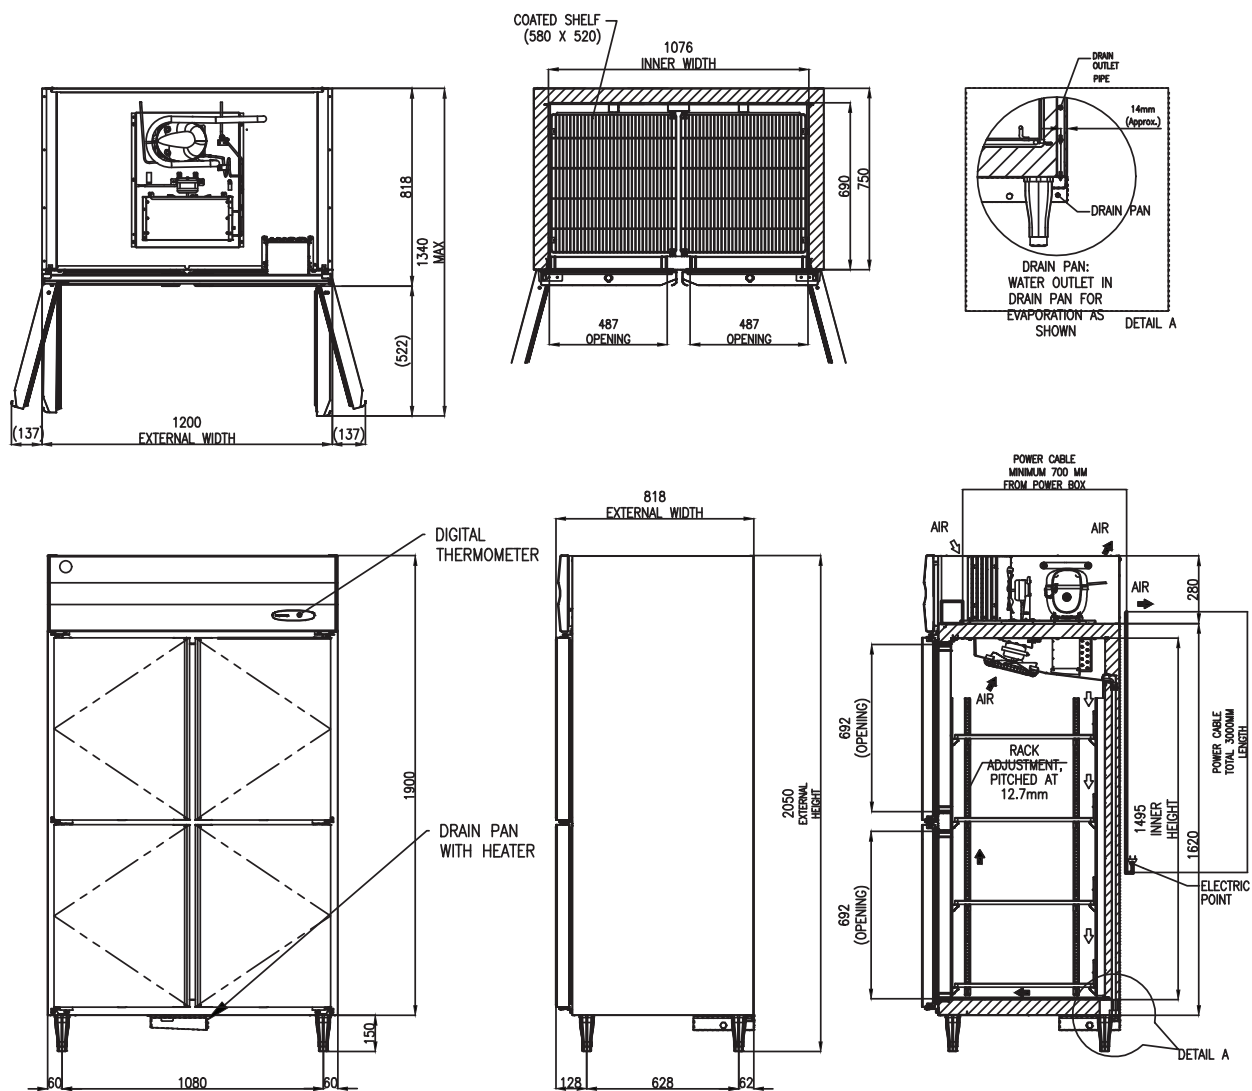

MODEL	HRV-128A
POWER SUPPLY	Single phase 220V-240V AC, 50Hz, 3.8A
ELECTRIC CONSUMPTION	760 W
TEMPERATURE CONTROL	-2 to 12°C
STORAGE CAPACITY	1020L
WEIGHT	Net: 165kg (Gross: Approx. 192kg)
OUTSIDE DIMENSIONS	1200mm(W)× 818mm(D)×2050(H - with 150mm Leg)
PACKAGE	Carton (wooden pallet): 1285mm(W)×895mm(D)×2070mm(H)
NUMBER OF SHELVES	8pcs
REFRIGERANT	R290/102gram
OPERATING CONDITIONS	Ambient Temperature: 5 - 43°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI

HOSHIZAKI MALAYSIA SDN. BHD.

No. 12, Jalan Penyajak U1/45B. Hicom-Glenmarie Industrial Park, 40150 Shah Alam, Selangor

TEL (+60) 3 5569 8023 <https://hoshizaki.com.my/>

