



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001



Compliant with
IEC60335-2-89 Standard

RT-158MC-S-PRS

UNDERCOUNTER PREP TABLE



Key Features



Lower running cost



Powerful cooling
performance



Self Closing Door



Removal door gaskets



Food Guard Shelf



Round Interior Corners



Large and clear display




Drainage-Free Design



LED lighting



Dimensions & Specifications

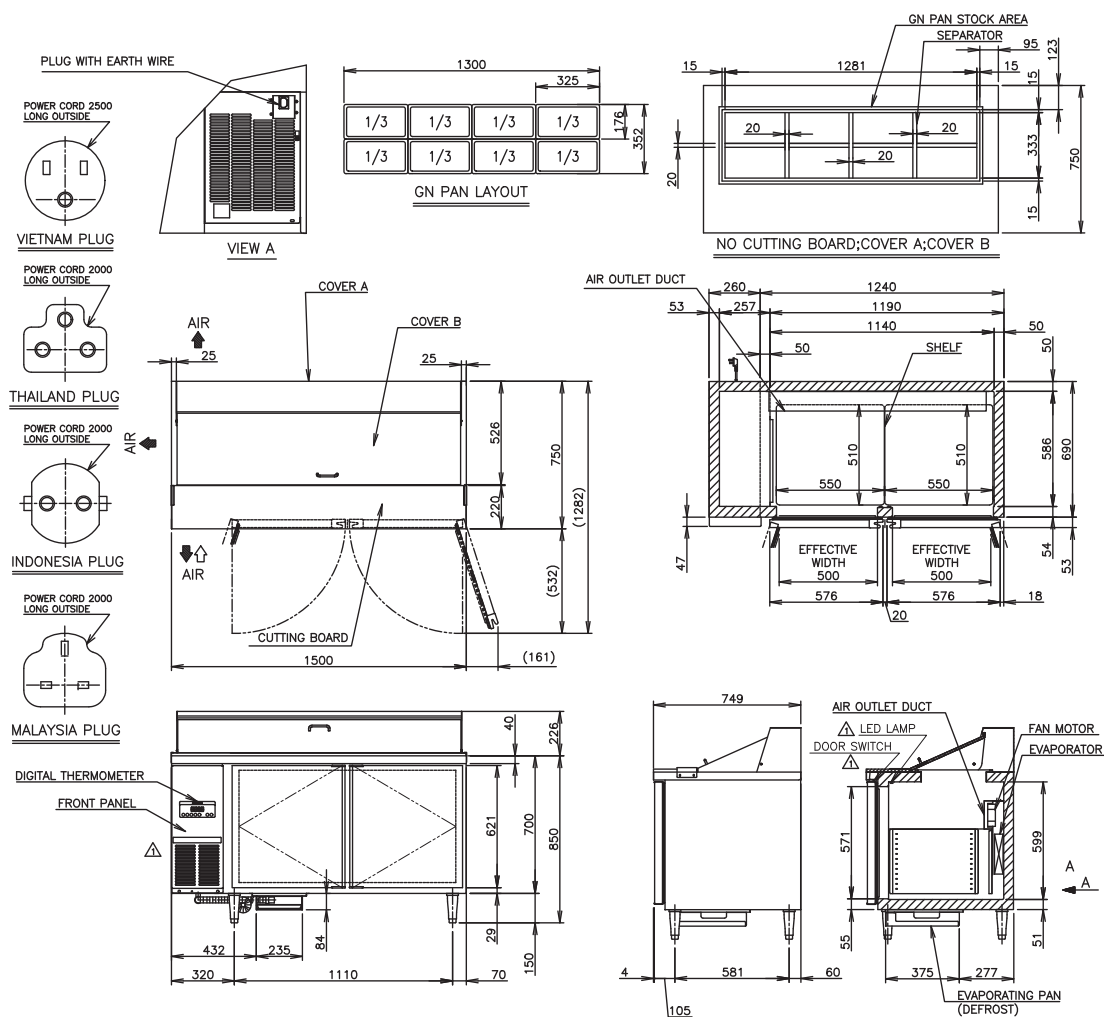

MODEL	RT-158MC-S-PRS
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.43kVA (1.86A)
ELECTRIC CONSUMPTION	278W
TEMPERATURE CONTROL	-2 to 12°C
STORAGE CAPACITY	444L
WEIGHT	Net: 118kg (Gross: Approx. 130kg)
OUTSIDE DIMENSIONS	1500mm(W)× 750mm(D)×1076(-1106)mm(H)
PACKAGE	Carton(Wooden Pallet): 1565mm(W)×830mm(D)×1070mm(H)
NUMBER OF SHELVES	4pcs
REFRIGERANT	R290
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI

HOSHIZAKI MALAYSIA SDN. BHD.

No. 12, Jalan Penyajak U1/45B. Hicom-Glenmarie
Industrial Park, 40150 Shah Alam, Selangor

TEL (+60) 3 5569 8023 <https://hoshizaki.com.my/>

