



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001



Compliant with
IEC60335-2-89 Standard

RT-186MC-PSG

UNDERCOUNTER SLIDING GLASS DOOR REFRIGERATOR




Key Features



Lower running cost



Powerful cooling
performance




Self Closing Door



Removal door gaskets



Food Guard Shelf



Round Interior Corners



Large and clear display




Drainage-Free Design



LED lighting



Dimensions & Specifications

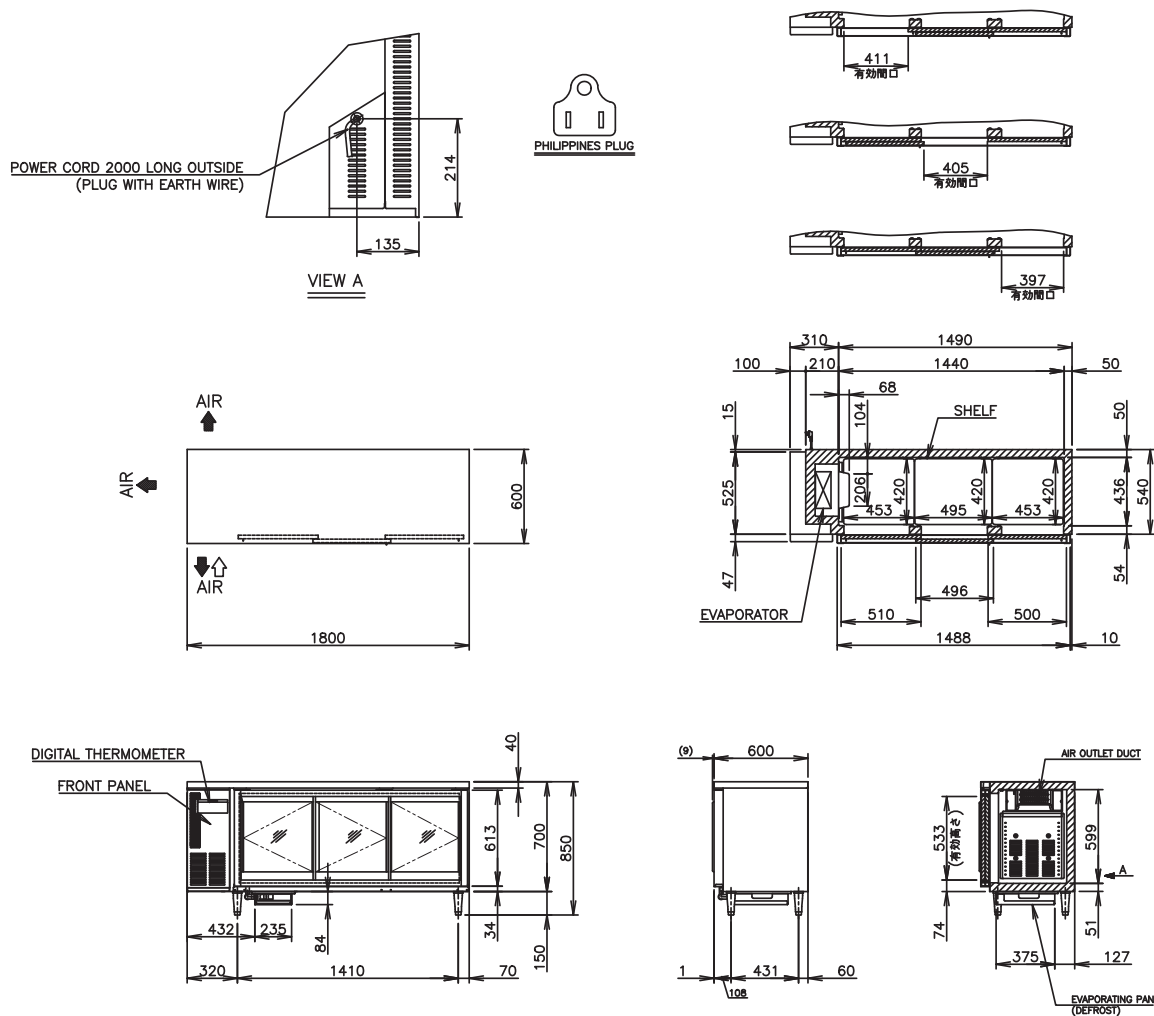

MODEL	RT-186MC-PSG
POWER SUPPLY	1 Phase 230V 60Hz Capacity: 0.71kVA (3.1A)
ELECTRIC CONSUMPTION	286W
TEMPERATURE CONTROL	-2 to 12°C
STORAGE CAPACITY	407L
WEIGHT	Net: 112kg (Gross: Approx. 124kg)
OUTSIDE DIMENSIONS	1800mm(W)× 600mm(D)×850(-880)mm(H)
PACKAGE	Carton 1865mm(W)×680mm(D)×790mm(H)
NUMBER OF SHELVES	6pcs
REFRIGERANT	R290
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI

HOSHIZAKI PHILIPPINES CORPORATION

Unit No. GB-2, G/F Agustin 1 Bldg., # 28 F. Ortigas Center, Pasig City,
Philippines 1605

TEL +632 8839 2861 <https://hoshizaki-sea.com/>

