



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001



Compliant with
IEC60335-2-89 Standard

RT-186MC-S-ML

UNDERCOUNTER PILLAR-LESS REFRIGERATOR



NATURAL
REFRIGERANTS




Key Features



Lower running cost



Powerful cooling
performance




Self Closing Door



Removal door gaskets



Food Guard Shelf



Round Interior Corners



Large and clear display



Drainage-Free Design




LED lighting




Dimensions & Specifications



POWER CORD 2000 LONG OUTSIDE
(UK PLUG WITH EARTH WIRE)






VIEW A(1/10)



UK PLUG

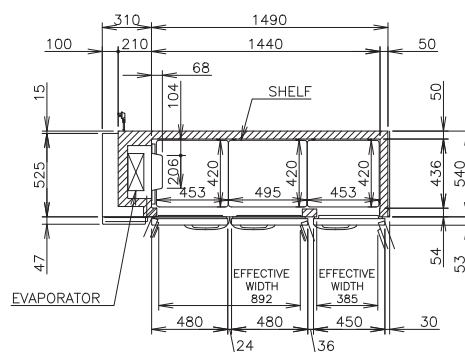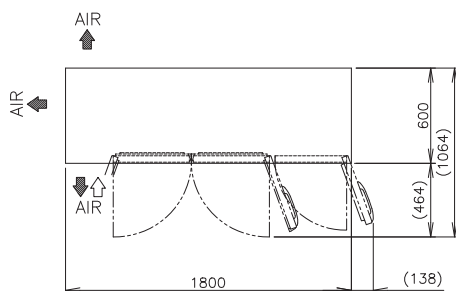

DIGITAL THERMOMETER
FRONT PANEL

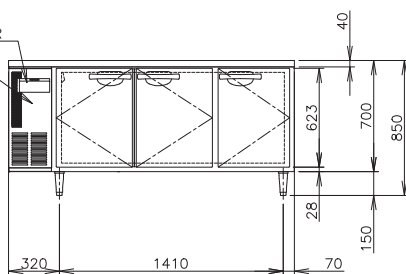

MODEL	RT-186MC-S-ML
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.41kVA (1.86A)
ELECTRIC CONSUMPTION	226W
TEMPERATURE CONTROL	-6 to 12°C
STORAGE CAPACITY	409L
WEIGHT	Net: 103kg (Gross: Approx. 115kg)
OUTSIDE DIMENSIONS	1800mm(W)× 600mm(D)×850(-880)mm(H)
PACKAGE	Carton(Wooden Pallet): 1865mm(W)×680mm(D)×845mm(H)
NUMBER OF SHELVES	6pcs
REFRIGERANT	R290
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI

HOSHIZAKI SINGAPORE PTE. LTD.

18 Boon Lay Way #01-102 Tradehub21, 609966

TEL 6225 2612 FAX 6225 3219

www.hoshizaki.com.sg

