



# HOSHIZAKI

## CERTIFICATION



HACCP International



ISO9001


## FTL-106MA-SD LOW DRAWER UNDERCOUNTER FREEZER



### Key Features



**Forced Evaporation  
System**










**2/3 GN Compatible  
Drawers**

(GN Trays are not included)\*  
\*Max. Depth 100mm

Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.



## Dimensions & Specifications

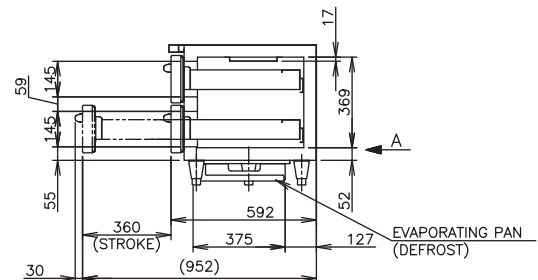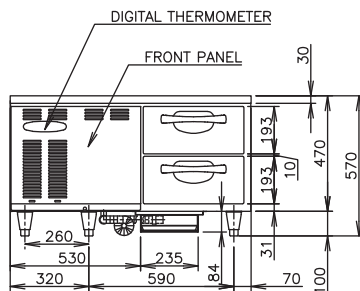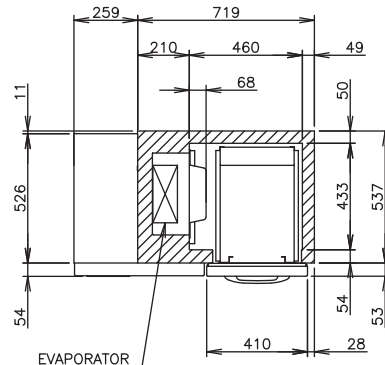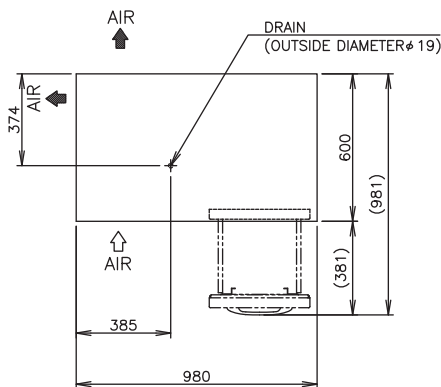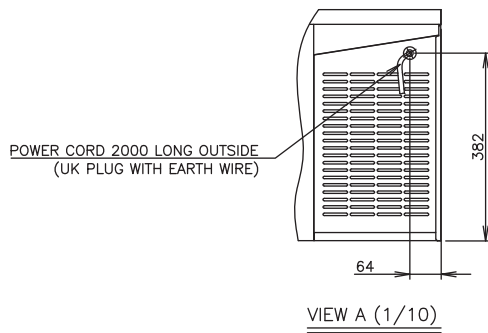

| MODEL                | FTL-106MA-SD                                                           |
|----------------------|------------------------------------------------------------------------|
| POWER SUPPLY         | 1 Phase 230V 50Hz Capacity: 0.95kVA(4.3A)                              |
| ELECTRIC CONSUMPTION | Heater: 409W Defrost: 330W                                             |
| TEMPERATURE CONTROL  | Microprocessor (Digital Temp. Indication) Adjustable from -23 to -7° C |
| EFFECTIVE CAPACITY   | 60L                                                                    |
| WEIGHT               | Net: 76kg (Gross 81kg)                                                 |
| OUTSIDE DIMENSIONS   | 980mm(W) × 600mm(D) × 570 (560-590) mm(H)                              |
| PACKAGE              | Carton 1045mm(W) × 680mm(D) × 560mm(H)                                 |
| AMPERAGE             | Rated: 3.0A                                                            |
| OPERATING CONDITIONS | Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%        |



# HOSHIZAKI

### PT. HOSHIZAKI INDONESIA

Kirana Boutique Office Kirana Avenue 2 Blok C2 No. 6 Jl. Raya  
Boulevard No.1 Kelapa Gading, Jakarta Utara, DKI Jakarta, 14240  
TEL +62-21-2937 5551/2 FAX +62 21 2937 5553  
<https://hoshizaki.co.id/>

