



# HOSHIZAKI

## CERTIFICATION



HACCP International




ISO9001


## RTL-108MA-SD LOW DRAWER UNDERCOUNTER REFRIGERATOR



### Key Features



**Forced Evaporation  
System**










**1/1 GN Compatible  
Drawers**

(GN Trays are not included)\*  
\*Max. Depth 100mm

Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.



## Dimensions & Specifications

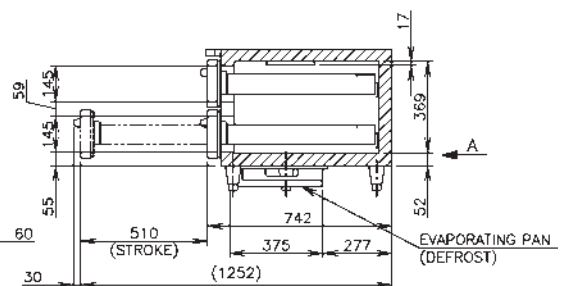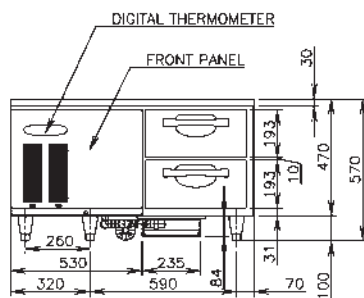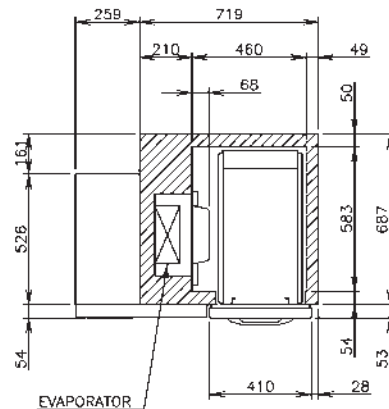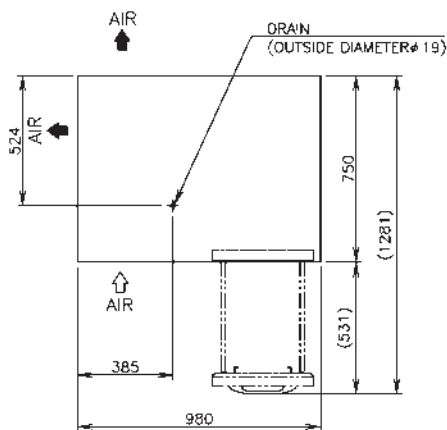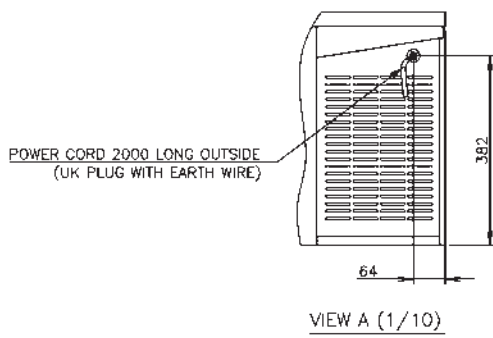

| MODEL                | RTL-108MA-SD                                                          |
|----------------------|-----------------------------------------------------------------------|
| POWER SUPPLY         | 1 Phase 220 - 240V 50Hz Capacity: 0.5kVA(2.27A)                       |
| ELECTRIC CONSUMPTION | 304W                                                                  |
| TEMPERATURE CONTROL  | Microprocessor (Digital Temp. Indication) Adjustable from -6 to 12° C |
| EFFECTIVE CAPACITY   | 85L                                                                   |
| WEIGHT               | Net: 67kg (Gross 72kg)                                                |
| OUTSIDE DIMENSIONS   | 980mm(W) × 750mm(D) × 570 (560-590) mm(H)                             |
| PACKAGE              | Carton 1045mm(W) × 830mm(D) × 560mm(H)                                |
| AMPERAGE             | Rated: 1.9 A                                                          |
| OPERATING CONDITIONS | Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%       |



# HOSHIZAKI

## HOSHIZAKI (THAILAND) LIMITED

No. 99 CP Tower North Park building 9th Floor, Zone D1, Soi Ngamwongwan 47

Intersection 42, Thung Song Hong, Subdistrict, Lak Si District, Bangkok 10210

TEL +66 2 005 9980 FAX +66 2 516 2646 <https://hoshizaki.co.th/en/>

