



HOSHIZAKI

CERTIFICATION



HACCP International




ISO9001

RTL-148MA-PD


LOW DRAWER UNDERCOUNTER REFRIGERATOR



Key Features



**Forced Evaporation
System**



**1/1 GN Compatible
Drawers**


(GN Trays are not included)*

*Max. Depth 100mm






Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.



Dimensions & Specifications

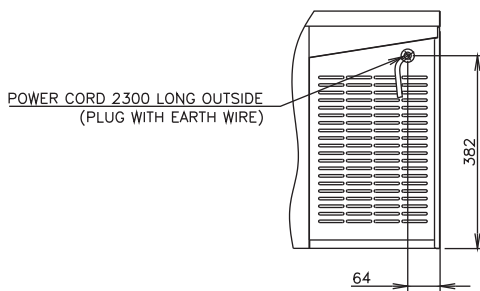

VIEW A (1/10)

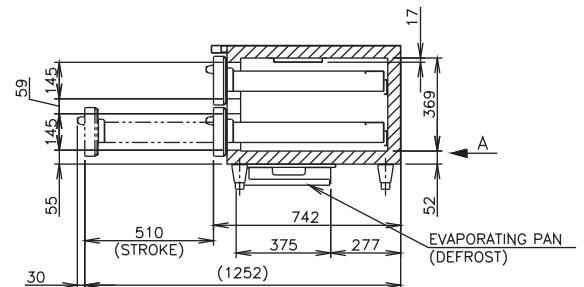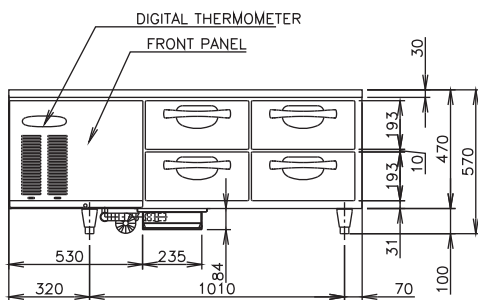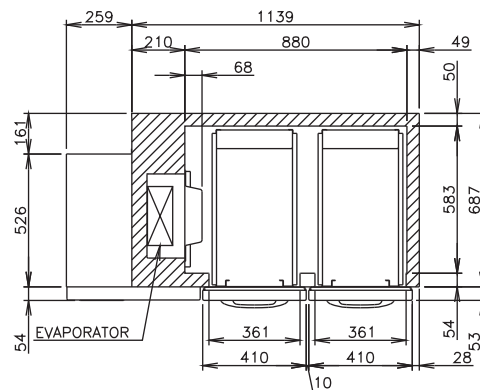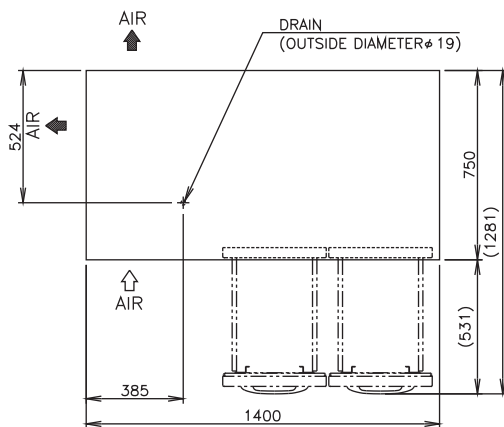

MODEL	RTL-148MA-PD
POWER SUPPLY	1 Phase 230V 60Hz Capacity: 0.55kVA(2.5A)
ELECTRIC CONSUMPTION	Heater: 250W Defrost: 165W
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -6 to 12° C
EFFECTIVE CAPACITY	176L
WEIGHT	Net: 95kg (Gross 100kg)
OUTSIDE DIMENSIONS	1400mm(W) × 750mm(D) × 560 (560-590) mm(H)
PACKAGE	Carton 1465mm(W) × 830mm(D) × 560mm(H)
AMPERAGE	Rated: 2.2 A
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI

HOSHIZAKI PHILIPPINES CORPORATION

Unit No. GB-2, G/F Agustin 1 Bldg., # 28 F. Ortigas Center, Pasig City, 1605

TEL +632 8839 2861 <https://hoshizaki-sea.com/>

