



HOSHIZAKI

CERTIFICATION



HACCP International




ISO9001

RT-186MA-S-3D UNDERCOUNTER REFRIGERATOR



Key Features



**Forced Evaporation
System**



**LED Interior
Lighting**




**2/3 GN Compatible
Drawers**

(GN Trays are not included)*
*Max. Depth 100mm

Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.



Dimensions & Specifications

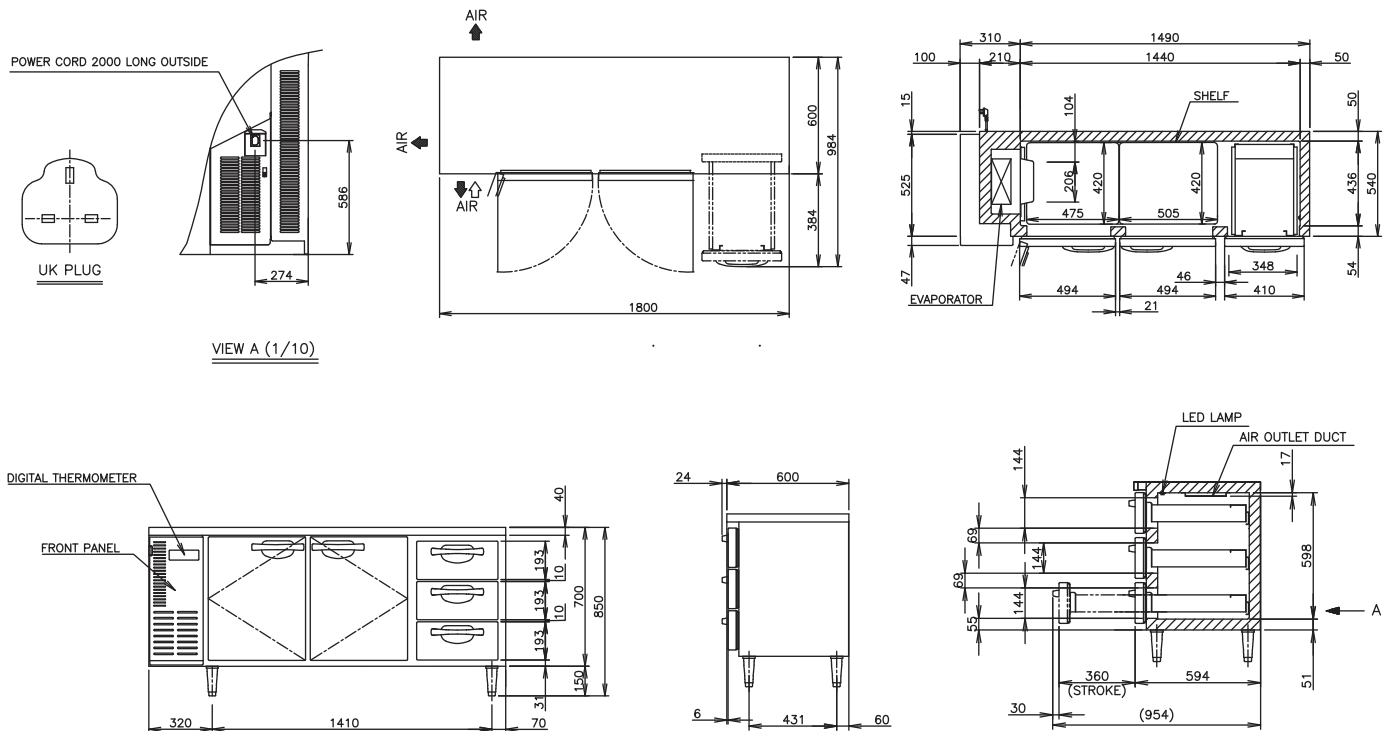

MODEL	RT-186MA-S-3D
POWER SUPPLY	1 Phase 230V 50Hz, Capacity: 0.67kVA (3.05A)
ELECTRIC CONSUMPTION	Motor: 270W, Heater: 201W, Refrigeration: 280W, Defrost: 165W
TEMPERATURE CONTROL	Microprocessor (Digital Temp Indication) Adjustable from -6 to 12°C
EFFECTIVE CAPACITY	401L
WEIGHT	Net: 93kg (Gross: Approx 98kg)
OUTSIDE DIMENSIONS	1800mm (W) x 600mm (D) x 850(-880)mm (H)
PACKAGE	Carton: 1865mm (W) x 680mm (D) x 790mm (H)
AMPERAGE	Rated 2.1A
SHELF	4 pcs
OPERATING CONDITIONS	Ambient Temperature: 5 to 38°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI

PT. HOSHIZAKI INDONESIA

Kirana Boutique Office Kirana Avenue 2 Blok C2 No. 6 Jl. Raya
Boulevard No.1 Kelapa Gading, Jakarta Utara, DKI Jakarta, 14240
TEL +62-21-2937 5551/2 FAX +62 21 2937 5553
<https://hoshizaki.co.id/>

