



HOSHIZAKI

CERTIFICATION



HACCP International




ISO9001

RT-186MA-SG

UNDERCOUNTER SWING GLASS DOOR REFRIGERATOR




Key Features



**Forced Evaporation
System**



**LED Interior
Lighting**




**Glass Door with
Heater**

Our A-fit cabinet combines functionality and excellent energy performance to meet Japan quality level with precise temperature control to ensure food ingredient freshness at all time.



Dimensions & Specifications

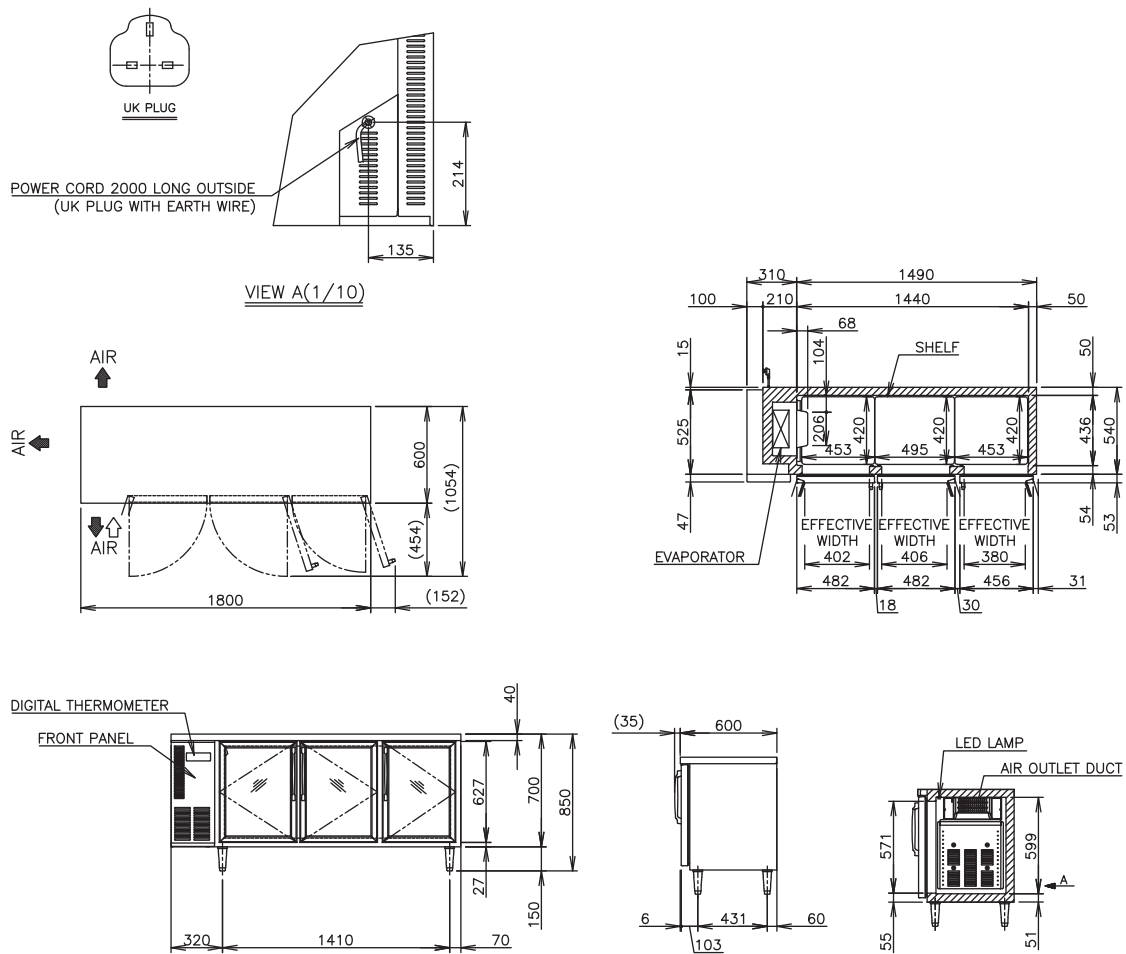

MODEL	RT-186MA-SG
POWER SUPPLY	1 Phase 230V 50Hz Capacity: 0.5kVA (2.5A)
ELECTRIC CONSUMPTION	Heater: 264W, Defrost: 165W
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -2 to 12° C
EFFECTIVE CAPACITY	401L
WEIGHT	Net: 113kg (Gross: Approx. 128kg)
OUTSIDE DIMENSIONS	1800mm(W)× 600mm(D)×850(-880)mm(H)
PACKAGE	Carton: 1865mm(W)×680mm(D)×790mm(H)
AMPERAGE	Rated: 2.5A
SHELF	6 pcs
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI

PT. HOSHIZAKI INDONESIA

Kirana Boutique Office Kirana Avenue 2 Blok C2 No. 6 Jl. Raya
Boulevard No.1 Kelapa Gading, Jakarta Utara, DKI Jakarta, 14240
TEL +62-21-2937 5551/2 FAX +62 21 2937 5553
<https://hoshizaki.co.id/>

