**HOSHIZAKI**

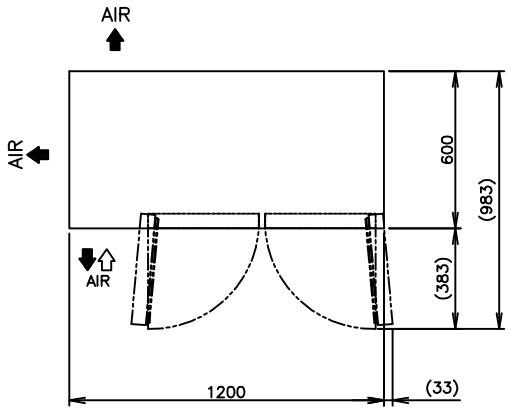


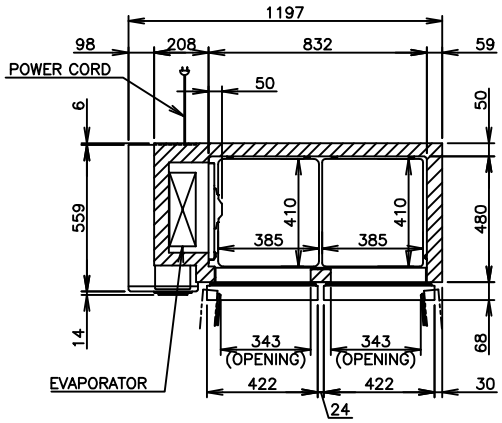


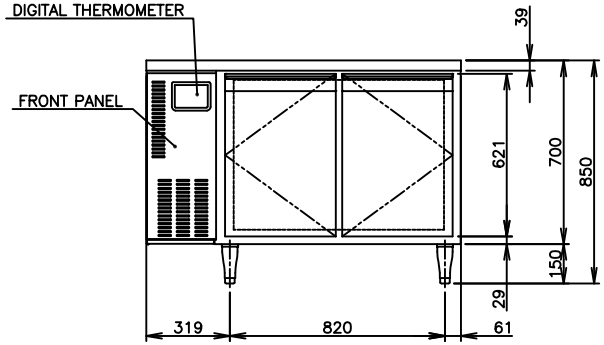


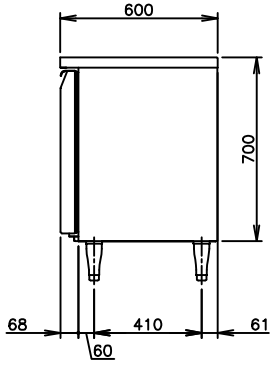


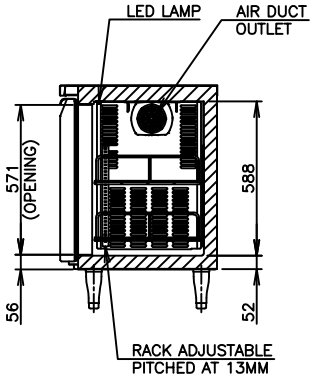


| | |
|---|---|
| ITEM | HOSHIZAKI UNDERCOUNTER FREEZER |
| MODEL | FTV−126A |
| ⚠1 POWER SUPPLY | SINGLE PHASE, 220−240V AC, 50HZ |
| RATED CURRENT | 2.5 AMPS |
| ⚠1 RATED POWER | 550 W (HEATER 350W) |
| HEAT REJECTION | 1.083 kW |
| POWER CORD | 10 AMPS / 3 METER |
| EFFECTIVE CAPACITY | 223 L |
| OUTSIDE DIMENSIONS | 1200MM(W)X600MM(D)X850(−870)MM(H) |
| INSIDE DIMENSIONS | 832MM(W) X 480MM(D) X 588MM(H) |
| EXTERIOR | SS 430 HAIRLINE NO 4 FINISH, GALVANIZED STEEL POWDER COATED (REAR/BOTTOM) |
| INTERIOR | SS 430 HAIRLINE NO 4 FINISH |
| INSULATION | POLYURETHANE FOAM (CFC FREE) |
| INSULATION FOAM BLOWING AGENT | CYCLOPENTANE |
| REFRIGERATION SYSTEM | FORCED AIR CIRCULATION |
| DEFROST SYSTEM | HEATER DEFROST (295 W) |
| ⚠1 COMPRESSOR | HERMETIC 650 W |
| CONDENSER | FORCED (WIRE ON TUBE) |
| EVAPORATOR | FORCED (FIN & TUBE) |
| REFRIGERANT/ CHARGE | R290 / 75 Gram |
| TEMP. CONTROL | ELECTRONIC ADJUSTABLE FROM −7°C TO −23°C |
| DEFROST CONTROL | BY TEMPERATURE CONTROLLER |
| ELECTRIC CIRCUIT PROTECTION | NON RESETTABLE FUSE (GLASS FUSE) 10 AMP |
| COMPRESSOR PROTECTION | MOTOR PROTECTOR |
| LEG | PLASTIC ADJUSTABLE 150 TO 170MM |
| SHELF | 4 PCS |
| WEIGHT | NET: 94 KG (GROSS: APPROX 110 KG) |
| PACKAGE | CARTON (WOODEN PALLET) 1270MM (W) X 670MM (D) X 875MM(H) |
| ASSESSORIES | SHELF CLIPS |
| OPERATING CONDITIONS | AMBIENT TEMPERATURE : 5 − 43°C VOLTAGE RANGE RATED VOLTAGE ±6% |
| CABINET LAMP | LED STRIP TYPE 700MM, 6W, DC24V |
| LAMP DRIVER | ELECTRONIC DRIVER 8.5W |

*WE RESERVE THE RIGHT TO MAKE CHANGES IN SPECIFICATIONS AND DESIGN WITHOUT PRIOR NOTICE

1. INSTALL THE PRODUCT PROPERLY IN ACCORDANCE WITH THE INSTRUCTIONS ON LOCATION, ELECTRICAL CONNECTIONS STATED IN THE INSTRUCTION MANUAL PROVIDED.
   ALLOW 10MM EXTRA SPACE AT THE INSTALLATION SITE TO MEET ANY INSTALLATION REQUIREMENTS (ADDITIONAL SPACING IS ALSO REQUIRED FOR PROPER AIR FLOW AND PIPE CONNECTIONS).
2. THE HEAT REJECTION IS BASED ON THE REACHED PULL DOWN TEMPERATURE AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.
   THE AMPERAGE AND ELECTRIC CONSUMPTION ARE BASED ON MEASUREMENT AT AMBIENT TEMPERATURE OF 43°C AND POWER SUPPLY OF 230VAC 50HZ.
3. TOLERANCE ON WEIGHT IS ±5 KG
4. PRODUCT CODE: KT04

# HOSHIZAKI UNDERCOUNTER FREEZER FTV−126A

| APPROVED | CHECKED | DESIGNED | DRAWN | SCALE | |
|---|---|---|---|---|---|
| NGOC SANG | NGOC SANG | BA HUY | BA HUY | 1/20 | TRIGONOMETRY |

| | | | | | | |
|---|---|---|---|---|---|---|
| NGOC SANG | BA HUY | ⚠1 | 2026.01.30 | DATE | DRAWING NO. | SYMBOL |
| APPROVED | DESIGNED | SYMBOL | DATE | 2025.12.25 | D44231 | ⚠1 |