


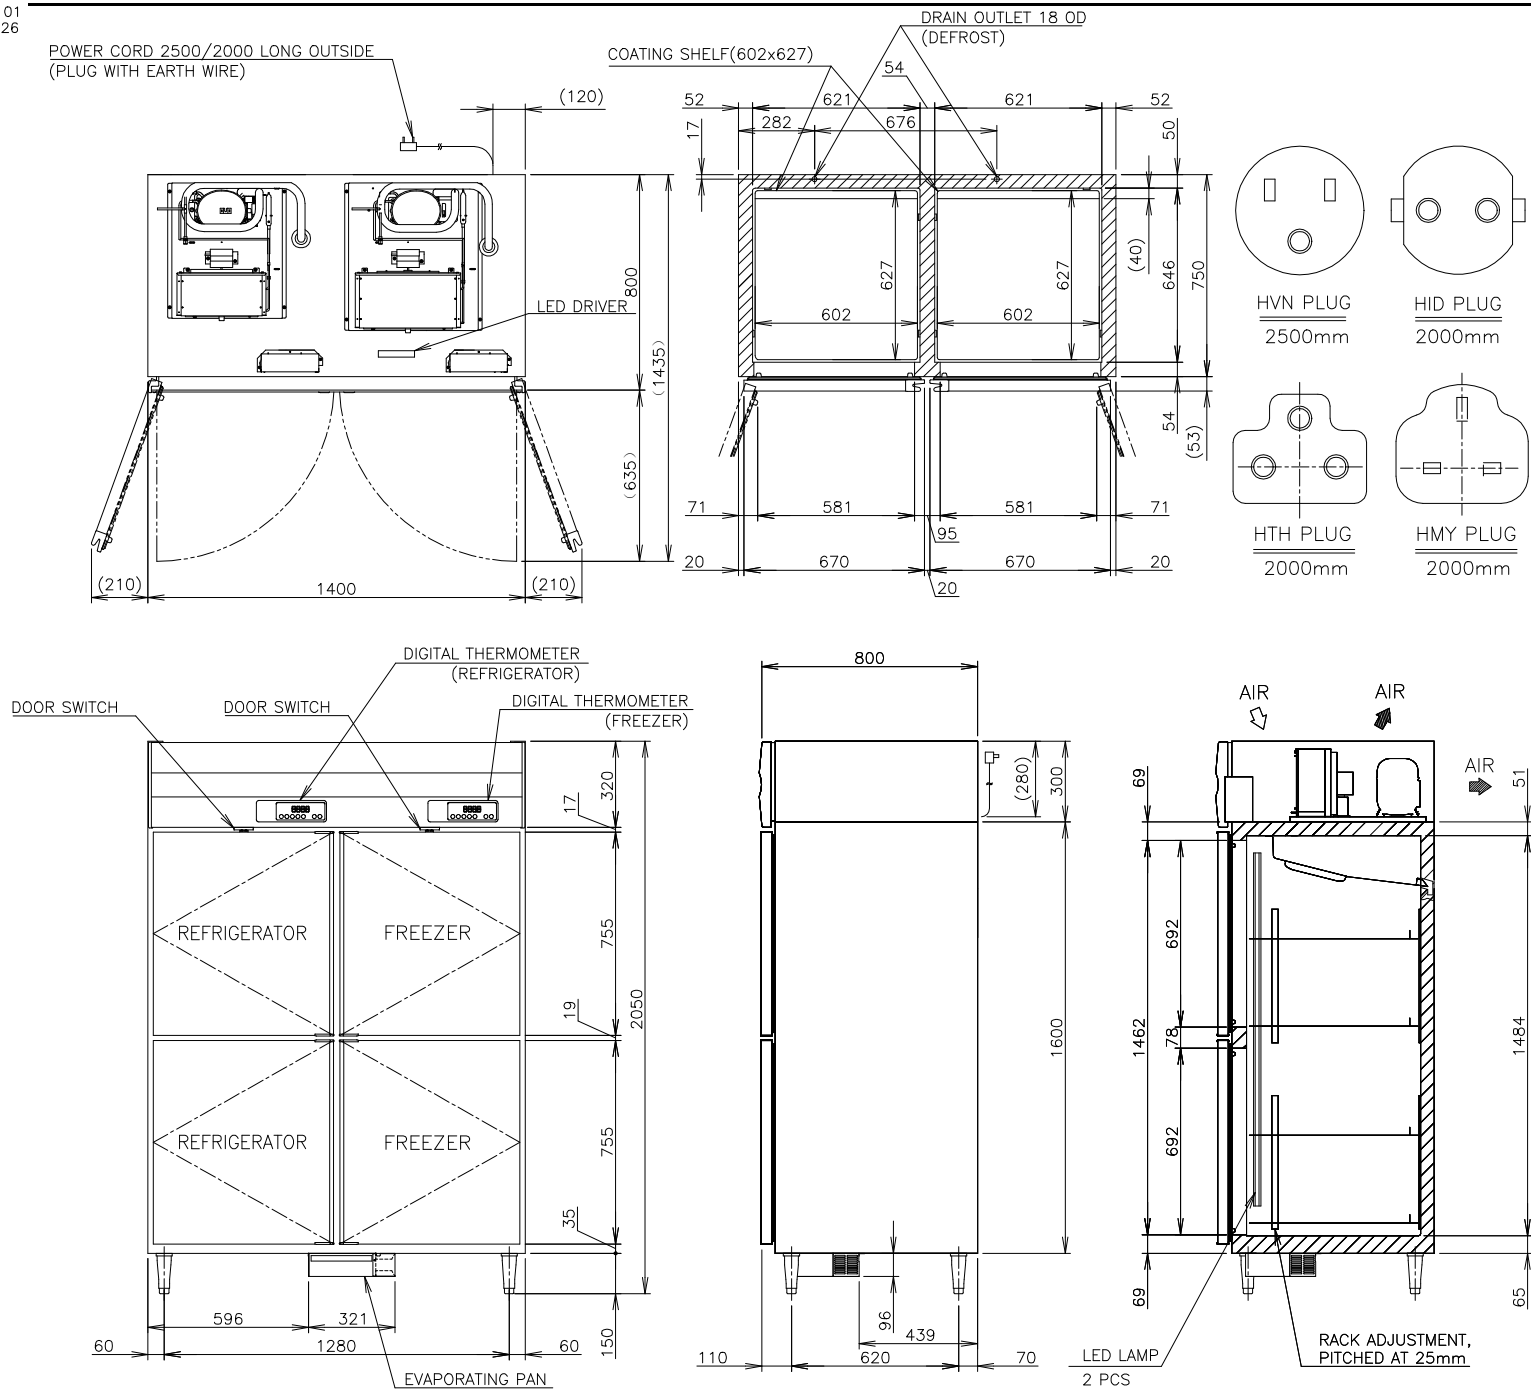

ITEM	Hoshizaki Reach-in Freezer/Refrigerator	
MODEL	HRF-148MC-S	
POWER SUPPLY	1 Phase 220~240V 50Hz Capacity: 2.17kVA (5.10A)	
AMPERAGE	Rated: 5.6A	
ELECTRIC CONSUMPTION	MOTOR 617W(POWER FACTOR 78%) Heater 634W Refrigeration 763W Defrost 400W	
HEAT REJECTION	1815W	
POWER CORD	Plug with Earth Wire	
EFFECTIVE CAPACITY	Total 860L (Refrigerator: 430L, Freezer: 430L)	
OUTSIDE DIMENSIONS	1400mm(W)x800mm(D)x2050(-2080)mm(H)	
INSIDE DIMENSIONS	Refrigerator 621mm(W)x646mm(D)x1484mm(H) Freezer 621mm(W)x646mm(D)x1484mm(H)	
EXTERIOR	Stainless Steel, Galvanized Steel(Top, Rear, Bottom)	
INTERIOR	Stainless Steel, ABS Plastic(Door)	
INSULATION	Polyurethane Foam	
INSULATION FOAM BLOWING AGENT	Cyclopentane	
REFRIGERATION SYSTEM	Forced Air Circulation	
DEFROST SYSTEM	Refrigerator Freezer	Heater Heater
COMPRESSOR	Refrigerator Freezer	Hermetic Hermetic
CONDENSER	Refrigerator Freezer	Wire and Tube Type, Air-cooled Wire and Tube Type, Air-cooled
EVAPORATOR	Refrigerator Freezer	Fin and Tube type Fin and Tube type
REFRIGERANT	Refrigerator Freezer	R290 R290
TEMPERATURE CONTROL	Refrigerator Freezer	Microprocessor Controlled (Digital Temperature Indication) Adjustable from -6 to 12℃ Microprocessor Controlled (Digital Temperature Indication) Adjustable from -25 to -7℃
DEFROST CONTROL	Microprocessor	
ELECTRIC CIRCUIT PROTECTION	Earth Wire, Circuit Breaker	
REFRIGERANT CIRCUIT PROTECTION	Motor Protector (Auto-reset)	
LEG	Plastic Adjustable from 150 to 180mm	
SHELF	8 pcs.	
WEIGHT	172kg (Gross 207kg)	
PACKAGE	Carton (Wooden Pallet) 1460mm(W)x900mm(D)x2075mm(H)	
ACCESSORIES	Drain Hose x 1, Drain Pan x 1	
OPERATING CONDITIONS	Ambient Temperature: 5 - 38℃ Voltage Range: Rated Voltage ±6%	

*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, water supply/ drain connections and electrical connections stated in the instruction and installation manuals provided.
Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The heat rejection is based on the reached pull-down temperature at ambient temperature of 35℃
3. Product Code: S184-V100 HVN, S184-V200 HID
S184-V300 HTH, S184-V400 HMY