


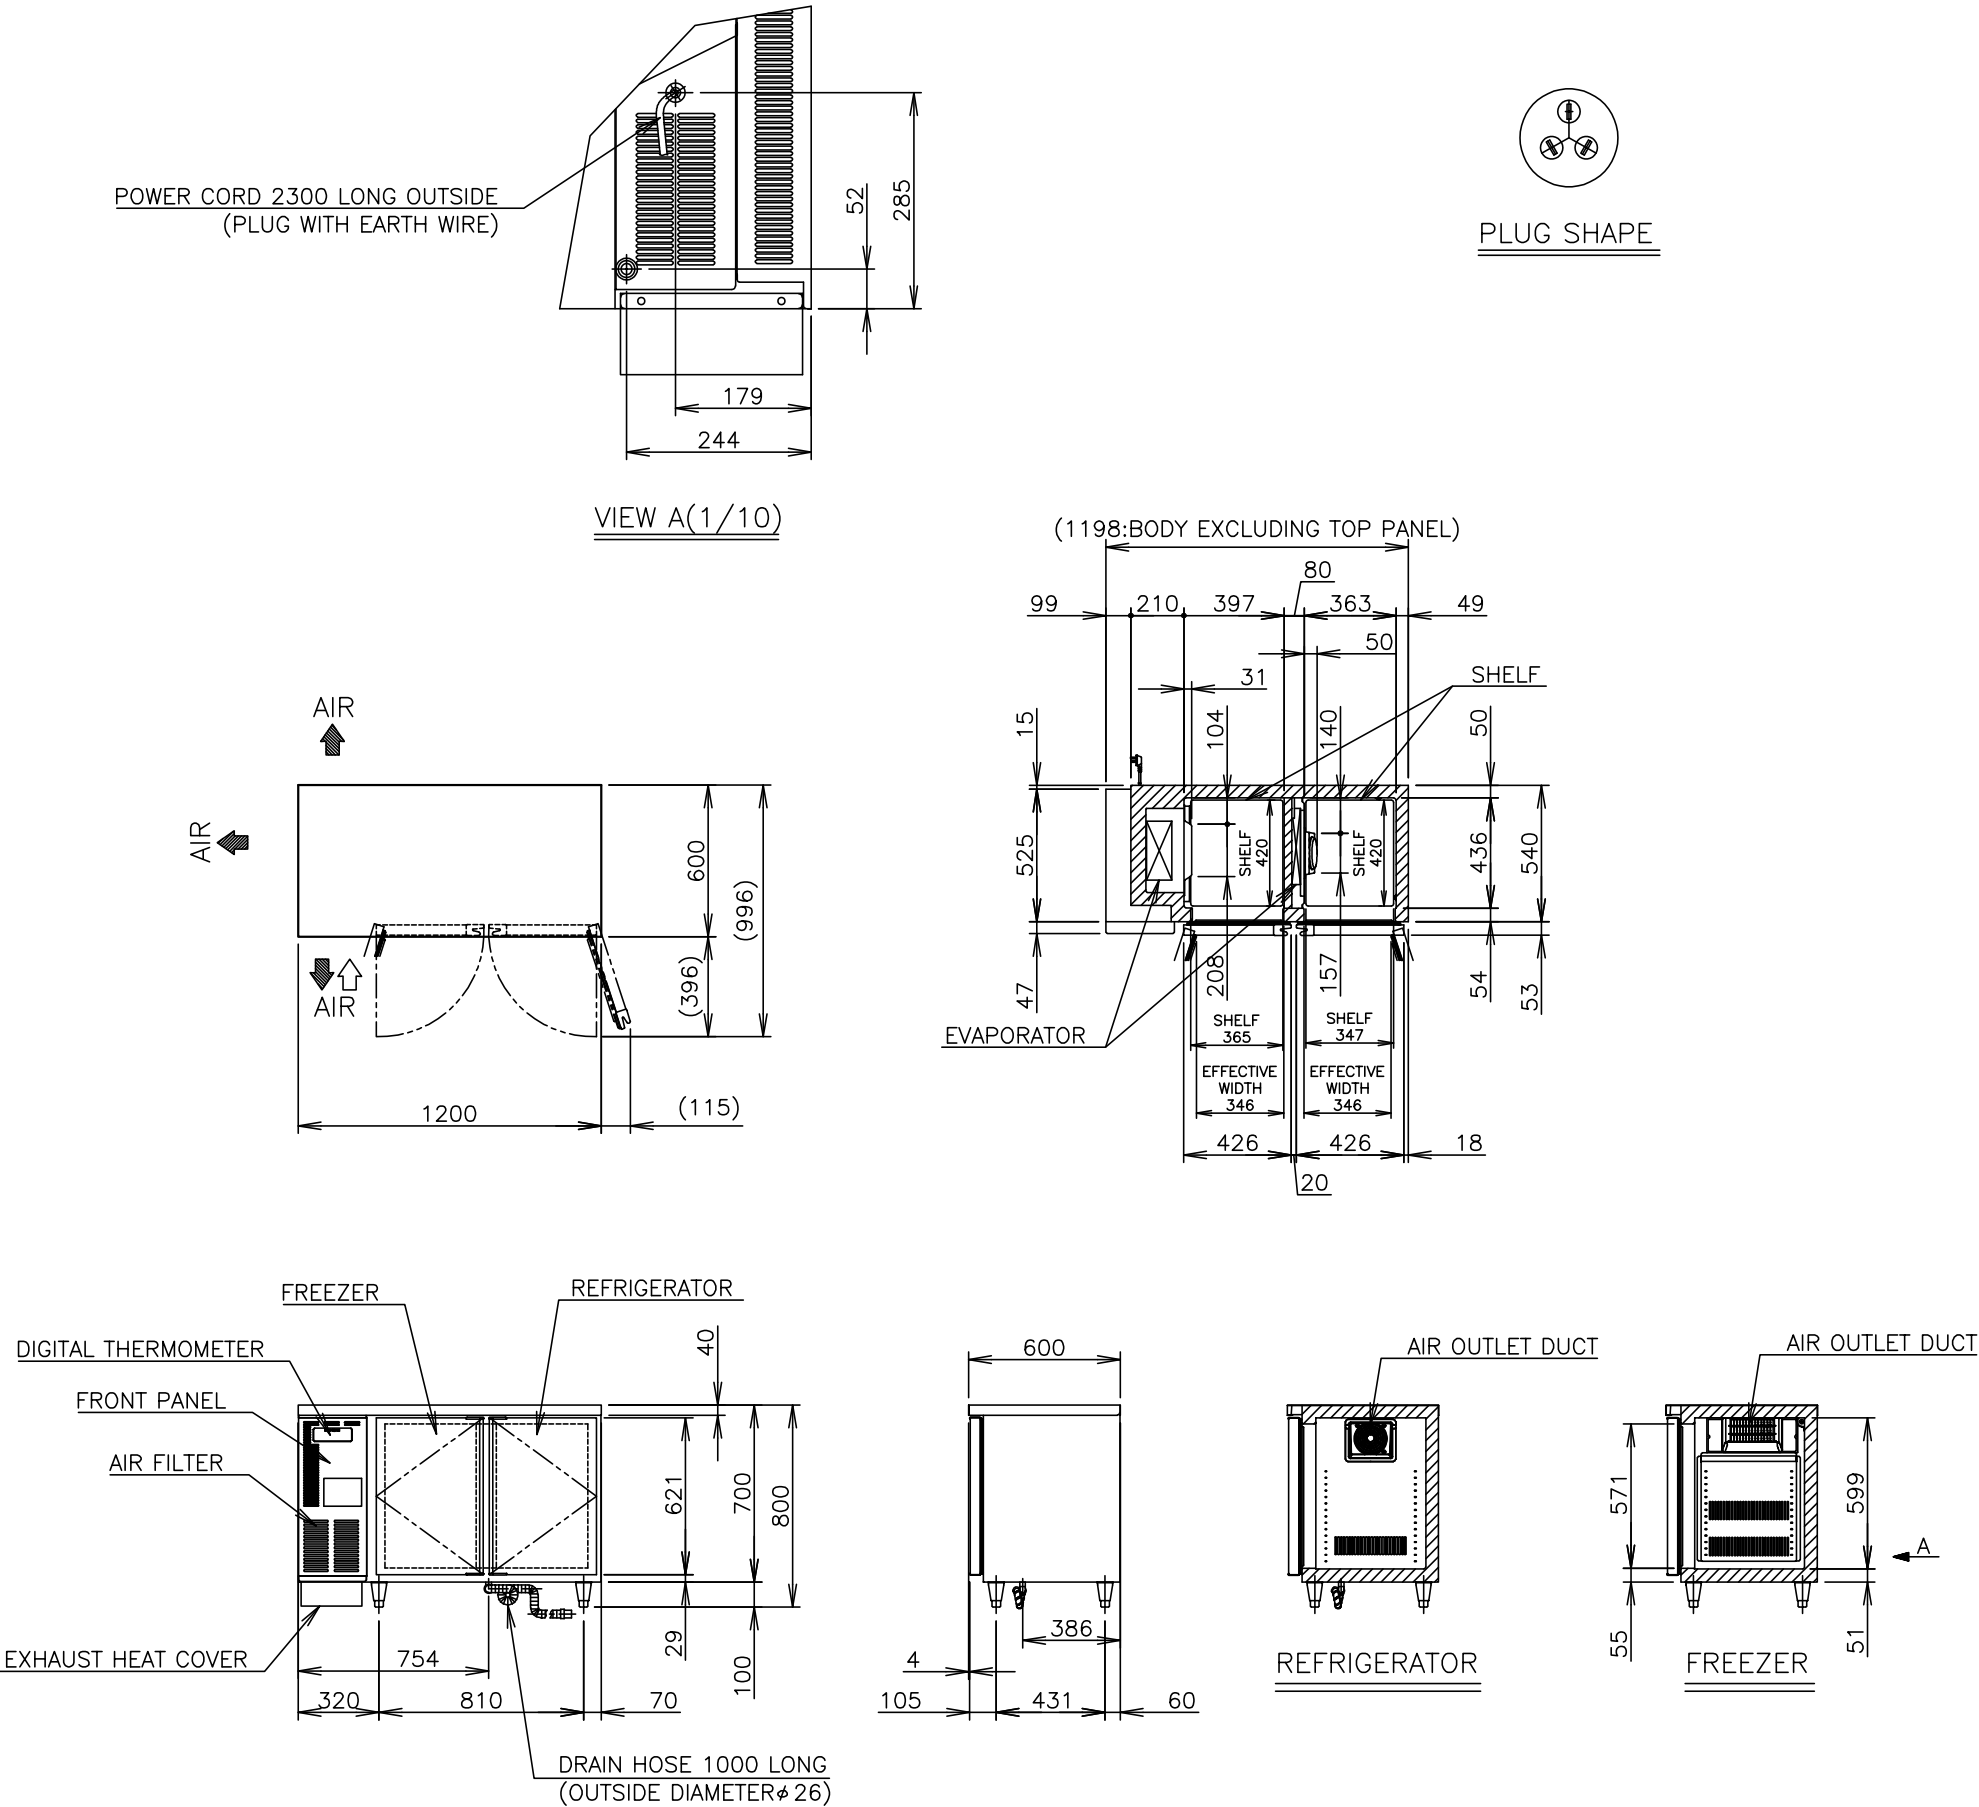

ITEM	Hoshizaki Undercounter Freezer/Refrigerator
MODEL	RFT-126MC
POWER SUPPLY	1 Phase 220V~ 50Hz Capacity: ???kVA (???A)
AMPERAGE	Rated ??A
ELECTRIC CONSUMPTION	Motor ???W(Power Factor ??%) Heater ???W Refrigeration ???W Defrost ???W
HEAT REJECTION	???W
POWER CORD	2.3m (Plug with Earth Wire)
EFFECTIVE CAPACITY	Total ???L (Refrigerator:127L, Freezer:134L)
OUTSIDE DIMENSIONS	1200mm (W) x 600mm (D) x 800 (790-820)mm (H)
INSIDE DIMENSIONS	Refrigerator: 364mm (W) x 436mm (D) x 599mm (H) Freezer: 364mm (W) x 436mm (D) x 599mm (H)
EXTERIOR	Stainless Steel, Galvanized Steel (Rear / Bottom) ABS Plastic (Top & Bottom on Door)
INTERIOR	Stainless Steel, ABS Plastic (Door)
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
DEFROST SYSTEM	Glass Tube Heater
COMPRESSOR	Hermetic
CONDENSER	Fin and Tube type, Air-cooled
EVAPORATOR	Fin and Tube Type
REFRIGERANT	R290
TEMPERATURE CONTROL	Microprocessor controlled Adjustable from Refrigerator -6 to 12℃ Freezer -25 to -7℃
DEFROST CONTROL	Microprocessor controlled
ELECTRIC CIRCUIT PROTECTION	Earth Wire, Circuit Breaker
COMPRESSOR PROTECTION	Motor Protector
LEG	Plastic Adjustable 90 to 120mm
SHELF	2pcs.
WEIGHT	Net: 87kg (Gross: Approx. 108kg)
PACKAGE	Carton 1265mm (W) x 680mm (D) x 865mm (H)
ACCESSORIES	Drain Hose
OPERATING CONDITIONS	Ambient Temperature: 5-35℃ Voltage Range: Rated Voltage±6%

- *We reserve the right to make changes in specifications and design without prior notice.
1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
 2. The cabinet temperature range of -25 to -7℃ is guaranteed at ambient temperature of 30℃.
 3. Product code: T424