


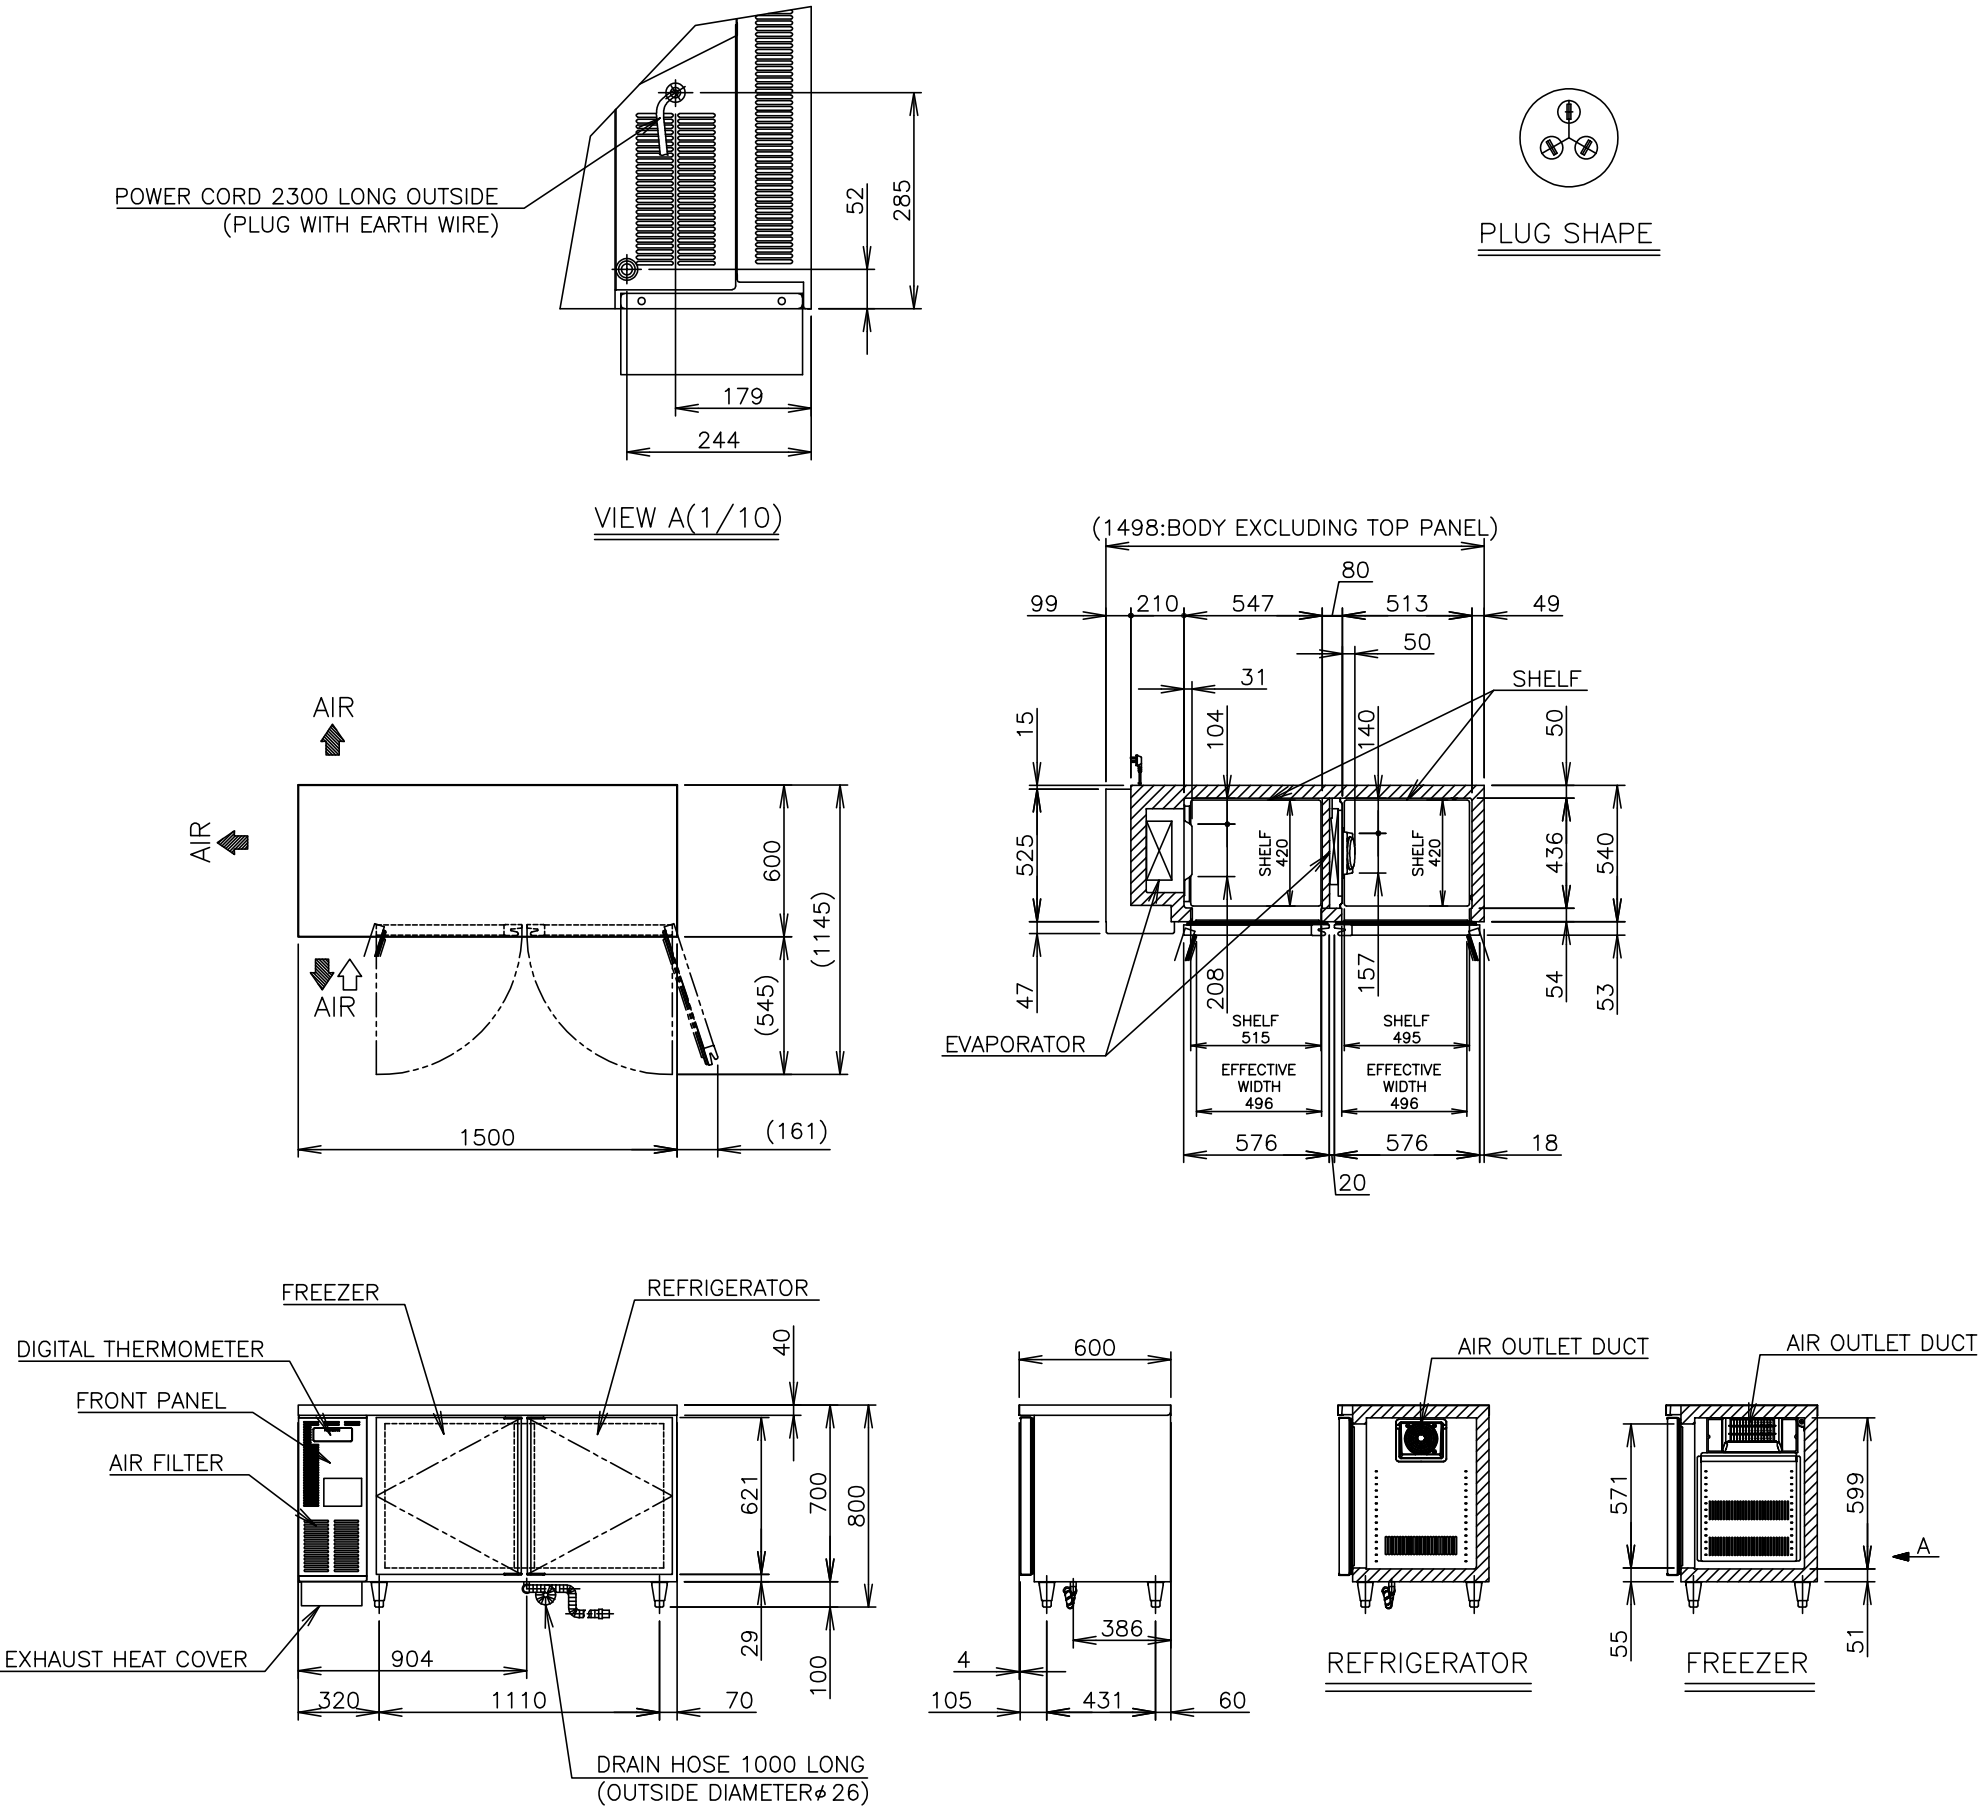

|                               |                                                                                               |
|-------------------------------|-----------------------------------------------------------------------------------------------|
| ITEM                          | Hoshizaki Undercounter Freezer/Refrigerator                                                   |
| MODEL                         | RFT-156MC                                                                                     |
| POWER SUPPLY                  | 1 Phase 220V~ 50Hz Capacity: ???kVA (???A)                                                    |
| AMPERAGE                      | Rated ??A                                                                                     |
| ELECTRIC CONSUMPTION          | Motor ???W(Power Factor ??%) Heater ???W Refrigeration ???W Defrost ???W                      |
| HEAT REJECTION                | ???W                                                                                          |
| POWER CORD                    | 2.3m (Plug with Earth Wire)                                                                   |
| EFFECTIVE CAPACITY            | Total ???L (Refrigerator:180L, Freezer:187L)                                                  |
| OUTSIDE DIMENSIONS            | 1500mm (W) x 600mm (D) x 800 (790-820)mm (H)                                                  |
| INSIDE DIMENSIONS             | Refrigerator: 513mm (W) x 436mm (D) x 599mm (H)<br>Freezer: 547mm (W) x 436mm (D) x 599mm (H) |
| EXTERIOR                      | Stainless Steel, Galvanized Steel (Rear / Bottom)<br>ABS Plastic (Top & Bottom on Door)       |
| INTERIOR                      | Stainless Steel, ABS Plastic (Door)                                                           |
| INSULATION                    | Polyurethane Foam                                                                             |
| INSULATION FOAM BLOWING AGENT | Cyclopentane                                                                                  |
| REFRIGERATION SYSTEM          | Forced Air Circulation                                                                        |
| DEFROST SYSTEM                | Glass Tube Heater                                                                             |
| COMPRESSOR                    | Hermetic                                                                                      |
| CONDENSER                     | Fin and Tube type, Air-cooled                                                                 |
| EVAPORATOR                    | Fin and Tube Type                                                                             |
| REFRIGERANT                   | R290                                                                                          |
| TEMPERATURE CONTROL           | Microprocessor controlled Adjustable from Refrigerator -6 to 12℃ Freezer -25 to -7℃           |
| DEFROST CONTROL               | Microprocessor controlled                                                                     |
| ELECTRIC CIRCUIT PROTECTION   | Earth Wire, Circuit Breaker                                                                   |
| COMPRESSOR PROTECTION         | Motor Protector                                                                               |
| LEG                           | Plastic Adjustable 90 to 120mm                                                                |
| SHELF                         | 2pcs.                                                                                         |
| WEIGHT                        | Net: 94kg (Gross: Approx. 116kg)                                                              |
| PACKAGE                       | Carton 1565mm (W) x 680mm (D) x 865mm (H)                                                     |
| ACCESSORIES                   | Drain Hose                                                                                    |
| OPERATING CONDITIONS          | Ambient Temperature: 5-35℃<br>Voltage Range: Rated Voltage±6%                                 |

\*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The cabinet temperature range of -25 to -7℃ is guaranteed at ambient temperature of 30℃.
3. Product code: T425