



POWER CORD 2000 LONG OUTSIDE
(UK PLUG WITH EARTH WIRE)







VIEW A(1/10)





UK PLUG

5. Product code: T435-V030
6. During the operation of the machine, dew will form on the surface of the glass door.

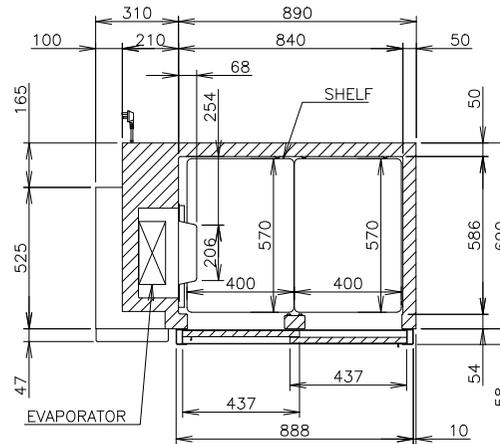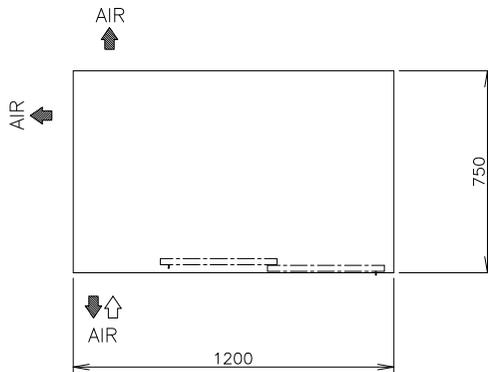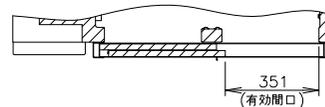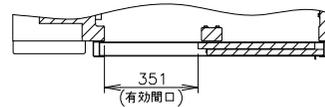


DIGITAL THERMOMETER

FRONT PANEL

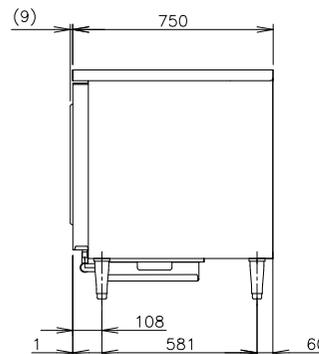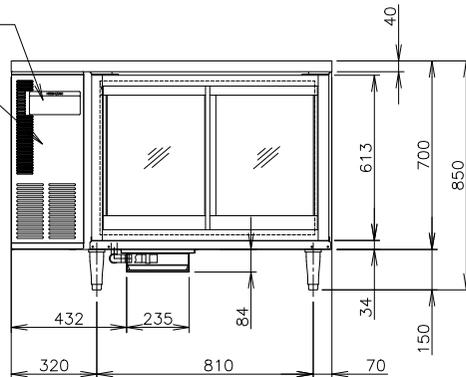

LED LAMP

AIR OUTLET DUCT

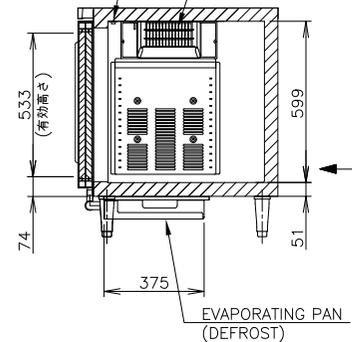

| | |
|-------------------------------|--|
| ITEM | Hoshizaki Undercounter Refrigerator |
| MODEL | RT-128MC-SSG |
| POWER SUPPLY | 1 Phase 230V 50Hz Capacity: 0.41kVA (1.86A) |
| AMPERAGE | Rated *A |
| ELECTRIC CONSUMPTION | Motor 158W(Power Factor 96%) Heater 271W Refrigeration 179W Defrost 190W |
| HEAT REJECTION | 476W |
| POWER CORD | 2.0m (UK Plug with Earth Wire) |
| EFFECTIVE CAPACITY | Net:212L/Gross:310L (Based on ISO 22041-2019) |
| ENERGY CONSUMPTION | ***kWh/day (Based on ISO 22041-2019) |
| OUTSIDE DIMENSIONS | 1200mm (W) x 750mm (D) x 850(-880) mm (H) |
| INSIDE DIMENSIONS | 840mm (W) x 586mm (D) x 599mm (H) |
| EXTERIOR | Stainless Steel, Galvanized Steel (Rear/Bottom) Double Layer Glass with Heat Reflection Film(Glass Door) |
| INTERIOR | Stainless Steel |
| INSULATION | Polyurethane Foam |
| INSULATION FOAM BLOWING AGENT | Cyclopentane |
| REFRIGERATION SYSTEM | Forced Air Circulation |
| DEFROST SYSTEM | Glass Tube Heater |
| COMPRESSOR | Hermetic |
| CONDENSER | Wire and Tube type, Air-cooled |
| EVAPORATOR | Fin and Tube Type |
| REFRIGERANT | R290 |
| TEMPERATURE CONTROL | Microprocessor (Digital Temp Indication) Adjustable from -2 to 12°C |
| DEFROST CONTROL | Microprocessor controlled |
| ELECTRIC CIRCUIT PROTECTION | Fuse, Earth Wire |
| COMPRESSOR PROTECTION | Motor Protector |
| LEG | Plastic Adjustable 150 to 180mm |
| SHELF | 4pcs. |
| WEIGHT | Net: 87kg (Gross: Approx. 99kg) |
| PACKAGE | Carton 1265mm (W) x 830mm (D) x 845mm (H) |
| ACCESSORIES | - |
| OPERATING CONDITIONS | Ambient Temperature: 5-38°C Voltage Range: Rated Voltage±6% |

*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements(additional spacing is also required for proper air flow and pipe connections).
2. The amperage and electric consumption are based on measurements at ambient temperature of 32°C and power supply of 230V 50Hz.
3. The cabinet temperature range of -2 to 12°C is guaranteed at ambient temperature of 25°C.
4. Depending on the installation environment, the glass door and the front frame of the body may dew and drop.

HOSHIZAKI UNDERCOUNTER REFRIGERATOR RT-128MC-SSG

| | | | | | |
|--------------------|-----------------|-----------------|--------------------|--------------------|-----------------------|
| APPROVED LIANGK | CHECKED ZHOU | DESIGNED LXF | DRAWN LXF | SCALE 1/20 | TRIGONOMETRY |
| LIANG APPROVED | LY DESIGNED | △ SYMBOL | 2025.11.24 DATE | 2025.09.18 DATE | DRAWING NO. D43491 |
| | | | | | SYMBOL △ |