

CERTIFICATION




ICE MATE

by  **HOSHIZAKI**

SRM-650AB-14-B-801SA

ICE MAKER

HALF DICE



ICEMATE is committed to bringing high-efficiency / energy-saving, and high quality ice-making product to people who have dreams and desire to create their own business with the best scientific technology and manufacturing

KEY FEATURES

SAFETY AND HYGIENE ASSURED ICE MACHINE

AUTO-CLEANING




Timely maintenance of water system can extend life of equipment.

PURE ICE



Overflow self-cleaning function, ensuring ice hygiene

IoT



Slow melt Dilution




Powerful Ice Making




Energy & Water Saving, Quiet Operation

BIN TOP VIEW

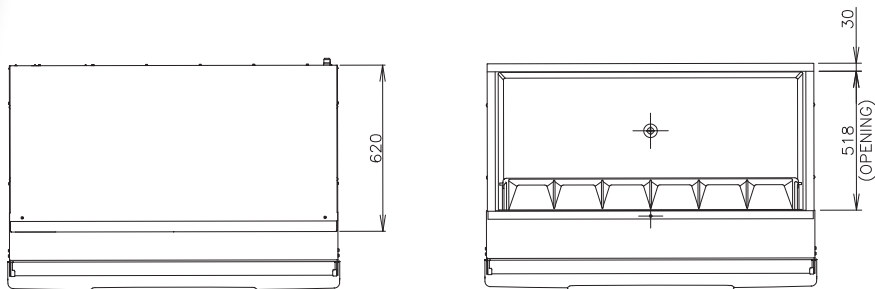


BIN TOP VIEW


FRONT SIDE

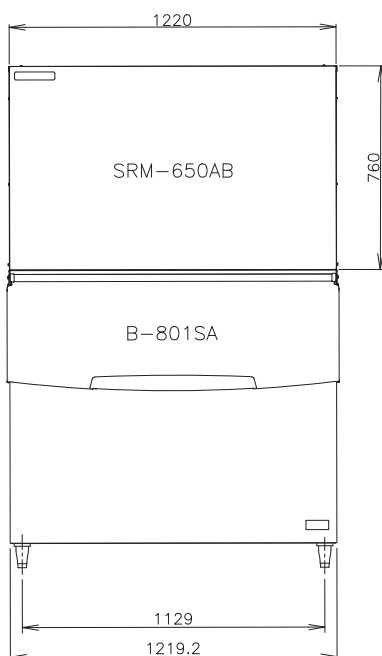

RIGHT SIDE

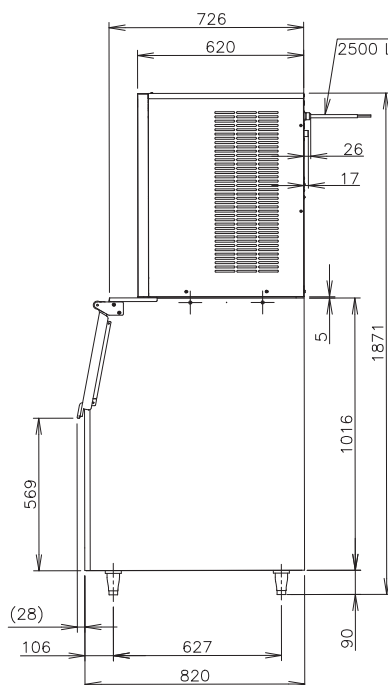

BACK SIDE

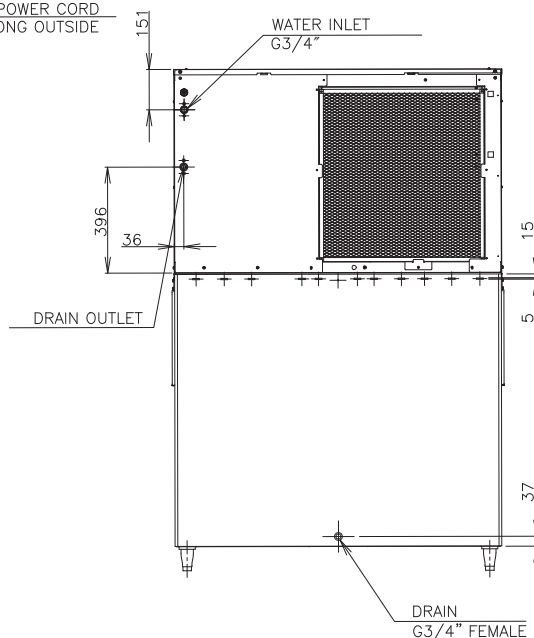

SPECIFICATIONS

Ice Dimensions	Half Dice: 29mm*14mm*22mm	
Outside Dimensions	1220mm(W) x 820mm(D) x 1871(~1901)mm(H)	
Package Dimensions	Ice Maker: Pallet + Carton:1325mm(W) x 720mm(D) x 945mm(H) Storage Bin: Pallet + Carton:1239mm(W) x 916mm(D) x 1142mm(H)	
Weight (Net / Gross)	Ice Maker: 120kg/144kg Storage Bin: 64kg/86kg	
Amperage/Starting Amperage	11.4A/85A	
Electrical Consumption	(AT32°C / WT21°C)	2334W
Refrigerant Charge	R404A/1300g	
Ice Storage Capacity	Maximum: 348kg	
Ice Production per 24H	(AT10°C / WT10°C)	Approx:690kg
	(AT21°C / WT15°C)	Approx:607kg
	(AT32°C / WT21°C)	Approx:492kg
Ice water consumption per 24H	(AT32°C/WT21°C)	500L(1.0L/kg ice)
Ice Production Freeze Cycle Time	(AT21°C/WT15°C)	Approx:14.5min
Ice Production per Cycle	(AT21°C/WT15°C)	Approx:6.14kg/754pcs
OPERATING CONDITIONS		
Voltage Range	198-242V	
Ambient Temperature	5-38°C	
Water Supply Temperature	5-32°C	
Water Supply Pressure	0.07-0.55MPa(0.7-5.5bar)	
Supply Voltage	1 Phase 220V 50Hz	



HOSHIZAKI

HOSHIZAKI SINGAPORE PTE. LTD.

18 Boon Lay Way #01-102 Tradehub21, 609966

TEL 6225 2612 | FAX 6225 3219 | www.hoshizaki.com.sg