

CERTIFICATION




ICE MATE

by  **HOSHIZAKI**

SRM-650AB-B-801SA

ICE MAKER

DICE



ICEMATE is committed to bringing high-efficiency / energy-saving, and high quality ice-making product to people who have dreams and desire to create their own business with the best scientific technology and manufacturing

KEY FEATURES

SAFETY AND HYGIENE ASSURED ICE MACHINE

AUTO-CLEANING

Timely maintenance of water system can extend life of equipment.




PURE ICE

Overflow self-cleaning function, ensuring ice hygiene



IoT



Slow melt Dilution




Powerful Ice Making




Energy & Water Saving, Quiet Operation

BIN TOP VIEW

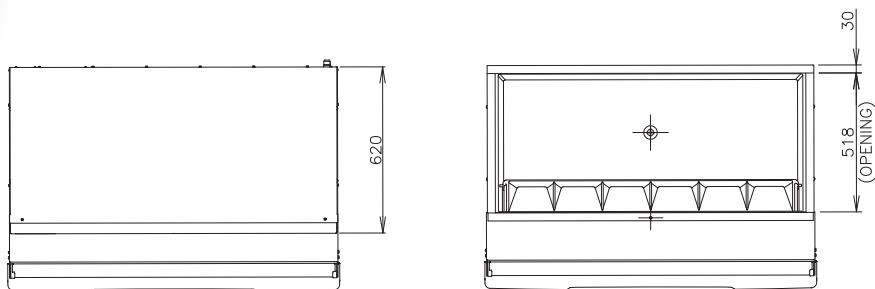


BIN TOP VIEW


FRONT SIDE

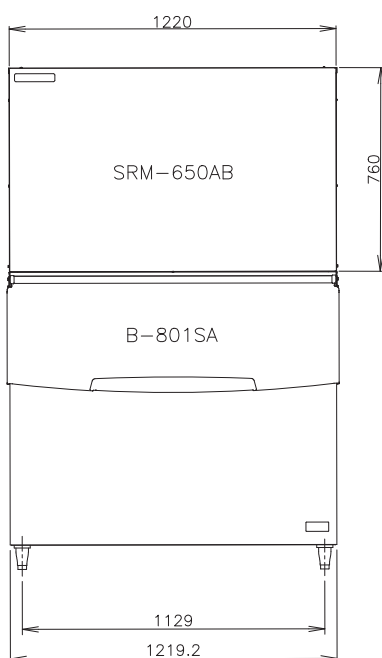

RIGHT SIDE

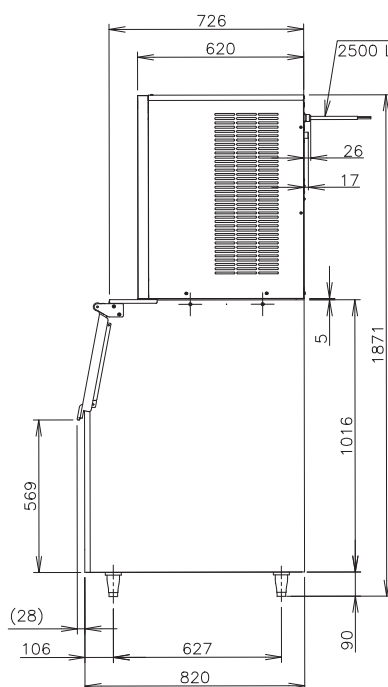

BACK SIDE

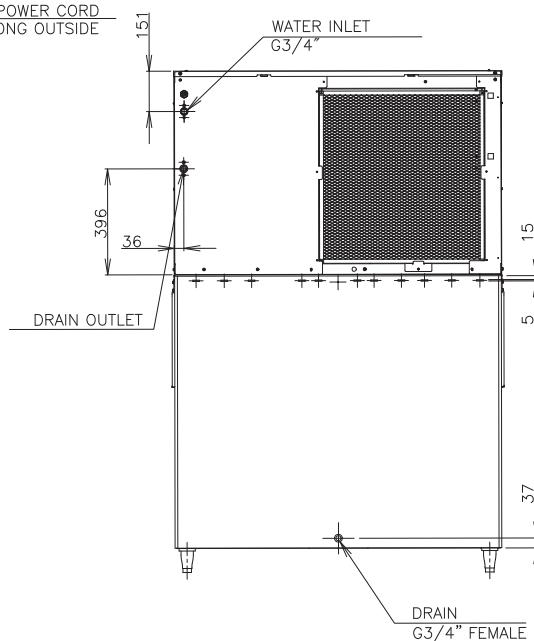

SPECIFICATIONS

Ice Dimensions	Dice: 22mm*22mm*22mm	
Outside Dimensions	1220mm(W) x 820mm(D) x 1871(~1901)mm(H)	
Package Dimensions	Ice Maker: Pallet + Carton: 1325mm(W) x 720mm(D) x 945mm(H) Storage Bin: Pallet + Carton: 1239mm(W) x 916mm(D) x 1142mm(H)	
Weight (Net / Gross)	Ice Maker: 118kg/142kg Storage Bin: 64kg/86kg	
Amperage/Starting Amperage	11.3A/85A	
Electrical Consumption	(AT32°C / WT21°C)	2296W
Refrigerant Charge	R404A/1200g	
Ice Storage Capacity	Maximum: 348kg	
Ice Production per 24H	(AT10°C / WT10°C)	Approx: 723kg
	(AT21°C / WT15°C)	Approx: 622kg
	(AT32°C / WT21°C)	Approx: 483kg
Ice water consumption per 24H	(AT32°C / WT21°C)	490L (1.0L/kg ice)
Ice Production Freeze Cycle Time	(AT21°C / WT15°C)	Approx: 13min
Ice Production per Cycle	(AT21°C / WT15°C)	Approx: 5.55kg/612pcs
OPERATING CONDITIONS		
Voltage Range	198-242V	
Ambient Temperature	5-38°C	
Water Supply Temperature	5-32°C	
Water Supply Pressure	0.07-0.55MPa (0.7-5.5bar)	
Supply Voltage	1 Phase 220V 50Hz	



HOSHIZAKI

HOSHIZAKI MALAYSIA SDN. BHD.

No. 12, Jalan Penyajak U1/45B. Hicom-Glenmarie
Industrial Park, 40150 Shah Alam, Selangor
TEL (+60) 3 5569 8023 | <https://hoshizaki.com.my/>