



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001



Compliant with IEC60335-2-89 Standard


RFT-186MC-S UNDERCOUNTER DUAL TEMP.



Key Features



Lower running cost



Powerful cooling performance




Self Closing Door



Removal door gaskets



Food Guard Shelf



Round Interior Corners



Large and clear display




Drainage-Free Design



LED lighting



Dimensions & Specifications

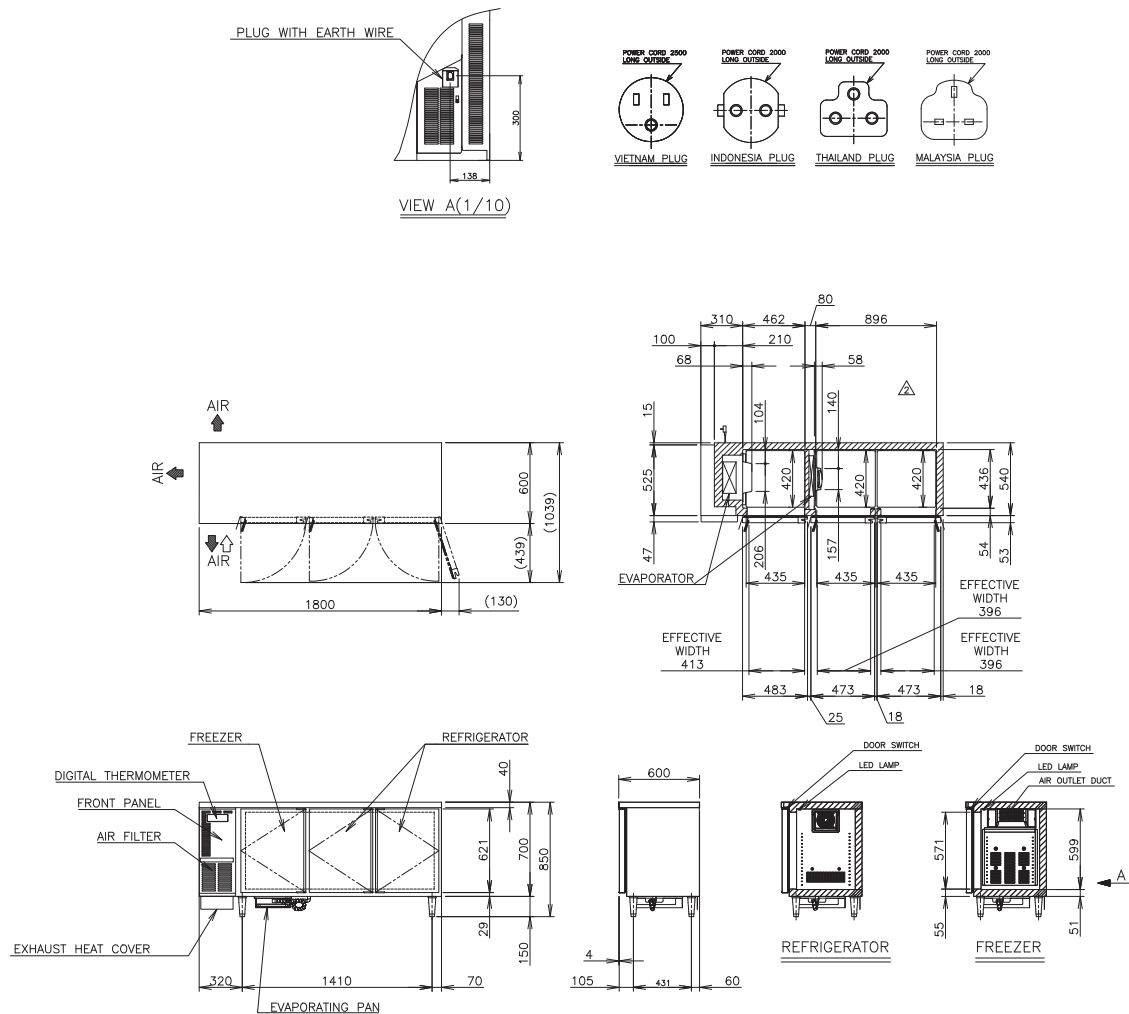

MODEL	RFT-186MC-S
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.75kVA (3.50A)
ELECTRIC CONSUMPTION	506W
TEMPERATURE CONTROL	Refrigerator: -6 to 12°C, Freezer: -25 to -7°C
STORAGE CAPACITY	384L (Refrigerator: 258L, Freezer: 126L)
WEIGHT	Net: 109kg (Gross: Approx. 130kg)
OUTSIDE DIMENSIONS	1800mm(W)× 600mm(D)×850(-880)mm(H)
PACKAGE	Carton: 1865mm(W)×680mm(D)×845mm(H)
NUMBER OF SHELVES	6
REFRIGERANT	R290
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI

HOSHIZAKI MALAYSIA SDN. BHD.

No. 12, Jalan Penyajak U1/45B. Hicom-Glenmarie Industrial Park, 40150 Shah Alam, Selangor

TEL (+60) 3 5569 8023 <https://hoshizaki.com.my/>

