



# HOSHIZAKI

## CERTIFICATION



HACCP International



ISO9001



Compliant with IEC60335-2-89 Standard

## HR-128MC-SLD UPRIGHT LONG SOLID DOOR REFRIGERATOR



### Key Features



Lower running cost



Powerful cooling performance



Self Closing Door



Removal door gaskets



Food Guard Shelf



Round Interior Corners



Large and clear display




Drainage-Free Design



LED lighting



## Dimensions & Specifications

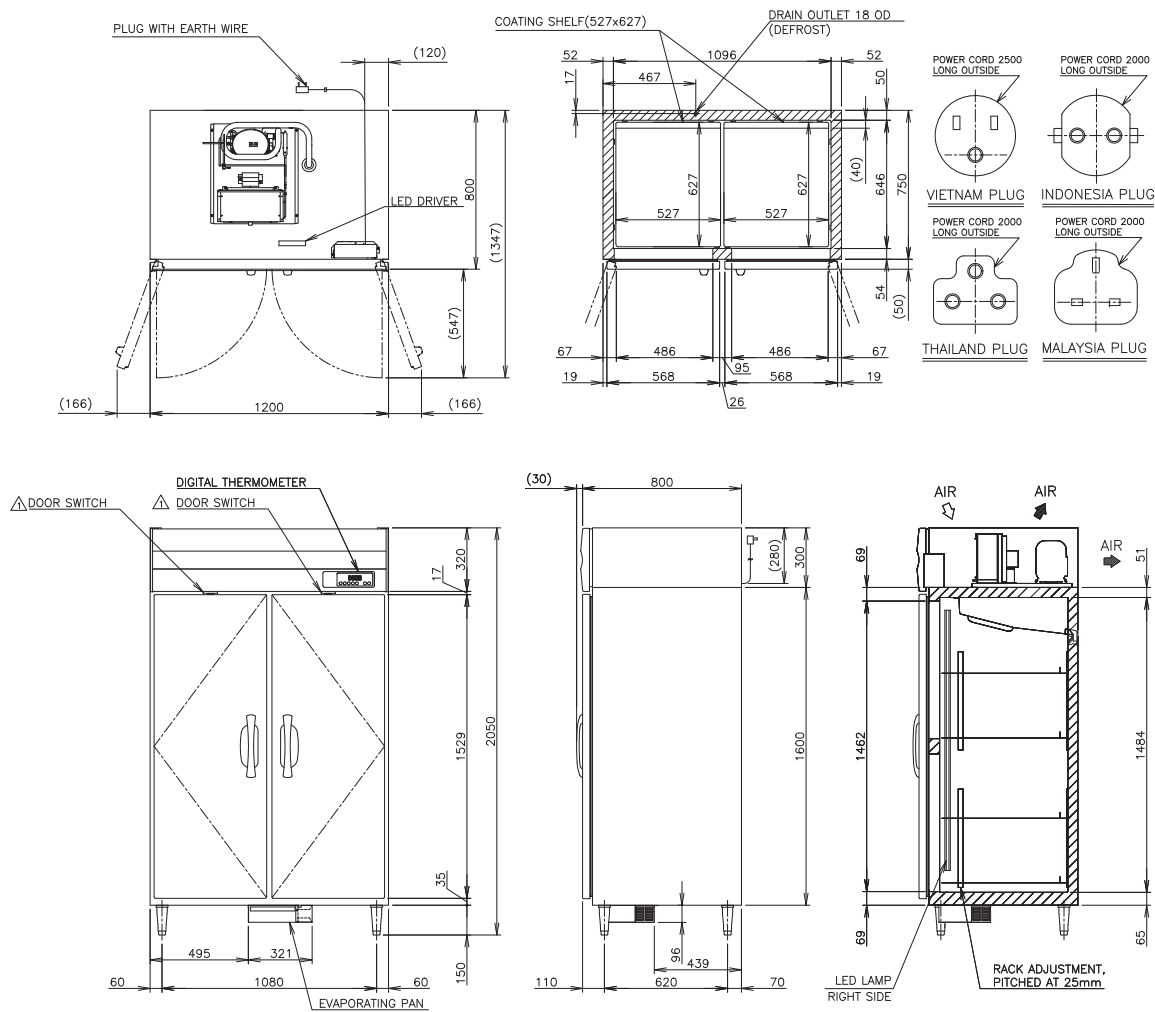

|                             |   |
|-----------------------------|---|
| <b>MODEL</b>                | <b>HR-128MC-SLD</b>   |
| <b>POWER SUPPLY</b>         | 1 Phase 220-240V 50Hz Capacity: 0.63kVA (2.90A)                 |
| <b>ELECTRIC CONSUMPTION</b> | 429W  |
| <b>TEMPERATURE CONTROL</b>  | -6 to 12°C  |
| <b>STORAGE CAPACITY</b>     | 1043L   |
| <b>WEIGHT</b>               | Net: 132kg (Gross: Approx. 161kg)                               |
| <b>OUTSIDE DIMENSIONS</b>   | 1200mm(W)× 800mm(D)×2050(-2080)mm(H)                            |
| <b>PACKAGE</b>              | Carton(Wooden Pallet): 1260mm(W)×900mm(D)×2075mm(H)             |
| <b>NUMBER OF SHELVES</b>    | 8   |
| <b>REFRIGERANT</b>          | R290  |
| <b>OPERATING CONDITIONS</b> | Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6% |



# HOSHIZAKI

### HOSHIZAKI (THAILAND) LIMITED

No. 99 CP Tower North Park building 9th Floor, Zone D1 Soi  
 Ngamwongwan 47 Intersection 42, Thung Song Hong  
 Subdistrict, Lak Si District, Bangkok 10210 Thailand  
 TEL +66 2 005 9980 FAX +66 2 516 2646  
<https://hoshizaki-sea.com/>

