



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001



Compliant with IEC60335-2-89 Standard

HR-148MC-S-ML

UPRIGHT PILLAR-LESS REFRIGERATOR




Key Features



Lower running cost



Powerful cooling performance




Self Closing Door



Removal door gaskets



Food Guard Shelf



Round Interior Corners



Large and clear display




Drainage-Free Design



LED lighting



Dimensions & Specifications

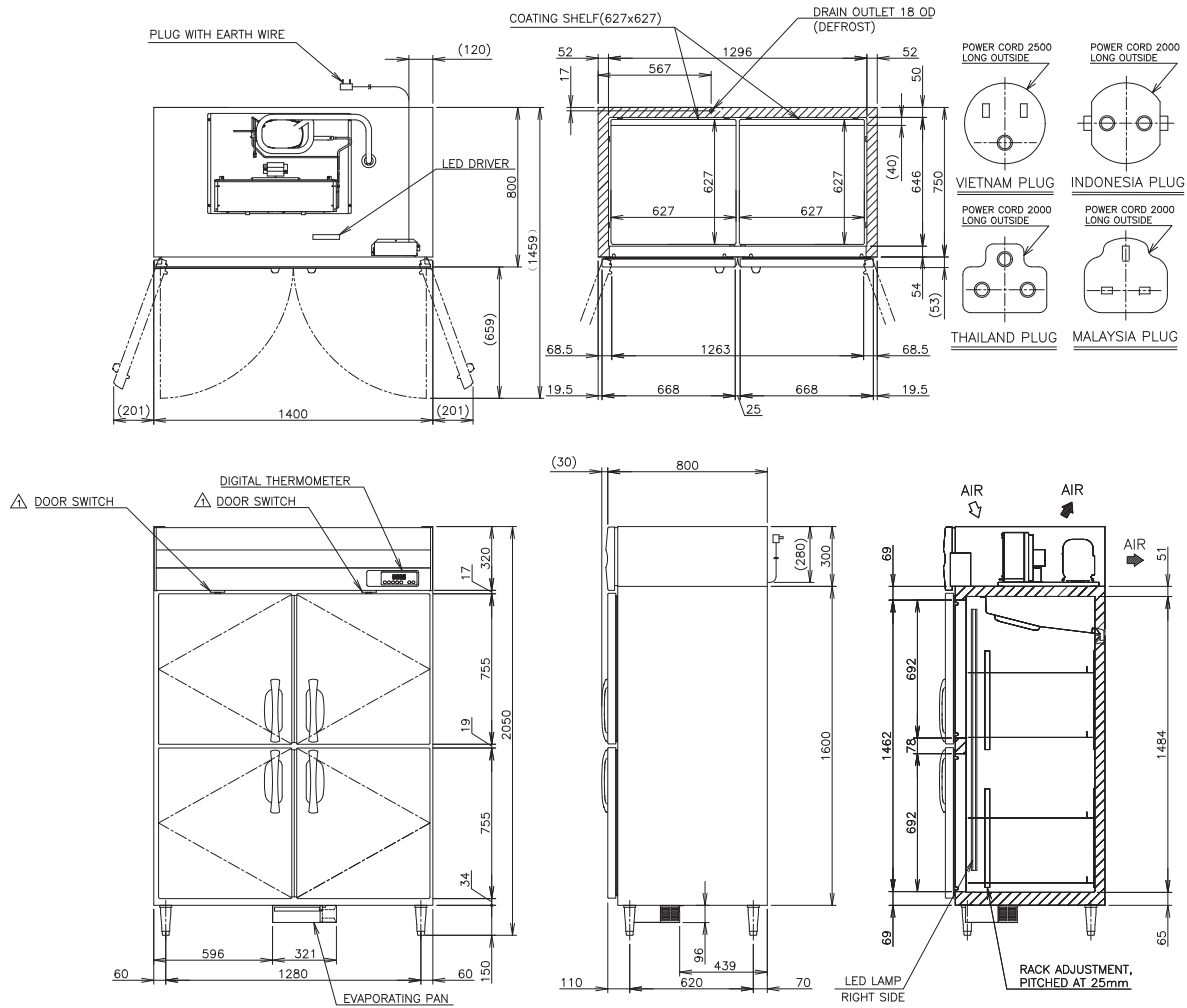

MODEL	HR-148MC-S-ML
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 0.75kVA (3.50A)
ELECTRIC CONSUMPTION	477W
TEMPERATURE CONTROL	-6 to 12°C
STORAGE CAPACITY	1257L
WEIGHT	Net: 148kg (Gross: Approx. 183kg)
OUTSIDE DIMENSIONS	1400mm(W)× 800mm(D)×2050(-2080)mm(H)
PACKAGE	Carton(Wooden Pallet): 1460mm(W)×900mm(D)×2075mm(H)
NUMBER OF SHELVES	8
REFRIGERANT	R290
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI

HOSHIZAKI MALAYSIA SDN. BHD.

No. 12, Jalan Penyajak U1/45B. Hicom-Glenmarie Industrial Park, 40150 Shah Alam, Selangor

TEL (+60) 3 5569 8023 <https://hoshizaki.com.my/>

