



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001



Compliant with IEC60335-2-89 Standard

RT-188MC-S-ST

UNDERCOUNTER BAKERY REFRIGERATOR



Key Features



Lower running cost




Powerful cooling performance



Self Closing Door



Removal door gaskets



Round Interior Corners



Large and clear display




Drainage-Free Design



LED lighting



Dimensions & Specifications

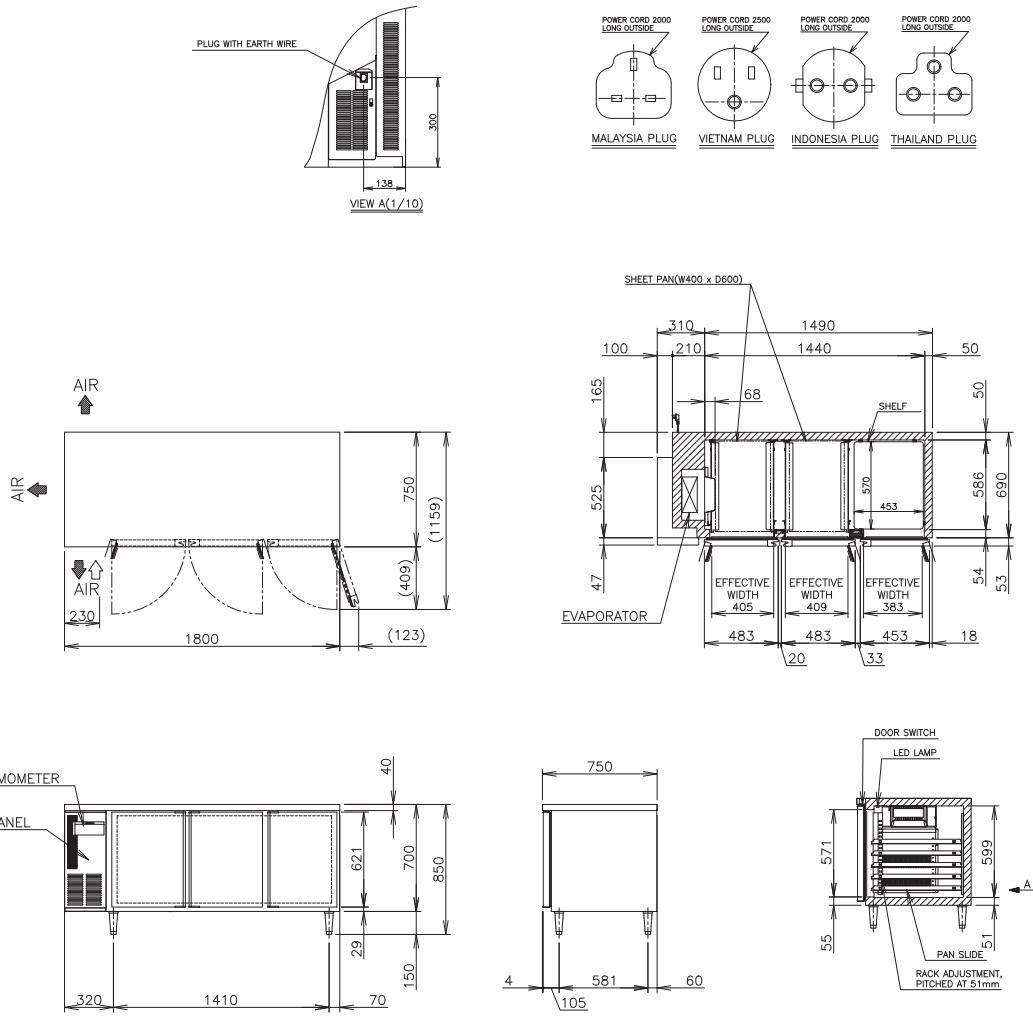

| | |
|------------------------------|---|
| MODEL | RT-188MC-S-ST |
| POWER SUPPLY | 1 Phase 220-240V 50Hz Capacity: 0.41kVA (1.86A) |
| ELECTRIC CONSUMPTION | 226W |
| TEMPERATURE CONTROL | -6 to 12°C |
| STORAGE CAPACITY | 536L |
| WEIGHT | Net: 115kg (Gross: Approx. 127kg) |
| OUTSIDE DIMENSIONS | 1800mm(W)× 750mm(D)×850(-880)mm(H) |
| PACKAGE | Carton: 1865mm(W)×830mm(D)×845mm(H) |
| NUMBER OF SHELVES | 2 |
| PITCHED (W400 x D600) | 51mm (Max: 9 Tiers) |
| ACCESSORY | Bakery tray is not included |
| REFRIGERANT | R290 |
| OPERATING CONDITIONS | Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6% |



HOSHIZAKI MALAYSIA SDN. BHD.

No. 12, Jalan Penyajak U1/45B. Hicom-Glenmarie Industrial Park, 40150 Shah Alam, Selangor

TEL (+60) 3 5569 8023 <https://hoshizaki.com.my/>

