



HOSHIZAKI

CERTIFICATION



ISO9002

HR-78MA-S-JD THAWING CABINET



Key Features




4 Steps Thawing



Uniform Temperature



Lower Running Cost



LED Lighting



Drainage-Free Design




Large and Clear Display



Rounded Corner



Dimensions & Specifications

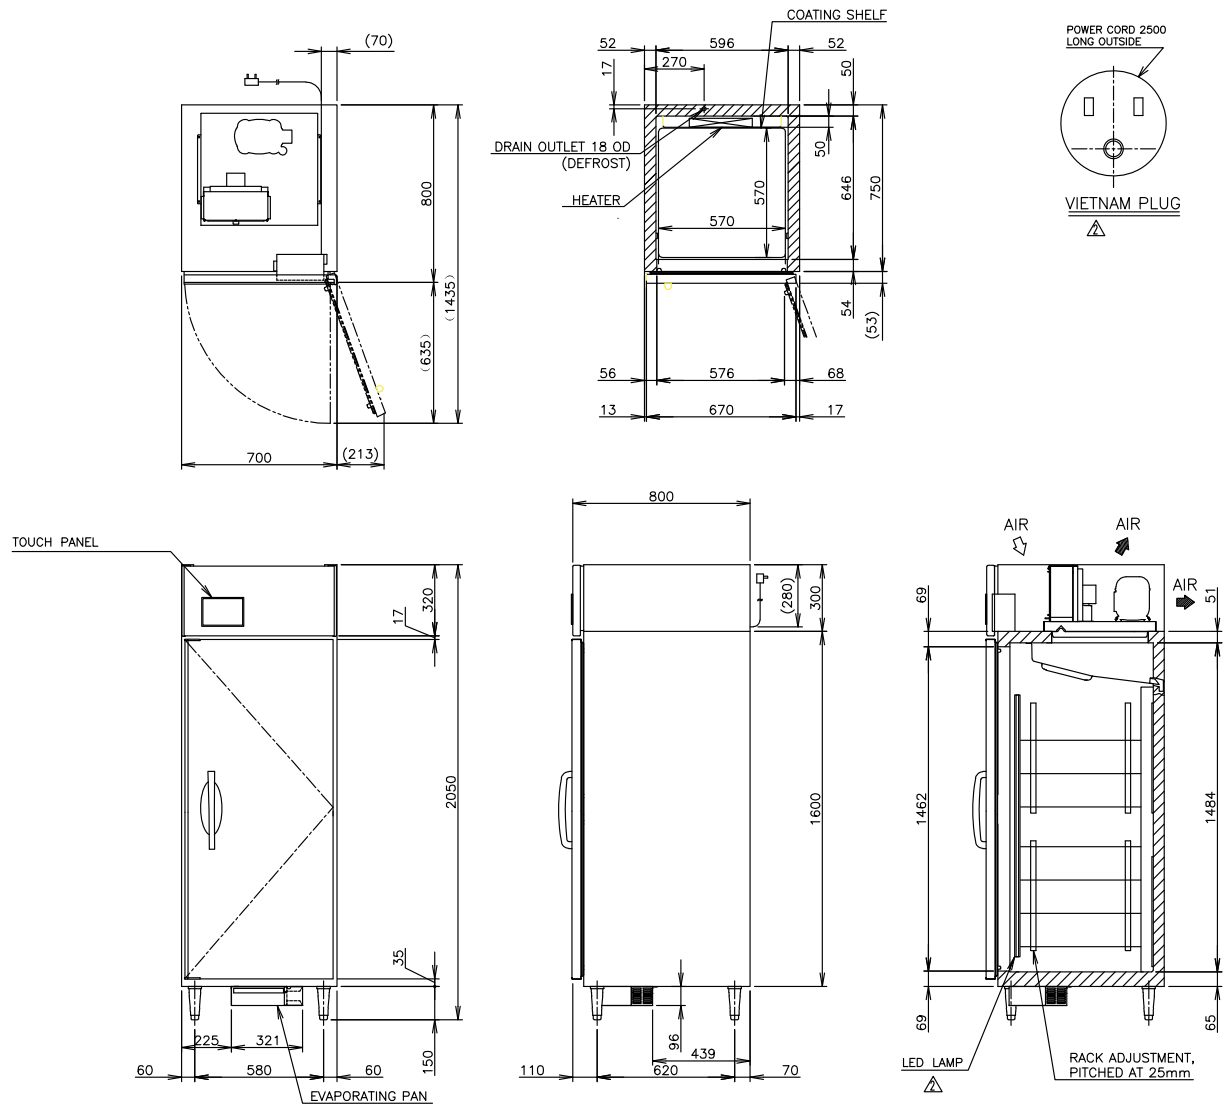

MODEL	HR-78MA-S-JD
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 1.49kVA (6.5A)
ELECTRIC CONSUMPTION	225W Heater: 930W Refrigeration: 326W Defrost: 250W
TEMPERATURE CONTROL	Refrigerator: -6 to 12°C Thawing: 2 to 20°C
EFFECTIVE CAPACITY	525L
THAWING CABINET	Warm air circulation defrosting
WEIGHT	Net: 105kg (Gross 130kg)
OUTSIDE DIMENSIONS	700mm(W) x 800mm(D) x 2050(-2080)mm(H)
PACKAGE	Carton: (wooden box) 760mm(W) x 900mm(D) x 2075mm(H)
AMPERAGE	Rated: 2.1A Starting: 11.3A
SHELF	7 pcs
ACCESSORIES	Drain Hose x 1, Drain Pan x 1
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage $\pm 6\%$



HOSHIZAKI

HOSHIZAKI VIETNAM CORPORATION

168/14 Nguyen Gia Tri, Thanh My Tay Ward, Ho Chi Minh City

Vietnam 760000

TEL +84 0 916 161 346 <https://hoshizaki-sea.com/>

