



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001

IM-130A Cube Ice Maker



Key Features



Hard and Crystal-Clear Ice



Perfect Taste



Perfect Shape



Perfect Dilution



Easy for maintenance


Our is perfectly symmetrical and leaves a good impression with its hard, crystal clear quality that melts very slowly; allowing customers to enjoy their favourite drink longer. The IM series allows more flexibility of application with each range offering ice in variable sizes along side a design for uncomplicated usage from start to finish.

Our is produced by spraying water into an ice-making chamber cooled to -25°C . As freezes gradually, effectively eliminating nearly 100% of impurities.

A fully closed water circuit ensures maximum protection against any form of contamination.



Dimensions & Specifications

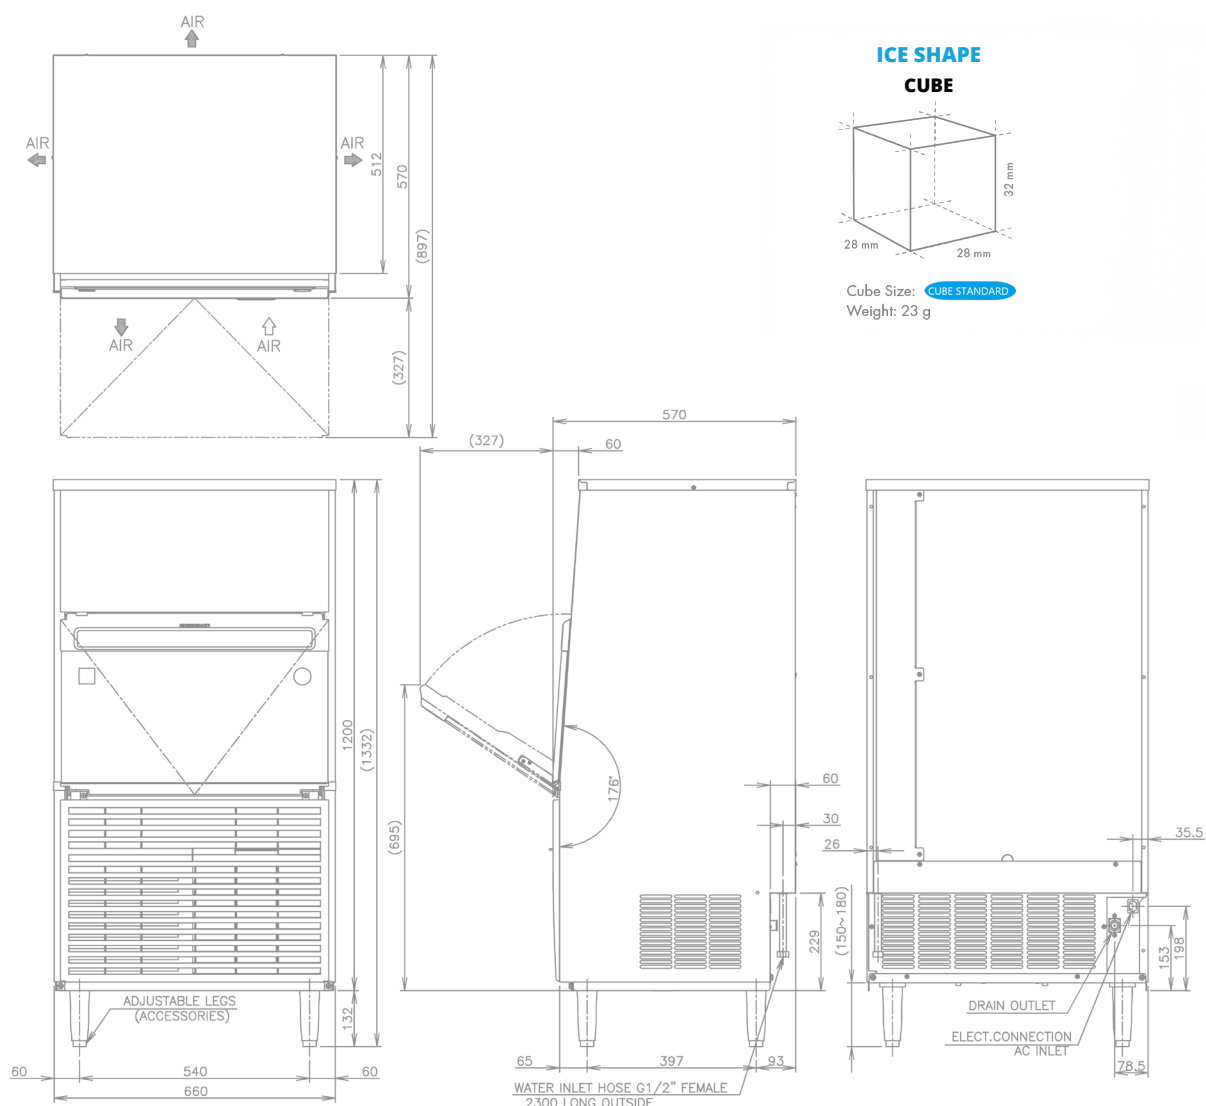

MODEL		IM-130A
ICE SHAPE		Cube Ice (28 x 28 x 32mm / 23g)
POWER SUPPLY		1 Phase 220-240V 50Hz, Capacity Min: 1.40kVA (5.8A)
AMPERAGE		4.3A, Starting 18.6A
ELECTRIC CONSUMPTION		660W
HEAT REJECTION		(AT32°C / WT21°C) 1555W
ICE PRODUCTION PER 24H	(AT10°C / WT10°C)	126kg
	(AT21°C / WT15°C)	125kg
	(AT32°C / WT21°C)	100kg
		Approx. 52kg
STORAGE CAPACITY		190L
WATER CONSUMPTION PER 24H	(AT32°C / WT21°C)	R404A/450g
REFRIGERANT		660mm(W) x 570mm(D) x 1200mm(H)
OUTSIDE DIMENSIONS		Carton 760mm(W) x 680mm(D) x 1379mm(H)
PACKAGE		Net weight 79kg / Gross
WEIGHT		Ambient Temp.:1-40°C, Water Supply Temp.:5-35°C, Water Supply Pressure: 0.07-0.78MPa (0.7-8bar), Voltage Range: Rated Voltage±6%
OPERATING CONDITIONS		



HOSHIZAKI

HOSHIZAKI SINGAPORE PTE. LTD.

18 Boon Lay Way #01-102 Tradehub21, 609966

TEL 6225 2612 FAX 6225 3219

www.hoshizaki.com.sg

