



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001

IM-130A

Cube Ice Maker



Key Features



Hard and Crystal-Clear Ice



Perfect Taste



Perfect Shape



Perfect Dilution



Easy for maintenance


Our is perfectly symmetrical and leaves a good impression with its hard, crystal clear quality that melts very slowly; allowing customers to enjoy their favourite drink longer. The IM series allows more flexibility of application with each range offering ice in variable sizes along side a design for uncomplicated usage from start to finish.

Our is produced by spraying water into an ice-making chamber cooled to -25°C . As freezes gradually, effectively eliminating nearly 100% of impurities.

A fully closed water circuit ensures maximum protection against any form of contamination.



Dimensions & Specifications

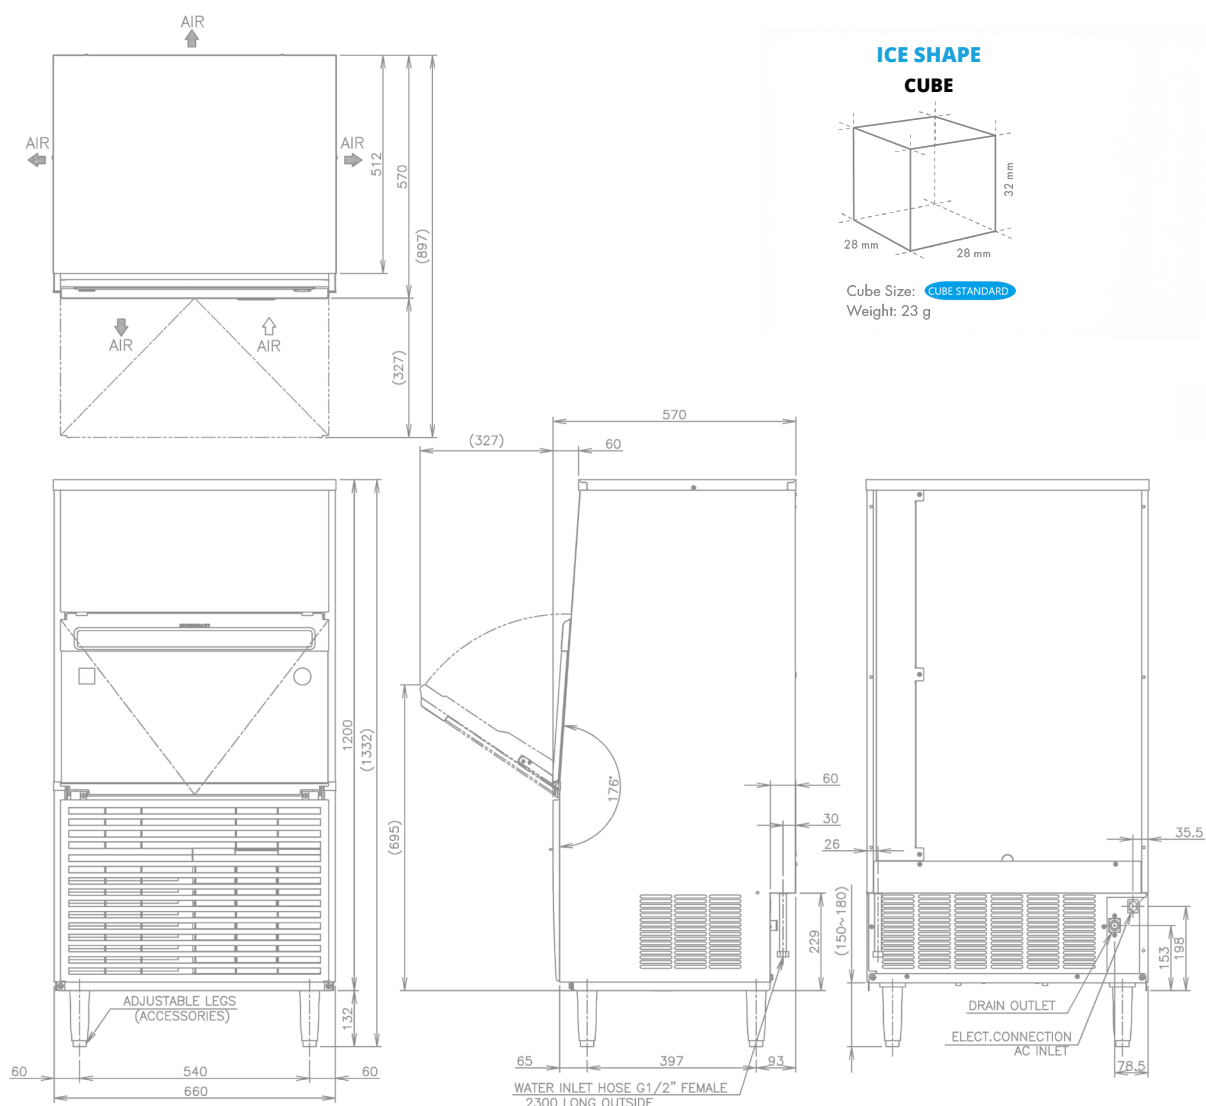

MODEL		IM-130A
ICE SHAPE		Cube Ice (28 x 28 x 32mm / 23g)
POWER SUPPLY		1 Phase 220-240V 50Hz, Capacity Min: 1.40kVA (5.8A)
AMPERAGE		4.3A, Starting 18.6A
ELECTRIC CONSUMPTION		660W
HEAT REJECTION		(AT32°C / WT21°C) 1555W
ICE PRODUCTION PER 24H	(AT10°C / WT10°C)	126kg
	(AT21°C / WT15°C)	125kg
	(AT32°C / WT21°C)	100kg
		Approx. 52kg
STORAGE CAPACITY		190L
WATER CONSUMPTION PER 24H		(AT32°C / WT21°C) R404A/450g
REFRIGERANT		660mm(W) x 570mm(D) x 1200mm(H)
OUTSIDE DIMENSIONS		Carton 760mm(W) x 680mm(D) x 1379mm(H)
PACKAGE		Net weight 79kg / Gross
WEIGHT		Ambient Temp.:1-40°C, Water Supply Temp.:5-35°C, Water Supply Pressure: 0.07-0.78MPa (0.7-8bar), Voltage Range: Rated Voltage±6%
OPERATING CONDITIONS		



HOSHIZAKI

HOSHIZAKI (THAILAND) LIMITED

No. 99 CP Tower North Park building 9th Floor, Zone D1 Soi
Ngamwongwan 47 Intersection 42, Thung Song Hong
Subdistrict, Lak Si District, Bangkok 10210 Thailand
TEL +66 2 005 9980 FAX +66 2 516 2646
<https://hoshizaki-sea.com/>

