



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001

IM-220AA-21-B-301SA

Cube Ice Maker



Key Features



Hard and Crystal-Clear Ice



Perfect Taste



Perfect Shape



Perfect Dilution



Easy for maintenance




Our is perfectly symmetrical and leaves a good impression with its hard, crystal clear quality that melts very slowly; allowing customers to enjoy their favourite drink longer. The IM series allows more flexibility of application with each range offering ice in variable sizes along side a design for uncomplicated usage from start to finish.

Our is produced by spraying water into an ice-making chamber cooled to -25°C. As freezes gradually, effectively eliminating nearly 100% of impurities.


A fully closed water circuit ensures maximum protection against any form of contamination.



Dimensions & Specifications

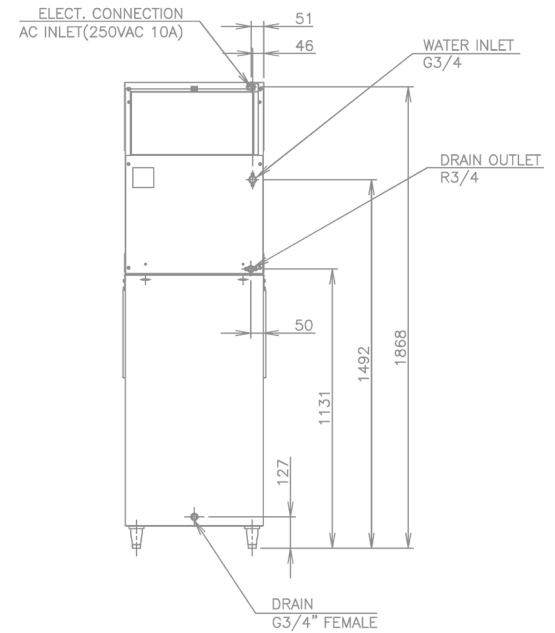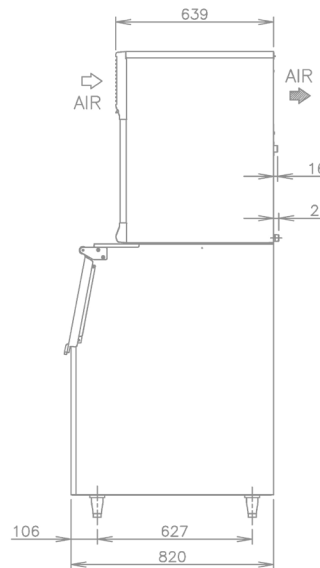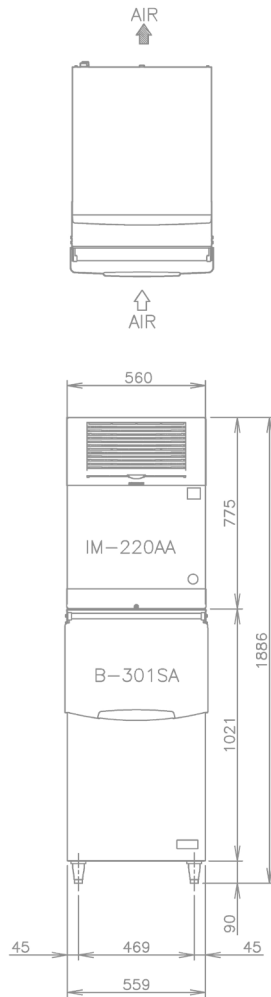

ICE SHAPE CUBE



Cube size: **XS-21**
Weight: 6 g

MODEL		IM-220AA-21-B-301SA
ICE SHAPE		Cube Ice (21 x 21 x 14mm / 6g) Ball Ice (Φ45mm / 45g)
POWER SUPPLY		1 Phase 220-240V 50Hz, Capacity Min: 2.4kVA (10.0A)
AMPERAGE		5.3A, Starting 38A
ELECTRIC CONSUMPTION		950W
HEAT REJECTION		(AT32°C / WT21°C) 2250W
ICE PRODUCTION PER 24H	(AT10°C / WT10°C)	165kg
	(AT21°C / WT15°C)	160kg
	(AT32°C / WT21°C)	155kg
		Approx. 144kg
STORAGE CAPACITY		390L
WATER CONSUMPTION PER 24H		(AT32°C / WT21°C) R404A/500g
REFRIGERANT		560mm(W) x 820mm(D) x 1886mm(H)
OUTSIDE DIMENSIONS		Ice Maker: Carton: 644 x 728 x 878mm
PACKAGE		Ice Maker: 69kg / 76kg
WEIGHT		Ambient Temp.:1-40°C, Water Supply Temp.:5-35°C, Water Supply Pressure: 0.07-0.78MPa (0.7-7.8bar), Voltage Range: Rated Voltage±6%
OPERATING CONDITIONS		



HOSHIZAKI

HOSHIZAKI MALAYSIA SDN. BHD.

No. 12, Jalan Penyajak U1/45B. Hicom-Glenmarie
Industrial Park, 40150 Shah Alam, Selangor
TEL (+60) 3 5569 8023 <https://hoshizaki.com.my/>

