



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001

IM-220AA-B-301SA

Cube Ice Maker




Key Features



Hard and Crystal-Clear Ice



Perfect Taste



Perfect Shape



Perfect Dilution



Easy for maintenance


Our is perfectly symmetrical and leaves a good impression with its hard, crystal clear quality that melts very slowly; allowing customers to enjoy their favourite drink longer. The IM series allows more flexibility of application with each range offering ice in variable sizes along side a design for uncomplicated usage from start to finish.

Our is produced by spraying water into an ice-making chamber cooled to -25°C . As freezes gradually, effectively eliminating nearly 100% of impurities.

A fully closed water circuit ensures maximum protection against any form of contamination.



Dimensions & Specifications

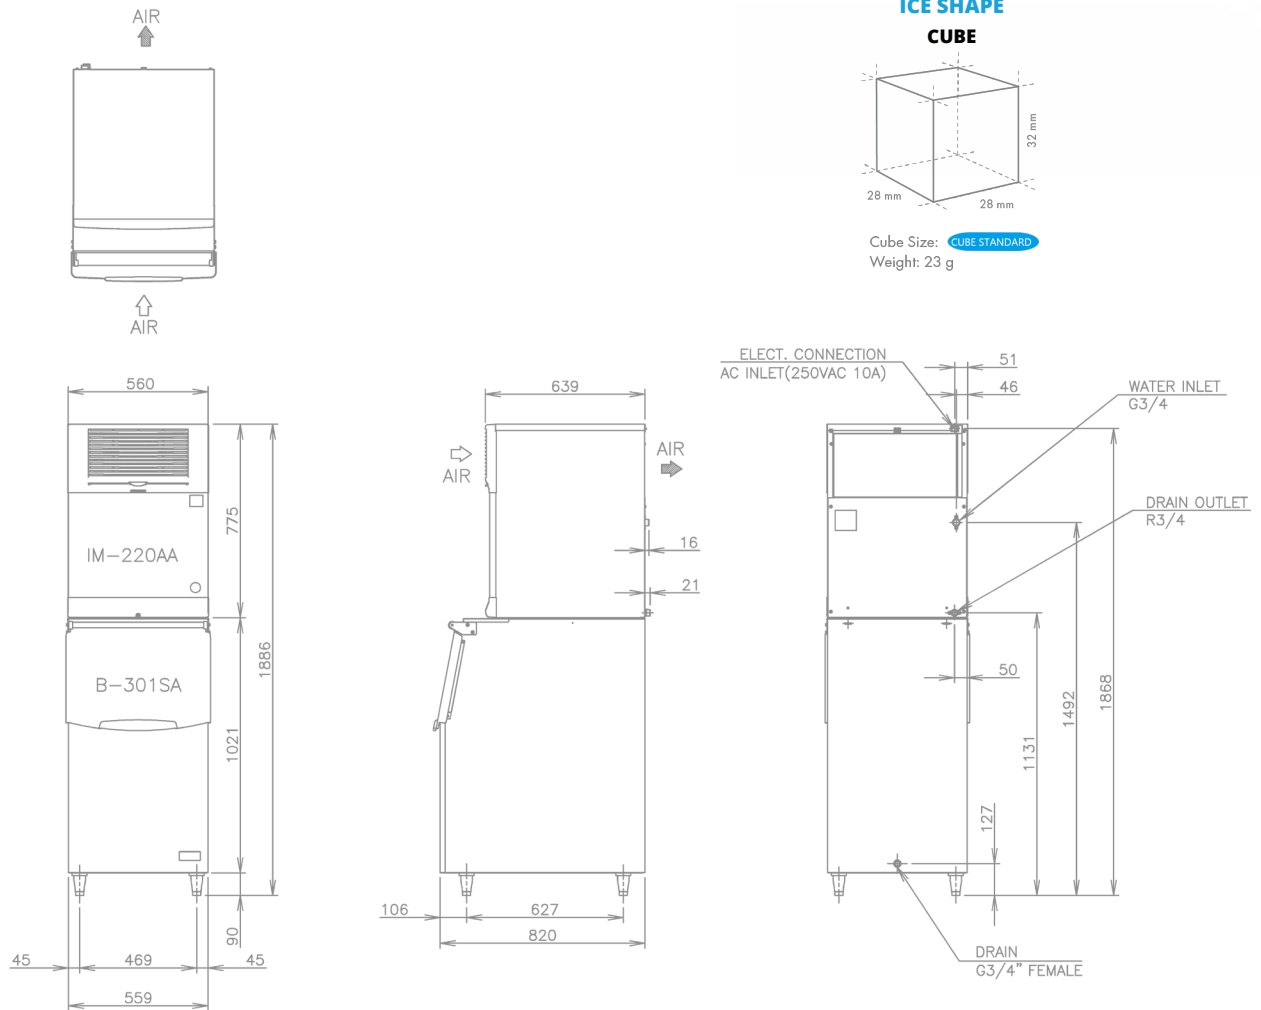

MODEL		IM-220AA-B-301SA	
ICE SHAPE		Cube Ice (28 x 28 x 32mm / 23g)	
POWER SUPPLY		1 Phase 220-240V 50Hz, Capacity Min: 2.4kVA (10A)	
AMPERAGE		5.3A, Starting 38A	
ELECTRIC CONSUMPTION		950W	
HEAT REJECTION		(AT32°C / WT21°C)	2250W
ICE PRODUCTION PER 24H		(AT10°C / WT10°C)	220kg
		(AT21°C / WT15°C)	200kg
		(AT32°C / WT21°C)	175kg
STORAGE CAPACITY		Approx. 144kg	
WATER CONSUMPTION PER 24H		(AT32°C / WT21°C)	270L
REFRIGERANT		R404A/500g	
OUTSIDE DIMENSIONS		560mm(W) x 820mm(D) x 1886mm(H)	
PACKAGE		Ice Maker: Carton: 644 x 728 x 878mm	
WEIGHT		Ice Maker: 69kg / 76kg	
OPERATING CONDITIONS		Ambient Temp.:1-40°C, Water Supply Temp.:5-35°C, Water Supply Pressure: 0.07-0.78MPa (0.7-7.8bar), Voltage Range: Rated Voltage±6%	



HOSHIZAKI

HOSHIZAKI (THAILAND) LIMITED

No. 99 CP Tower North Park building 9th Floor, Zone D1 Soi
Ngamwongwan 47 Intersection 42, Thung Song Hong
Subdistrict, Lak Si District, Bangkok 10210 Thailand
TEL +66 2 005 9980 FAX +66 2 516 2646
<https://hoshizaki-sea.com/>

