



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001

IM-240DNS-B-801SA

Cube Ice Maker



Key Features



Hard and Crystal-Clear Ice



Perfect Taste



Perfect Shape



Perfect Dilution



Tropical Conditions


Cube ice is perfectly symmetrical and leaves a good impression with its hard, crystal clear quality that melts very slowly; allowing customers to enjoy their favourite drink longer. The IM series allows more flexibility of application with each range offering ice in variable sizes alongside a design for uncomplicated usage from start to finish.

Our is produced by spraying water into an ice-making chamber cooled to -25°C. As freezes gradually, effectively eliminating nearly 100% of impurities.

A fully closed water circuit ensures maximum protection against any form of contamination.




Dimensions & Specifications

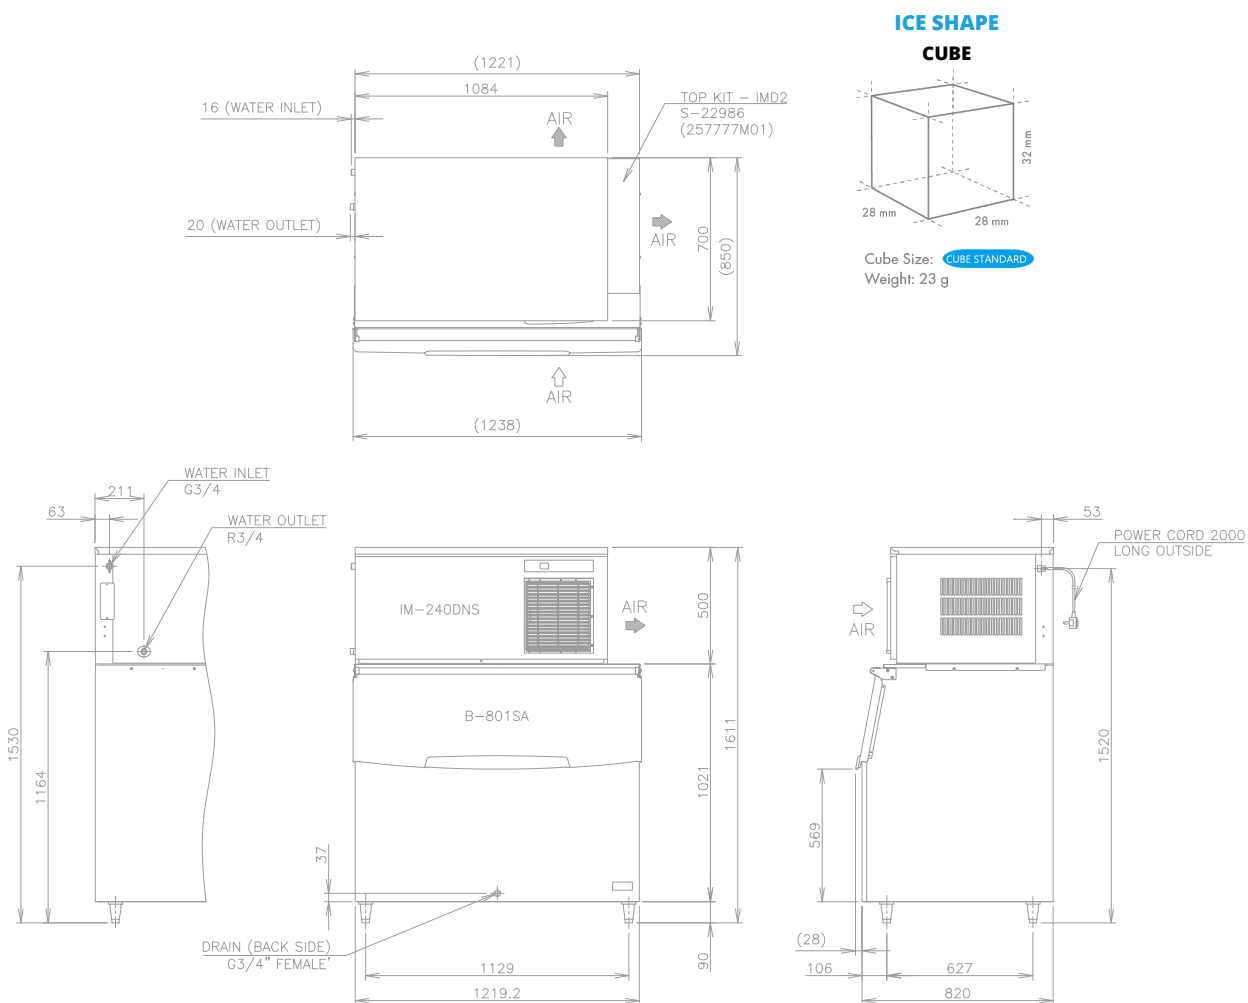

ICE SHAPE

CUBE



Cube Size: **CUBE STANDARD**

Weight: 23 g

MODEL		IM-240DNS-B-801SA
ICE SHAPE		Cube Ice (28 x 28 x 32mm / 23g)
POWER SUPPLY		1 Phase 220-240V 50Hz Capacity: 2.3kVA (9.6A)
AMPERAGE		6.6A, Starting 35A
ELECTRIC CONSUMPTION		1330W
HEAT REJECTION		(AT32°C / WT21°C) 2870W
ICE PRODUCTION PER 24H	(AT10°C / WT10°C)	240kg
	(AT21°C / WT15°C)	220kg
	(AT32°C / WT21°C)	190kg
STORAGE CAPACITY		Approx. 348kg
WATER CONSUMPTION PER 24H	(AT32°C / WT21°C)	420L
REFRIGERANT		R404A/480g
OUTSIDE DIMENSIONS		1219.2mm(W)×820mm(D)×1611mm(H)
PACKAGE		Ice Maker: Carton: 1196 x 825 x 640mm
WEIGHT		Ice Maker: 88kg / 101kg
OPERATING CONDITIONS		Ambient Temp: 1 - 40°C, Water Supply Temp: 5-35°C, Water Supply Pressure: 0.07-0.78MPa(0.7-8bar), Voltage Range: Rated Voltage±6



HOSHIZAKI

HOSHIZAKI MALAYSIA SDN. BHD.

No. 12, Jalan Penyajak U1/45B. Hicom-Glenmarie
Industrial Park, 40150 Shah Alam, Selangor
TEL (+60) 3 5569 8023 <https://hoshizaki.com.my/>

