



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001

IM-45CNS

Cube Ice Maker




Key Features



Hard and Crystal-Clear Ice



Perfect Taste



Perfect Shape



Perfect Dilution



Easy for maintenance


Our is perfectly symmetrical and leaves a good impression with its hard, crystal clear quality that melts very slowly; allowing customers to enjoy their favourite drink longer. The IM series allows more flexibility of application with each range offering ice in variable sizes along side a design for uncomplicated usage from start to finish.

Our is produced by spraying water into an ice-making chamber cooled to -25°C . As freezes gradually, effectively eliminating nearly 100% of impurities.


A fully closed water circuit ensures maximum protection against any form of contamination.






Dimensions & Specifications

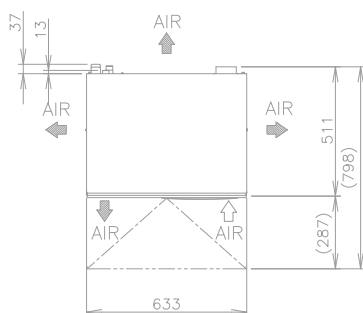

ICE SHAPE CUBE



Cube Size: **CUBE STANDARD**
Weight: 23 g

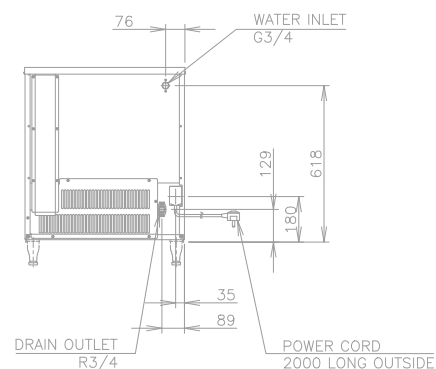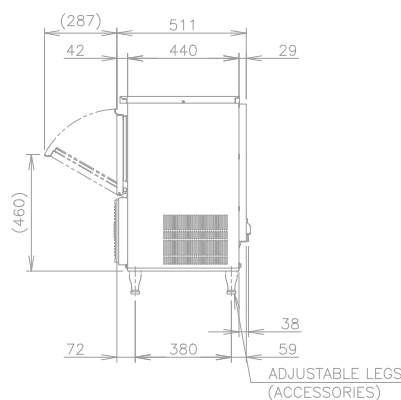

MODEL		IM-45CNS
ICE SHAPE		Cube Ice (28 x 28 x 32mm / 23g)
POWER SUPPLY		1 Phase 220-240V 50Hz, Capacity Min: 0.86kVA (3.6A)
AMPERAGE		2.4A, Starting: 13A
ELECTRIC CONSUMPTION		320W
HEAT REJECTION		640W
ICE PRODUCTION PER 24H	(AT32°C / WT21°C)	44kg
	(AT10°C / WT10°C)	40kg
	(AT21°C / WT15°C)	32kg
	(AT32°C / WT21°C)	32kg
STORAGE CAPACITY		Approx. 15kg
WATER CONSUMPTION PER 24H	(AT32°C / WT21°C)	90L
REFRIGERANT		R134a/160g
OUTSIDE DIMENSIONS		633mm (W) x 511mm (D) x 690mm (H)
PACKAGE		Carton 735mm (W) x 570mm (D) x 864mm
WEIGHT		Net weight 48kg / Gross
OPERATING CONDITIONS		Ambient Temp: 1 - 40°C, Water Supply Temp: 5-35°C, Water Supply Pressure: 0.07-0.8MPa (0.7-8bar), Voltage Range: Rated Voltage±10%



HOSHIZAKI

HOSHIZAKI MALAYSIA SDN. BHD.

No. 12, Jalan Penyajak U1/45B. Hicom-Glenmarie
Industrial Park, 40150 Shah Alam, Selangor
TEL (+60) 3 5569 8023 <https://hoshizaki.com.my/>

