



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001

IM-45CNS

Cube Ice Maker




Key Features



Hard and Crystal-Clear Ice



Perfect Taste



Perfect Shape



Perfect Dilution



Easy for maintenance


Our is perfectly symmetrical and leaves a good impression with its hard, crystal clear quality that melts very slowly; allowing customers to enjoy their favourite drink longer. The IM series allows more flexibility of application with each range offering ice in variable sizes along side a design for uncomplicated usage from start to finish.

Our is produced by spraying water into an ice-making chamber cooled to -25°C . As freezes gradually, effectively eliminating nearly 100% of impurities.


A fully closed water circuit ensures maximum protection against any form of contamination.






Dimensions & Specifications

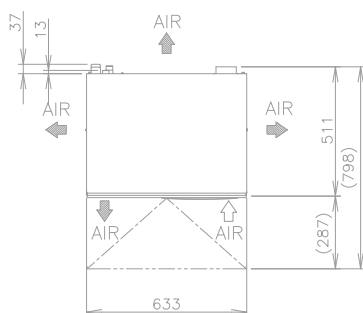

ICE SHAPE CUBE



Cube Size: **CUBE STANDARD**
Weight: 23 g

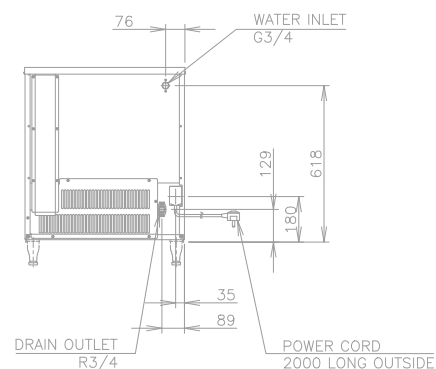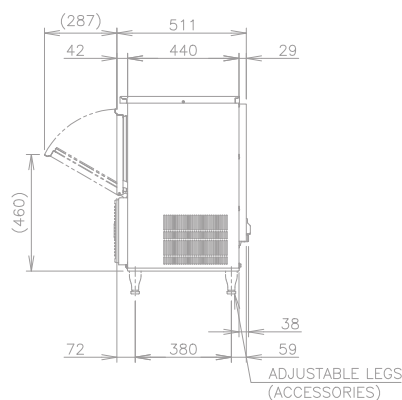

MODEL		IM-45CNS
ICE SHAPE		Cube Ice (28 x 28 x 32mm / 23g)
POWER SUPPLY		1 Phase 220-240V 50Hz, Capacity Min: 0.86kVA (3.6A)
AMPERAGE		2.4A, Starting: 13A
ELECTRIC CONSUMPTION		320W
HEAT REJECTION		640W
ICE PRODUCTION PER 24H	(AT32°C / WT21°C)	44kg
	(AT10°C / WT10°C)	40kg
	(AT21°C / WT15°C)	32kg
	(AT32°C / WT21°C)	32kg
STORAGE CAPACITY		Approx. 15kg
WATER CONSUMPTION PER 24H		90L
REFRIGERANT		R134a/160g
OUTSIDE DIMENSIONS		633mm (W) x 511mm (D) x 690mm (H)
PACKAGE		Carton 735mm (W) x 570mm (D) x 864mm
WEIGHT		Net weight 48kg / Gross
OPERATING CONDITIONS		Ambient Temp: 1 - 40°C, Water Supply Temp: 5-35°C, Water Supply Pressure: 0.07-0.8MPa (0.7-8bar), Voltage Range: Rated Voltage±10%



HOSHIZAKI

HOSHIZAKI (THAILAND) LIMITED

No. 99 CP Tower North Park building 9th Floor, Zone D1 Soi
Ngamwongwan 47 Intersection 42, Thung Song Hong
Subdistrict, Lak Si District, Bangkok 10210 Thailand
TEL +66 2 005 9980 FAX +66 2 516 2646
<https://hoshizaki-sea.com/>

