



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001

IM-480DNS-B-801SA

Cube Ice Maker




Key Features



Hard and Crystal-Clear Ice



Perfect Taste



Perfect Shape



Perfect Dilution



Tropical Conditions


Cube ice is perfectly symmetrical and leaves a good impression with its hard, crystal clear quality that melts very slowly; allowing customers to enjoy their favourite drink longer. The IM series allows more flexibility of application with each range offering ice in variable sizes alongside a design for uncomplicated usage from start to finish.

Our is produced by spraying water into an ice-making chamber cooled to -25°C. As freezes gradually, effectively eliminating nearly 100% of impurities.

A fully closed water circuit ensures maximum protection against any form of contamination.



Dimensions & Specifications

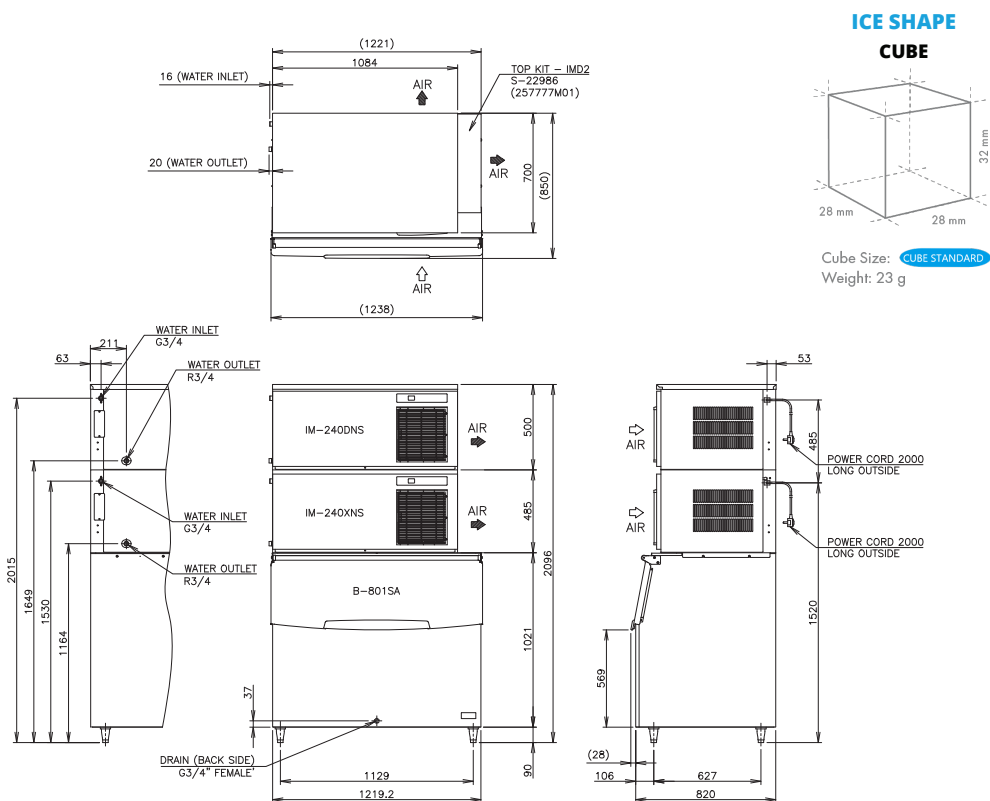

MODEL		IM-480DNS-B-801SA
ICE SHAPE		Cube Ice (28 x 28 x 32mm / 23g)
POWER SUPPLY		1 Phase 220-240V 50Hz Capacity: 2.1kVA x 2 (8.8A x 2)
AMPERAGE		6.4A x 2, Starting 31A x 2
ELECTRIC CONSUMPTION		1330W x 2
HEAT REJECTION	(AT32°C / WT21°C)	5740W
ICE PRODUCTION PER 24H	(AT10°C / WT10°C)	480kg
	(AT21°C / WT15°C)	440kg
	(AT32°C / WT21°C)	380kg
STORAGE CAPACITY		Approx. 348kg
WATER CONSUMPTION PER 24H	(AT32°C / WT21°C)	700L
REFRIGERANT		R404A/480g x 2
OUTSIDE DIMENSIONS		1219.2mm(W)×820mm(D)×2096mm(H)
PACKAGE	ICE MAKER	IM-240DNS: Carton 1196mm(W) x 825mm(D) x 640mm(H)
	CRUISHER	IM-240XNS: Carton 1196mm(W) x 825mm(D) x 640mm(H)
	STORAGE BIN	B-801SA: Carton 1239mm(W) x 916mm(D) x 1142mm(H)
WEIGHT	ICE MAKER	IM-240DNS: Net weight 88kg / Gross weight 101kg
	CRUISHER	IM-240XNS: Net weight 84kg / Gross weight 98kg
	STORAGE BIN	B-801SA: Net weight 64kg / Gross weight 86kg
OPERATING CONDITIONS		Ambient Temp: 1 - 40°C, Water Supply Temp: 5-35°C, Water Supply Pressure: 0.5-7.8bar(0.05-0.78MPa), Voltage Range: Rated Voltage±6%
AVAILABLE ON BINS		B-801SA



HOSHIZAKI

PT. HOSHIZAKI INDONESIA

